



# TEST REPORT IES LM-79-08

## TÜV SÜD Test Report for Electrical and Photometric Measurements of Solid-State Lighting Products

Report reference No. ....	70.402.17.014.42-16
Date of issue .....	2018-10-29
Project handler.....	Mr. Kaishuang LI
Testing laboratory.....	TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch
Address .....	No. 151 Hengtong Road, 200070, Shanghai, P.R.China.
Testing procedure .....	<input type="checkbox"/> TMP <input type="checkbox"/> WMTL <input type="checkbox"/> SMTL <input type="checkbox"/> LTR
Testing location .....	No. 1999, Duhui Road, Shanghai, 201108, P. R. China
Client .....	Everlite LED Lighting Co., Limited
Client number.....	91783
Address .....	Room 2105, Trend Centre, 29-31, Cheung Lee Street, Chaiwan, Hong Kong
Contact person.....	Jackie ZHANG
Standard .....	This TÜV SÜD test program is based on the following requirements: IES LM-79-08
TRF originated by .....	TÜV SÜD Product Service GmbH, Mr. Kenneth Lau
Copyright blank test report .....	This test report is based on the content of the standard (see above). The test report considered selected clauses of the a.m. standard(s) and experience gained with product testing. It was prepared by TÜV SÜD Product Service GmbH.  TUV SUD Group takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.
Test procedure .....	<input type="checkbox"/> TÜV Mark <input checked="" type="checkbox"/> without certification
Non-standard test method.....	N/A
National deviations .....	N/A
Number of pages (Report) .....	18
Number of pages (Attachments) .....	N/A
Compiled by .....	Approved by .....
(+ signature)  	(+ signature) 
Mr. Kaishuang LI	Ms. Lucy LU



Test sample .....	1 pre-production sample from factory	
Type of test object .....	LED Luminaire (LED Street Light)	
Trade mark .....	N/A	
Model and/or type reference .....	EL-SL18MA-50W-4000K	
Lens type .....	TYPE II	
Rating(s) .....	220-240V AC, 50/60Hz, 50W, Class II, IP66	
Manufacturer .....	Ningbo Shishang Photoelectricity Technology Co., Ltd.	
Manufacturer number .....	92974	
Address .....	No.19, KeSan Road, Ninghai, 315600, Ningbo, Zhejiang, People's Republic of China	
Sub-contractors/ tests (clause) .....	N/A	
Name .....	N/A	
Order description .....	<input type="checkbox"/>	Complete test according to TRF
	<input checked="" type="checkbox"/>	Partial test according to manufacturer's specifications
	<input type="checkbox"/>	Preliminary test
	<input type="checkbox"/>	Spot check
	<input type="checkbox"/>	Other:
Date of order .....	2017-12-29	
Date of receipt of test item .....	2018-10-22	
Date(s) of performance of test .....	2018-10-26	
Test item particulars (delared):		
Lamp type :	<input type="checkbox"/>	Bare lamp
	<input type="checkbox"/>	Covered lamp, no reflector
	<input type="checkbox"/>	Lamp with reflector
	<input checked="" type="checkbox"/>	other: LED Street Light
Lamp cap installed :	N/A	
Rated Votage (V) :	220-240	
Rated Power (W) :	50	
Rated Power Factor :	N/A	
Rated Luminous Flux (lm) :	N/A	
Rated CCT (K) :	4000	
Rated CRI :	N/A	



Attachments:

1. Test Equipment List

General remarks:

"(see remark #)" refers to a remark appended to the report.

"(see appended table)" refers to a table appended to the report.

Throughout this report a comma is used as the decimal separator.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced except in full without the written approval of the testing laboratory.

Summary of testing:

☐ deviation(s) found

☒ no deviations found

The test was operated at 230V, 50Hz, in accordance with the applicant's instruction.

Model	Luminous Efficacy (Lumens/Watt)	Total Luminous Flux (Lumens)	Input Power (Watts)
EL-SL18MA-50W-4000K	146,82	7520.05	51.22
Power Factor	CCT (K)	CRI	Stabilisation Time (minutes)
0,9687	4070	71,8	90

Copy of marking plate:

Not provide

Picture of the product:



Characteristic data

Dimension (mm, Height x Width x Length): 249mm\*273mm\*675mm

Weight: approximately : 6,8Kg

Purpose of the product

LED Street light for generally lighting purpose.

Possible test case verdicts:

- test case does not apply to the test object: .....: N(A.) / not included in the order
- test object does meet the requirement.....: P(ass)
- test object does not meet the requirement: .....: F(ail)

Possible suffixes to the verdicts:

- suffix for detailed information for the client.....:- C(omment)
- suffix for important information for factory inspection....: - M(anufacturing)

Clause	Requirement	Test	Measuring result	Remark	Verdict
2.0	Ambient Conditions				P
2.1	General				P
2.2	Air Temperature				P
2.3	Thermal Condition for Mounting SSL Products				P
2.4	Air Movement				P
3.0	Power Supply Characteristics				P
3.1	Waveshape of AC power supply				P
3.2	Voltage regulation				P
4.0	Seasoning of SSL Product		No seasoning of SSL product		P
5.0	Stabilisation of SSL Product		Sufficiently satbilised before measurment		P
6.0	Operation Orientation				P
	SSL product shall be stabilized and measured in intended operating orientation				P
7.0	Electrical Settings				P
	SSL product shall be operated at rated voltage				P
	SSL product with dimming capability are tested at maximum input power condition				N/A
	SSL product with different modes are measured in all relvant modes				N/A
8.0	Electrical Instrumentations				P
8.1	Circuits				P
8.2	Uncertainties				P
9.0	Test methodes for Luminous Flux measurment				P
9.1	Integrating sphere with a spectroradiometer (Sphere-spectroradiometer system)				N/A
9.2	Integrating sphere with a photometer head (Sphere-photometer system)				N/A
9.3	Goniophotometer				P
10.0	Luminous Intensity Distribution				P
	Reporting acc. to IEC LM-63		See table 3		P
11.0	Luminous Efficay		See table 1		P
12.0	Test Methodes for Color Characteristics of SSL Products				P
	Measurments		See table 1		P
13.0	Uncertainty statement				P

Table 1	Test data		
Model	EL-SL18MA-50W-4000K		
Rated Voltage (V):	AC 220-240	Rated Power (W):	50
Rated luminous flux (lm):	N/A	Ambient temperature 25 ±1°C (°C):	25,3
Test item		Measured Value	
		Integrating Sphere	Goniophotometer
Key Photometric Results			
Luminous Efficacy (Lumens/Watt)	-	146,82	
Total Luminous Flux (Lumens)	-	7520,05	
Correlated Color Temperature (CCT)	4070	-	
Color Rendering Index (CRI)	71,8	-	
Chromaticity (Chroma x / Chroma y)	0,3785/0,3792	-	
Chromaticity (Chroma u / Chroma v)	-	-	
Chromaticity (Chroma u' / Chroma v')	0,2229/0,5024	-	
Duv Value	0,0017	-	
SDCM	0,73	-	
Color Angular Uniformity (Max. du'v')	-	-	
Stabilization Time (Light and Power) (Minutes)	90		
Total Run Time – Goniophotometer (Minutes)	150		
Spacing Criteria		C=15° / γ=1°	
Electrical Input Results			
Input Power (Watts)	-	51.22	
Input Voltage (Volts AC)	-	230,0	
Input Current (Amps)	-	0,2299	
Input Frequency (Hertz)	-	50,0	
Power Factor	-	0,9687	
A-THD (Current – Total Harmonic Distortion)	-	-	
Additional Information			
Ambient Temperature (°C):	25,3	25,3	
Photometric measurement condition	-	Photometric distance: 26m	
Number of hours operated prior to measurement	0h		
Orientation (burning position)	Base up, center of the Goniophotometer		
Supplementary Information:			
- Absorbtion Correction used: Yes			
Stabilisation was considered reached by: the variation (maximum-minimum) of at least 3 readings			
- of the light output and electrical power over a period of 30 minutes is less than 0.5%.			





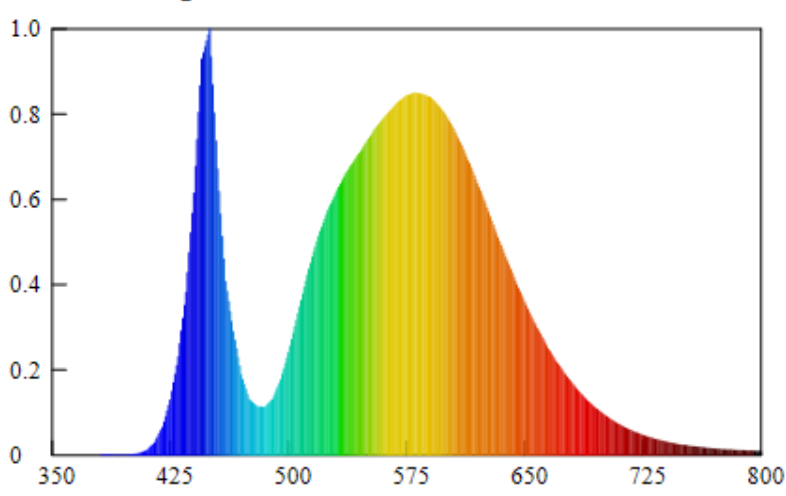
<b>Table 2</b>	<b>SPECTRAL DISTRIBUTION and CHROMATICITY DIAGRAM- CIE 1931</b>
<b>Model</b>	EL-SL18MA-50W-4000K
<p>The following graph shows the spectral response curve of the radiant flux for the sample: (350nm to 780nm – calibrated range of the Spectroradiometer)</p>	
<div>  <p>光谱分布 Spectral Distribution</p> </div> <div>  <p>7SDCM 5SDCM 3SDCM</p> <p>Nominal CCT:IEC_F4000 x0=0.3785 y0=0.3792</p> </div>	

Table 3		LIGHT DISTRIBUTION DIAGRAM			
Model:		EL-SL18MA-50W-4000K			
DATA OF LAMP		PHOTOMETRIC DATA Eff: 146.82 lm/W			
MODEL		I <sub>max</sub> (cd)	4280	η street_up (%)	0.0
NOMINAL POWER (W)	50	LOR (%)	100.0	η street_down (%)	69.9
RATED VOLTAGE (V)	220-240	TOTAL FLUX (lm)	7520.05	η house_up (%)	0.0
NOMINAL FLUX (lm)	7520.05	MAXIMUM @ (C, γ )	150, 31.0	η house_down (%)	30.1
LAMPS INSIDE	1	η up (%)	0.0	76 FLASHAREA (m2)	
TEST VOLTAGE (V)	230	η down (%)	100.0	SLI	

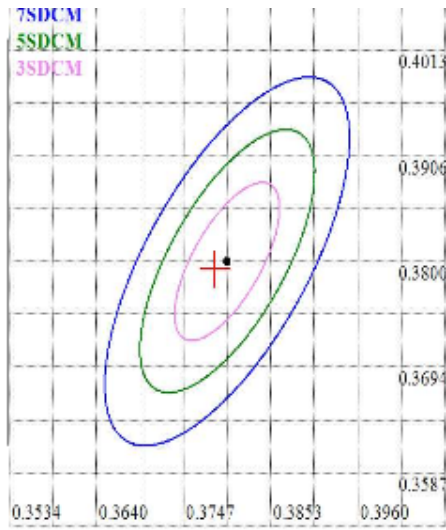
  

**INTENSITY DISTRIBUTION DIAGRAM  
IN C PLANS**

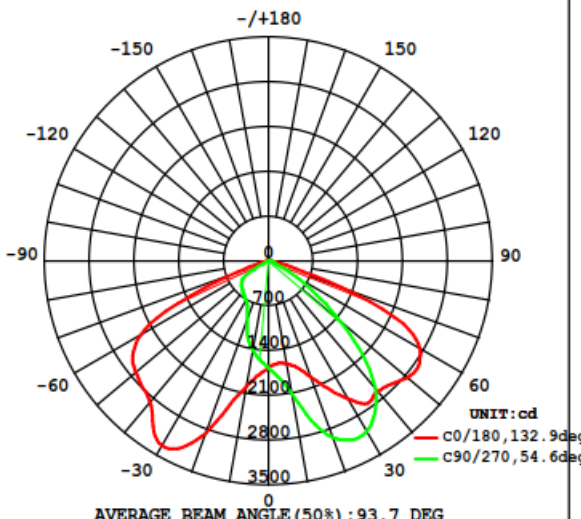

AVERAGE BEAM ANGLE (50%) : 93.7 DEG

**MAX INTENSITY CONE SURFACE  
DISTRIBUTION DIAGRAM**

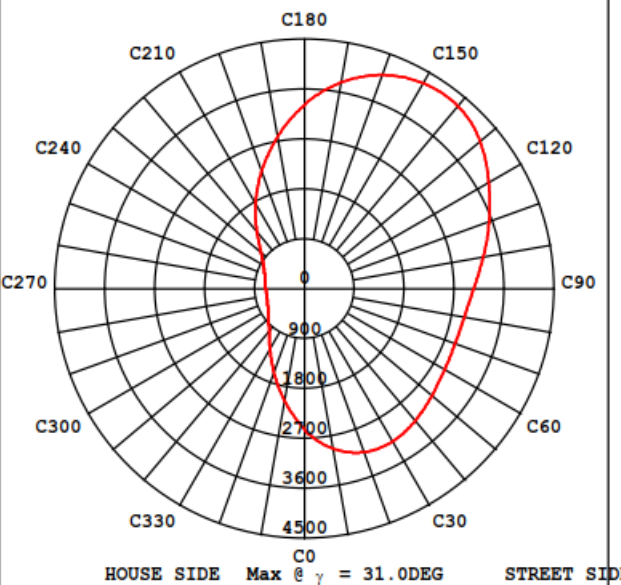

HOUSE SIDE Max @ γ = 31.0DEG STREET SIDE

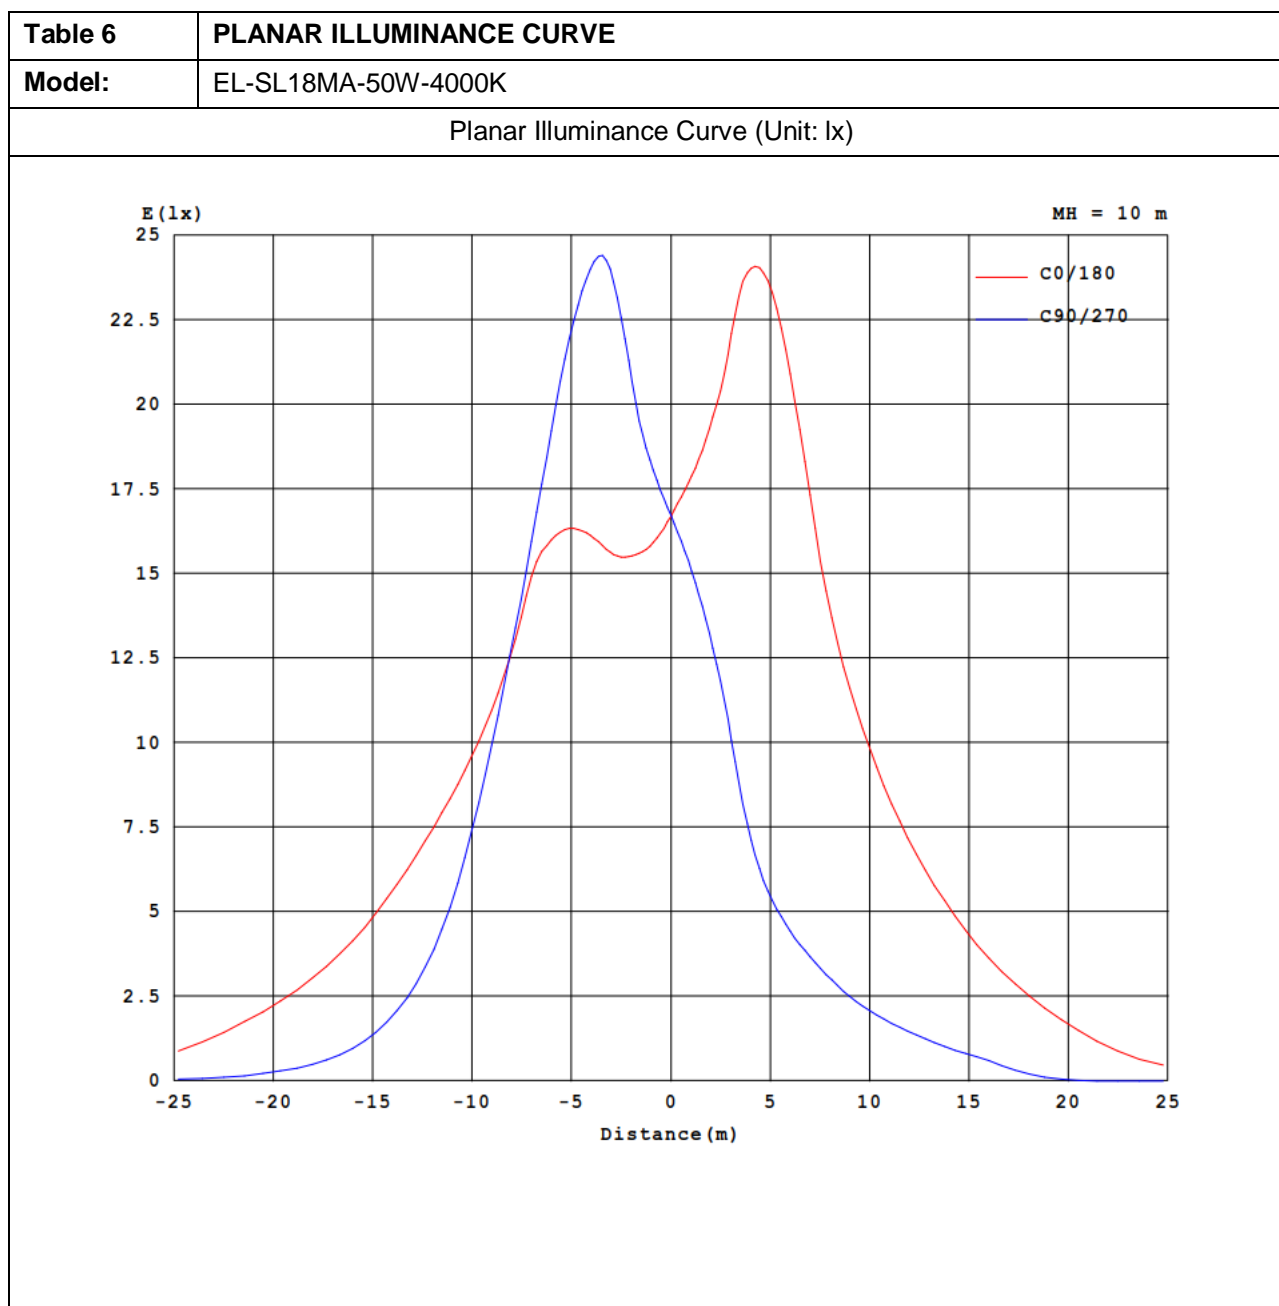



Table 4a		LUMINOUS DISTRIBUTION INTENSITY DATA (unit: cd)							
Model:		EL-SL18MA-50W-4000K							
y \ C		0	15	30	45	60	75	90	105
0		1670.96	1670.96	1670.96	1670.96	1670.96	1670.96	1670.96	1670.96
5		1825.81	1848.53	1859.38	1858.65	1845.82	1822.98	1788.84	1747.18
10		2098.25	2149.63	2167.81	2162.68	2131.66	2074.82	1985.21	1876.49
15		2568.01	2655.93	2692.03	2678.72	2628.10	2509.50	2319.88	2088.72
20		2937.02	3076.30	3227.52	3387.38	3393.85	3191.54	2852.17	2405.89
25		3079.30	3334.68	3663.86	3923.45	3981.62	3689.98	3212.19	2584.20
30		3074.09	3430.38	3840.24	4216.50	4270.18	3945.79	3331.16	2552.69
35		2901.93	3233.09	3746.40	4256.49	4199.85	3747.45	3155.13	2376.48
40		2598.22	2872.83	3529.38	4087.12	3933.94	3416.40	2881.82	2182.82
45		2097.65	2349.90	3173.38	3790.19	3826.09	3414.12	2786.80	2001.09
50		1469.47	1656.69	2553.95	3548.77	3837.42	3450.65	2709.51	1774.06
55		926.05	969.95	1582.65	2969.33	3803.17	3467.78	2596.06	1485.70
60		509.38	469.39	669.81	1853.60	3392.13	3266.50	2305.77	1124.32
65		224.15	210.91	217.66	732.89	2424.65	2417.69	1562.80	680.97
70		114.72	105.95	128.93	202.73	865.64	935.27	518.57	246.96
75		83.90	63.93	78.13	120.18	282.56	269.48	145.40	113.32
80		32.80	30.84	30.98	48.26	96.57	73.50	32.22	19.95
85		0.60	0.61	1.18	3.60	3.39	2.79	1.45	1.22
90		0	0	0	0	0	0	0	0
95		0	0	0	0	0	0	0	0
100		0	0	0	0	0	0	0	0
105		0	0	0	0	0	0	0	0
110		0	0	0	0	0	0	0	0
115		0	0	0	0	0	0	0	0
120		0	0	0	0	0	0	0	0
125		0	0	0	0	0	0	0	0
130		0	0	0	0	0	0	0	0
135		0	0	0	0	0	0	0	0
140		0	0	0	0	0	0	0	0
145		0	0	0	0	0	0	0	0
150		0	0	0	0	0	0	0	0
155		0	0	0	0	0	0	0	0
160		0	0	0	0	0	0	0	0
165		0	0	0	0	0	0	0	0
170		0	0	0	0	0	0	0	0
175		0	0	0	0	0	0	0	0
180		0	0	0	0	0	0	0	0

Table 4b		LUMINOUS DISTRIBUTION INTENSITY DATA (unit: cd)							
Model:		EL-SL18MA-50W-4000K							
y \ C		120	135	150	165	180	195	210	225
0		1670.96	1670.96	1670.96	1670.96	1670.96	1670.96	1670.96	1670.96
5		1700.80	1657.45	1614.01	1580.69	1555.33	1538.74	1533.34	1541.77
10		1758.28	1652.58	1552.89	1478.14	1428.47	1404.45	1412.75	1448.20
15		1843.24	1621.90	1438.27	1316.35	1249.98	1234.69	1276.46	1370.46
20		1880.06	1468.40	1207.79	1053.76	985.98	981.91	1056.45	1220.16
25		1871.60	1285.10	983.14	850.73	797.62	796.10	864.57	1039.86
30		1802.80	1178.70	874.68	755.57	715.44	715.56	775.58	926.92
35		1689.82	1135.40	836.53	711.84	669.77	673.17	736.43	886.38
40		1557.90	1089.89	816.48	676.71	628.68	638.12	707.18	870.13
45		1388.05	1012.96	780.24	643.43	590.68	600.27	679.00	854.25
50		1184.71	899.00	713.65	604.39	558.30	568.82	644.16	822.10
55		960.74	752.74	616.94	527.74	490.53	509.56	590.26	752.20
60		725.49	584.16	490.60	403.04	261.64	405.26	502.17	634.93
65		490.03	417.51	337.95	126.86	21.51	149.10	381.67	493.76
70		238.07	231.98	149.35	42.67	9.53	46.36	204.15	335.14
75		101.41	75.37	28.99	6.77	0.71	11.05	50.49	125.85
80		18.47	7.32	0.82	0.40	0.47	0.32	2.17	28.95
85		0.92	1.05	0.20	0.12	0.24	0.24	0.46	0.47
90		0	0	0	0	0	0	0	0
95		0	0	0	0	0	0	0	0
100		0	0	0	0	0	0	0	0
105		0	0	0	0	0	0	0	0
110		0	0	0	0	0	0	0	0
115		0	0	0	0	0	0	0	0
120		0	0	0	0	0	0	0	0
125		0	0	0	0	0	0	0	0
130		0	0	0	0	0	0	0	0
135		0	0	0	0	0	0	0	0
140		0	0	0	0	0	0	0	0
145		0	0	0	0	0	0	0	0
150		0	0	0	0	0	0	0	0
155		0	0	0	0	0	0	0	0
160		0	0	0	0	0	0	0	0
165		0	0	0	0	0	0	0	0
170		0	0	0	0	0	0	0	0
175		0	0	0	0	0	0	0	0
180		0	0	0	0	0	0	0	0


Table 4c		LUMINOUS DISTRIBUTION INTENSITY DATA (unit: cd)							
Model:		EL-SL18MA-50W-4000K							
y \ C		240	255	270	285	300	315	330	345
0		1670.96	1670.96	1670.96	1670.96	1670.96	1670.96	1670.96	1670.96
5		1558.20	1579.62	1611.40	1644.84	1680.80	1718.54	1758.55	1794.38
10		1498.51	1560.35	1630.49	1697.16	1765.68	1842.72	1933.21	2022.20
15		1482.94	1597.47	1723.87	1835.06	1956.59	2107.28	2272.03	2427.49
20		1454.58	1704.28	1921.48	2099.94	2292.23	2468.26	2639.49	2790.92
25		1359.78	1781.91	2191.74	2552.37	2760.50	2774.42	2852.61	2931.95
30		1270.00	1826.06	2485.85	2976.78	3118.15	3001.07	2916.69	2919.41
35		1235.14	1871.64	2715.75	3250.21	3464.16	3248.51	2901.14	2807.53
40		1238.37	1876.43	2666.12	3270.86	3703.46	3343.40	2832.53	2624.69
45		1223.63	1879.92	2723.60	3370.69	3746.84	3382.33	2669.50	2221.19
50		1153.26	1812.19	2833.37	3595.51	3857.11	3240.24	2244.67	1627.64
55		1022.74	1644.46	2860.73	3713.57	3889.15	2760.55	1504.57	1021.26
60		835.04	1352.81	2725.90	3638.49	3625.87	1791.93	727.72	538.23
65		612.04	956.73	2337.15	3270.25	2652.78	725.16	285.27	245.75
70		367.69	433.83	1218.33	2052.60	1295.64	169.85	138.90	120.84
75		156.21	181.80	368.98	714.95	429.15	120.65	84.50	81.68
80		45.98	68.74	117.16	237.65	157.91	56.97	36.87	39.50
85		1.06	2.33	6.02	44.15	25.63	10.78	3.48	1.05
90		0	0	0	0	0	0	0	0
95		0	0	0	0	0	0	0	0
100		0	0	0	0	0	0	0	0
105		0	0	0	0	0	0	0	0
110		0	0	0	0	0	0	0	0
115		0	0	0	0	0	0	0	0
120		0	0	0	0	0	0	0	0
125		0	0	0	0	0	0	0	0
130		0	0	0	0	0	0	0	0
135		0	0	0	0	0	0	0	0
140		0	0	0	0	0	0	0	0
145		0	0	0	0	0	0	0	0
150		0	0	0	0	0	0	0	0
155		0	0	0	0	0	0	0	0
160		0	0	0	0	0	0	0	0
165		0	0	0	0	0	0	0	0
170		0	0	0	0	0	0	0	0
175		0	0	0	0	0	0	0	0
180		0	0	0	0	0	0	0	0

Table 5		ZONAL FLUX DIAGRAM										
Model:		EL-SL18MA-50W-4000K										
$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lamp
10	1630	1843	2098	2163	1985	1653	1428	1448	0- 10	164.4	164.4	2.18
20	1921	2468	2937	3387	2852	1468	986.0	1220	10- 20	561.2	725.5	9.62
30	2486	3001	3074	4217	3331	1179	715.4	926.9	20- 30	1061	1787	23.7
40	2666	3343	2598	4087	2882	1090	628.7	870.1	30- 40	1467	3254	43.2
50	2833	3240	1469	3549	2710	899.0	558.3	822.1	40- 50	1644	4897	65
60	2726	1792	509.4	1854	2306	584.2	261.6	634.9	50- 60	1526	6423	85.2
70	1218	169.8	114.7	202.7	518.6	232.0	9.530	335.1	60- 70	892.8	7316	97
80	117.2	56.97	32.80	48.26	32.22	7.318	0.4722	28.95	70- 80	190.4	7506	99.6
90	1.051	0.7812	0.2373	0.5088	1.245	0.5088	0.1660	0.5323	80- 90	13.53	7520	99.7
100	0	0	0	0	0	0	0	0	90-100	0	7520	100.0
110	0	0	0	0	0	0	0	0	100-110	0	7520	100.0
120	0	0	0	0	0	0	0	0	110-120	0	7520	100.0
130	0	0	0	0	0	0	0	0	120-130	0	7520	100.0
140	0	0	0	0	0	0	0	0	130-140	0	7520	100.0
150	0	0	0	0	0	0	0	0	140-150	0	7520	100.0
160	0	0	0	0	0	0	0	0	150-160	0	7520	100.0
170	0	0	0	0	0	0	0	0	160-170	0	7520	100.0
180	0	0	0	0	0	0	0	0	170-180	0	7520	100.0
DEG	LUMINOUS INTENSITY:cd Less than 25% Percent = 7.0 %								UNIT:lm			



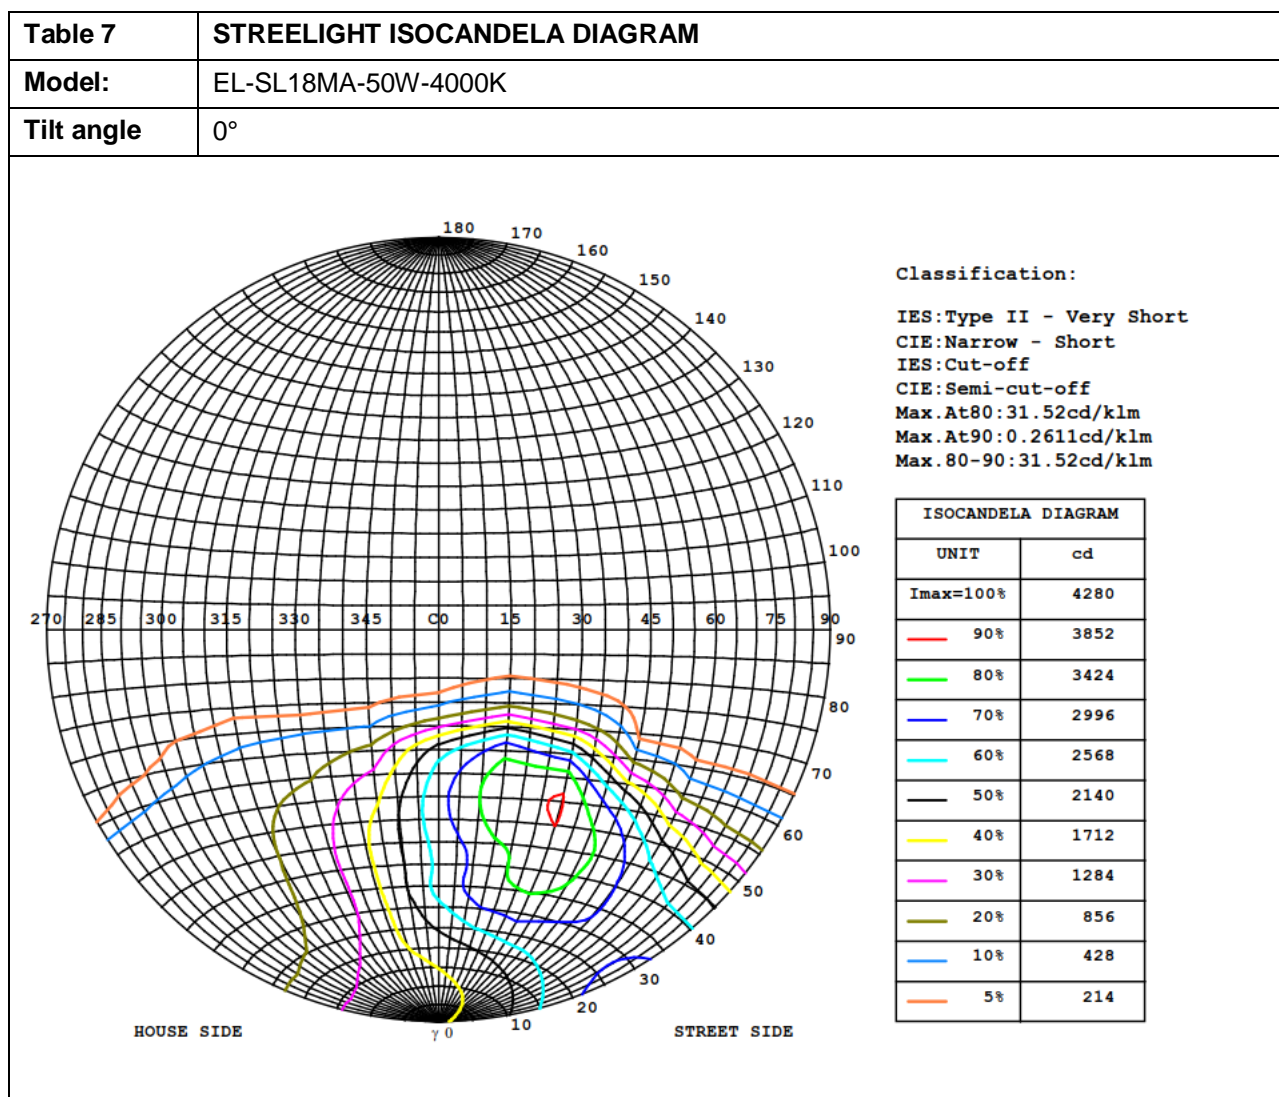



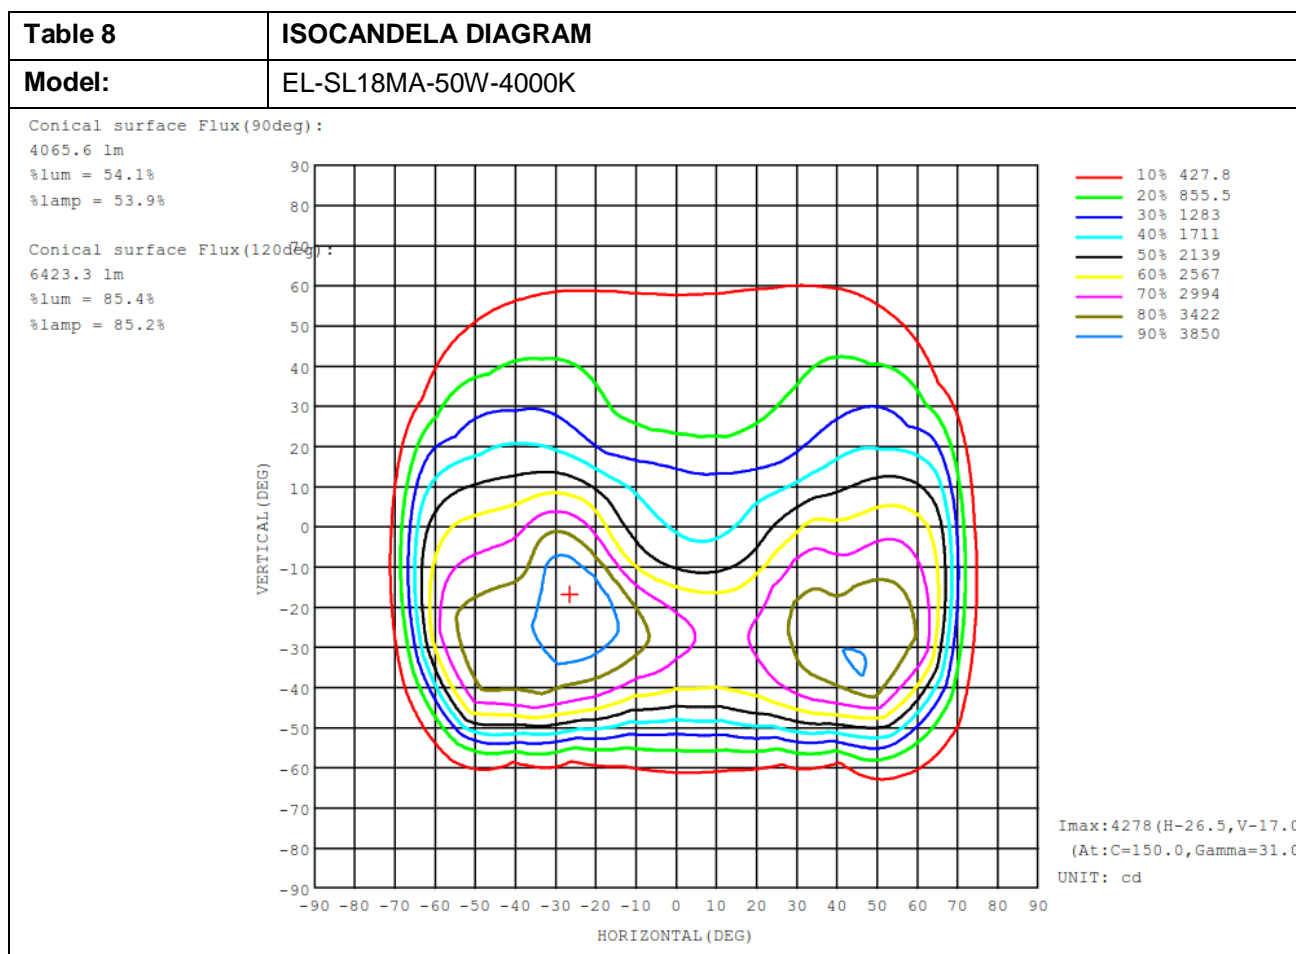

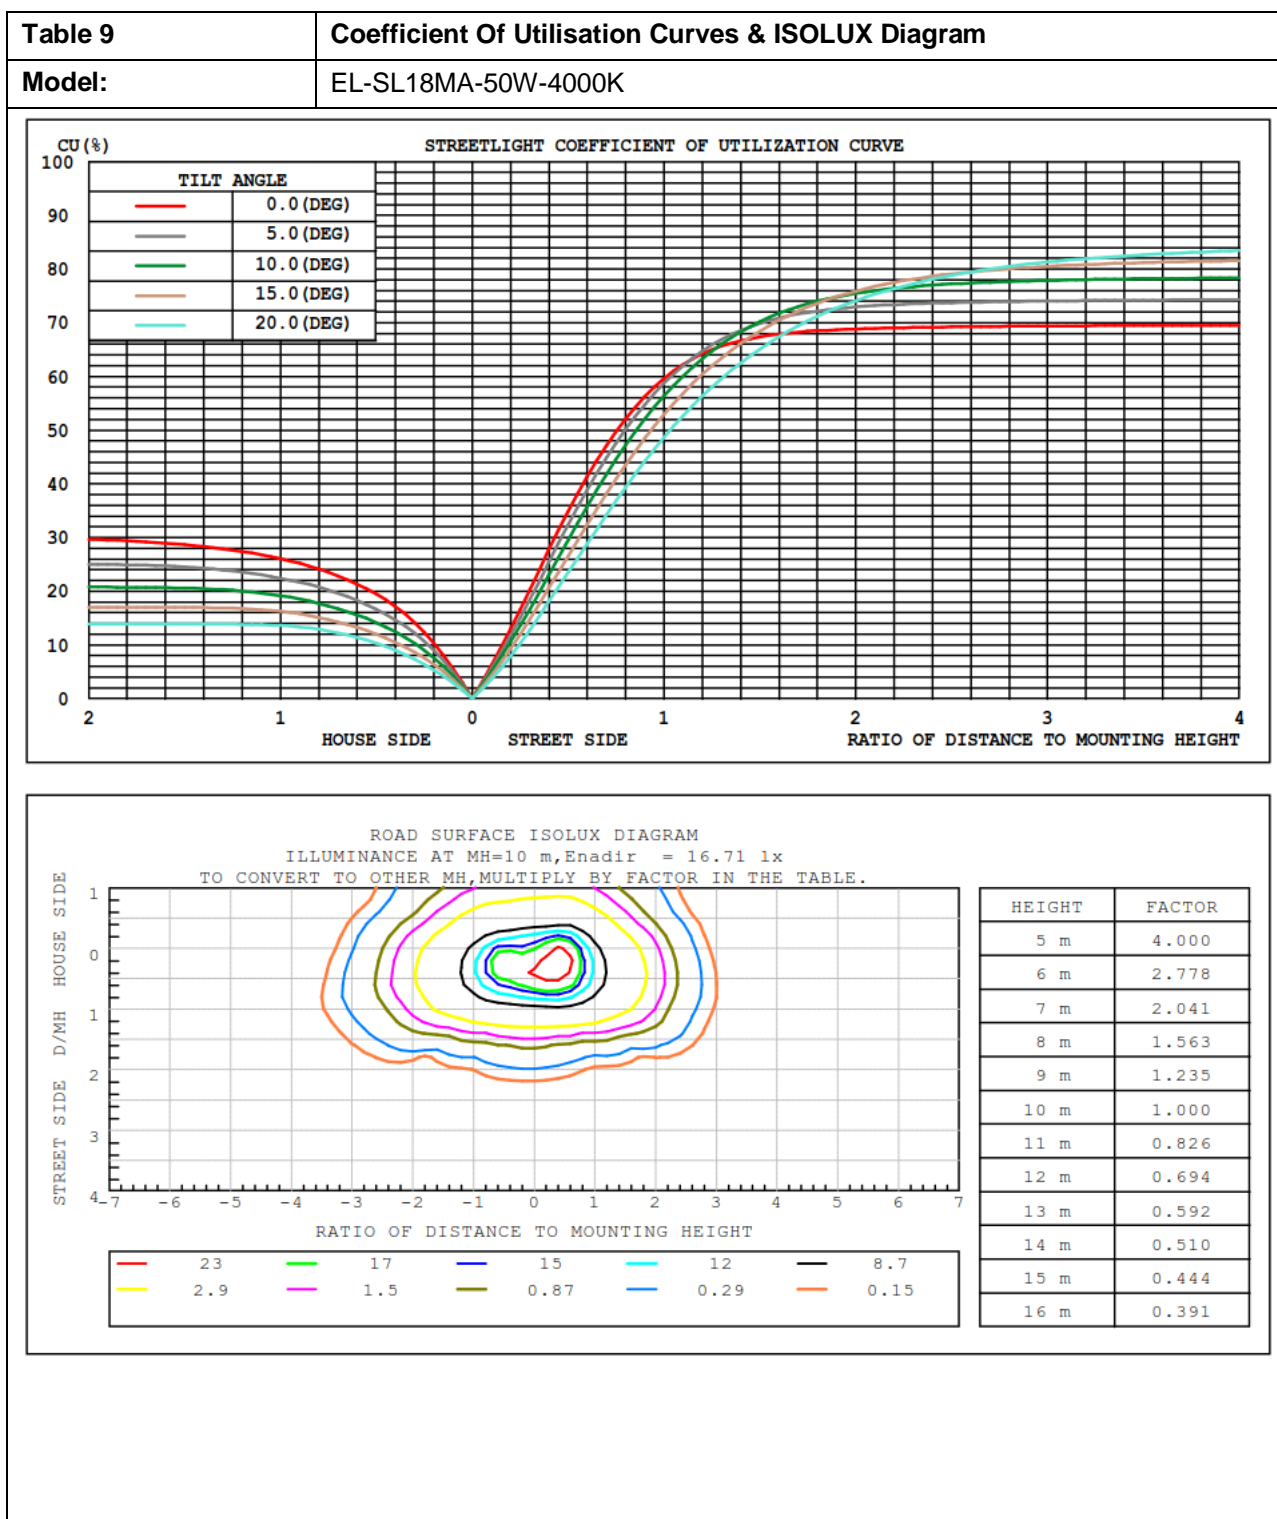


Table 10	LCS
Model:	EL-SL18MA-50W-4000K

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	1153.3	15.3
FM - Front-Medium(30-60)	3316	44.1
FH - Front-High(60-80)	775.55	10.3
FVH - Front-Very High(80-90)	11.65	0.2
Total Forward Light	5256.5	69.9

BL - Back-Low(0-30)	633.68	8.4
BM - Back-Medium(30-60)	1320.3	17.6
BH - Back-High(60-80)	307.61	4.1
BVH - Back-Very High(80-90)	1.8835	0.0
Total Back Light	2263.5	30.1

UL - Uplight-Low(90-100)	0	0.0
UH - Uplight-High(100-180)	0	0.0
Total Up Light	0	0.0

BUG(Back,Up,Glare) Rating	B2-U0-G1
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	5256.5	0	5256.5
Street Side	2263.5	0	2263.5

#### Attachment 1: Equipment List

No.	Type	Manufacture	Model	Equipment ID	Next Calibration
1	Full-field Speed Goniophotometer	Everfine	GO-R5000	S1207714-YQ	May. 18.2019
2	High-accuracy Digital Photometer Head	Everfine	ID-1000_P-B/ID-1000_P-C	S1207714a-YQ	May. 18.2019
3	High-accuracy Digital Photometer Head	Everfine	ID-1000_P-B/ID-1000_P-C	S1207714b-YQ	May. 18.2019
4	High Accuracy Array Spectroradio Meter	Labsphere	CDS-600	S1312826-YQ	May. 18.2019
5	Standard Light Source	Everfine	D908	S1207714d-YQ	May. 18.2019
6	Digital Power Meter	Yokogawa	WT310	S1310805-YQ	May. 18.2019
7	Digital CC & CV DC Power Supply	Everfine	WY12010	S1207714f-YQ	May. 18.2019
8	Intelligent AC Power Source	Everfine	DPS1060	S1207714g-YQ	May. 18.2019
10	DC Power Supply	Everfine	WY3010	S1108624-YQ	May. 18.2019
11	Flux Reference Lamp	Labsphere	SCL-1400	S1602991-YQ	May. 18.2019
12	luminance Source	Everfine	SLS-150	S1108626-YQ	May. 18.2019
13	Thermometer	Fluke	Fluke 52-II	S0712414-YQ	May. 18.2019

-- END OF TEST REPORT --