

	Test Report issued under the responsibility of:	
NCB TÜV SÜD PSB Pte Ltd. 1 Science Park Drive, 118221 Singapore Singapore		
<p style="text-align: center;"> TEST REPORT IEC 60598-2-3 Luminaires Part 2: Particular requirements Section 3: Luminaires for road and street lighting </p>		
Report Number. : 083-1810808-300 Date of issue : 2020-06-08 Total number of pages : 164		
Name of Testing Laboratory preparing the Report : TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch Applicant's name : Everlite LED Lighting Co., Limited Address : Room 2105, Trend Centre, 29-31, Cheung Lee Street Chaiwan HONG KONG		
Test specification: Standard : IEC 60598-2-3:2002, AMD1:2011 used in conjunction with IEC 60598-1:2014, AMD1:2017 Test procedure : CB Scheme Non-standard test method : N/A		
Test Report Form No. : IEC60598_2_3L Test Report Form(s) Originator : Intertek Semko AB Master TRF : Dated 2018-03-09		
<p> Copyright © 2018 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed. This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02. </p>		
General disclaimer: The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.		

Test item description..... :	LED luminaires for road and street lighting (LED street light)
Trade Mark..... :	N/A
Manufacturer..... :	Same as applicant
Model/Type reference..... :	Details see “General product information”
Ratings..... :	220-240V~; 50/60 Hz; ta: 50°C; Class I; IP66; IK10; Others see “General product information”

Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
<input checked="" type="checkbox"/>	CB Testing Laboratory:	TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch No.151 Heng Tong Road. Shanghai 200070 P.R. China
Testing location/ address.....:		No. 1999, Duhui Road, Shanghai, 201108, P. R. China
Tested by (name, function, signature).....:		Project handler Lichen WANG
Approved by (name, function, signature)....:		Designated reviewer Xudong ZANG
		
<input type="checkbox"/>	Testing procedure: CTF Stage 1:	N/A
Testing location/ address.....:		N/A
Tested by (name, function, signature).....:		N/A
Approved by (name, function, signature)....:		N/A
<input type="checkbox"/>	Testing procedure: CTF Stage 2:	N/A
Testing location/ address.....:		N/A
Tested by (name + signature)		N/A
Witnessed by (name, function, signature)..:		N/A
Approved by (name, function, signature)....:		N/A
<input type="checkbox"/>	Testing procedure: CTF Stage 3:	N/A
<input type="checkbox"/>	Testing procedure: CTF Stage 4:	N/A
Testing location/ address.....:		N/A
Tested by (name, function, signature).....:		N/A
Witnessed by (name, function, signature)..:		N/A
Approved by (name, function, signature)....:		N/A
Supervised by (name, function, signature) :		N/A

List of Attachments (including a total number of pages in each attachment):

Additional requirements of IEC 62031:2018 for 083-1810808-300 attachment 1.

Summary of testing:

The sample's mentioned in this report is/are submitted/ supplied/ manufactured by client. The laboratory therefore assumes no responsibility for accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.

Tests performed (name of test and test clause):

Complete tests were performed on model EL-SL09(4)-280, EL-SL18LA-160, EL-SL18LB-120, EL-SL18MB-20, EL-SL08(2)-120, EL-SL68(S)-50, EL-SL68(L)-200, EL-SL68(L)-240, EL-SL68(Mini)-40 and EL-SL68(M)-150.

Model EL-SL11(M)-100, EL-SL20A(L)-100, EL-GL01-80, EL-SL58-80, EL-SL68(MINI)-30, EL-SL68(MINI)-50, EL-SL68(S)-80, EL-SL68(S)-100 and EL-SL68(M)-120 were performed IP66 and thermal tests.

Model EL-SL18MA-30 was performed thermal tests. Model EL-GL01-100 and EL-SL58-120 were performed the static load test.

All type of LEDs within the luminaires were performed the related tests according IEC 62031, IEC/TR 62778 and IEC 62471.

Construction check was performed for all models.

All models comply with the safety requirement.

Testing location:

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch
No. 1999, Duhui Road, Shanghai, 201108, P. R. China

Summary of compliance with National Differences:

N/A

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

EL-SL11(Mini)-20
220-240V~; 50/60 Hz; 20W
ta: 50°C;

IP66

Everlite LED Lighting Co., Limited
Room 2105, Trend Centre, 29-31, Cheung Lee Street
Chaiwan HONG KONG



Caution, risk of electric shock

Note 1: Height of letter and numeral not less than 2mm, graphical symbol not less than 5mm, risk of electric shock symbol not less than 15mm.

Note 2: Label for other models are the same except for model name and technical parameter.

Test item particulars	LED luminaires for road and street lighting (LED street light)
Classification of installation and use.....	Fixed luminaires; normal use
Supply Connection	Supply cord
Possible test case verdicts:	
- test case does not apply to the test object.....	N/A
- test object does meet the requirement.....	P (Pass)
- test object does not meet the requirement.....	F (Fail)
Testing	
Date of receipt of test item.....	2020-01-02
Date (s) of performance of tests	2020-01-02 to 2020-06-08
General remarks:	
<p>"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.</p> <p>Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.</p> <p>Clause numbers between brackets refer to clauses in IEC 60598-1</p> <p>Remark 1: This test report replaces the previous version 083-1810808-200, issued on 2019-08-02 due to the modifications mentioned as below: 1) Added model name and LED driver</p> <p>Remark 2: The following contents are included and as appendix of this test report: 1) Test report IEC 60598-2-3:2002 + A1:2011 used in conjunction with IEC 60598-1:2014+A1:2017 2) Appendix 1: Additional requirements of IEC 62493: 2015 3) Appendix 2: Additional requirements of IEC/TR 62778:2014 4) Appendix 3: Additional requirements of IEC 62471:2006 5) Appendix 4: Photographs</p>	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60598-1:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided.....	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> Not applicable
When differences exist; they shall be identified in the General product information section.	

Name and address of factory (ies)..... : 1. Ningbo Skyzon Energy Co.,Ltd. No.19,KeSan Road, 315600 Ninghai, Ningbo PEOPLE'S REPUBLIC OF CHINA 2. Ningbo Shishang Photoelectricity Technology Co.,Limited No.19, KeSan Road Ninghai 315600 Ningbo PEOPLE'S REPUBLIC OF CHINA				
General product information: All products covered in this test report were LED street light for outdoor use. All the products have similar construction, just with different LED modules, different LED controlgear and appearance. The mounting height was 5m-12m. Model list:				
Model	Rated power (W)	LED controlgear 1	LED controlgear 2	LED type
EL-SL11(Mini)-20	20	HLG-40H-36A/48A	EUC-026S070SVM EUC-026S050SVM	SMD
EL-SL11(Mini)-30	30	HLG-40H-36A/42A	EUC-036S105SV EUC-035S070SVM EUC-035S105SVM	SMD
EL-SL11(Mini)-40	40	HLG-40H-36A/42A	EUC-052S140SV EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM	SMD
EL-SL11(S)-50	50	HLG-60H-36A/42A ELG-075-36A/42A	EUC-052S140SV EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM EUK-075S280DV/TV EUD-075S070DV/BV	SMD
EL-SL11(S)-60	60	HLG-60H-36A/42A ELG-075-36A/42A	EBD-075S250DV EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM EUK-075S280DV/TV EUD-075S070DV/BV	SMD
EL-SL11(S)-70	70	HLG-80H-36A/42A ELG-075-36A/42A	EBD-075S250DV EUK-075S280DV/TV EUD-075S070DV/BV	SMD
EL-SL11(S)-80	80	HLG-80H-36A/42A ELG-075-36A/42A	EBD-075S250DV EUK-075S280DV/TV EUD-075S070DV/BV	SMD
EL-SL11(M)-90	90	HLG-100H-36A/42A ELG-100-36A/42A	EBD-100S280DV EUK-096S350DV/TV EUD-096S070DVA/BVA	SMD
EL-SL11(M)-100	100	HLG-100H-36A/42A ELG-100-36A/42A	EBD-100S280DV EUK-096S350DV/TV EUD-096S070DVA/BVA	SMD
EL-SL11(M)-120	120	HLG-120H-36A/42A ELG-150-36A/42A	EBD-150S420DVA EUK-150S560DV/TV EUD-150S105DVA/BVA	SMD
EL-SL11(L)-150	150	HLG-150H-36A/42A ELG-150-36A/42A	EBD-150S420DVA EUK-150S560DV/TV EUD-150S105DVA/BVA	SMD
EL-SL11(L)-160	160	HLG-150H-36A/42A ELG-150-36A/42A	EBD-150S420DVA EUK-150S560DV/TV EUD-150S105DVA/BVA	SMD
EL-SL11(L)-180	180	HLG-185H-36A/42A	EBD-200S560DV	SMD

		ELG-200-36A/42A	EUK-200S560DV/TV EUD-200S105DVA/BVA	
EL-SL11(L)-200	200	HLG-240H-36A/42A ELG-200-36A/42A	EBD-200S560DV EUK-200S560DV/TV EUD-200S105DVA/BVA	SMD
EL-SL11(L)-220	220	HLG-240H-36A/42A ELG-240-36A/42A	EBD-240S560DV EUK-240S670DV/TV EUD-240S105DVA/BVA	SMD
EL-SL11(L)-240	240	HLG-240H-36A/42A ELG-240-36A/42A	EBD-240S560DV EUK-240S670DV/TV EUD-240S105DVA/BVA	SMD
EL-SL68(Mini)-20	20	HLG-40H-36A/48A	EUC-026S070SVM EUC-026S050SVM	SMD
EL-SL68(Mini)-30	30	HLG-40H-36A/42A	EUC-036S105SV EUC-035S070SVM EUC-035S105SVM	SMD
EL-SL68(Mini)-40	40	HLG-40H-36A/42A	EUC-052S140SV EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM	SMD
EL-SL68(S)-40	40	HLG-40H-36A/42A ELG-075-36A/42A	EUC-052S140SV EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM EUK-075S280DV/TV EUD-075S070DV/BV	SMD
EL-SL68(S)-50	50	HLG-60H-36A/42A ELG-075-36A/42A	EUC-052S140SV EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM EUK-075S280DV/TV EUD-075S070DV/BV	SMD
EL-SL68(S)-60	60	HLG-60H-36A/42A ELG-075-36A/42A	EBD-075S250DV EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM EUK-075S280DV/TV EUD-075S070DV/BV	SMD
EL-SL68(S)-70	70	HLG-80H-36A/42A ELG-075-36A/42A	EBD-075S250DV EUK-075S280DV/TV EUD-075S070DV/BV	SMD
EL-SL68(S)-80	80	HLG-80H-36A/42A ELG-075-36A/42A	EBD-075S250DV EUK-075S280DV/TV EUD-075S070DV/BV	SMD
EL-SL68(M)-90	90	HLG-100H-36A/42A ELG-100-36A/42	EBD-100S280DV EUK-096S350DV/TV EUD-096S070DVA/BVA	SMD
EL-SL68(M)-100	100	HLG-100H-36A/42A ELG-100-36A/42A	EBD-100S280DV EUK-096S350DV/TV EUD-096S070DVA/BVA	SMD
EL-SL68(M)-120	120	HLG-120H-36A/42A ELG-150-36A/42A	EBD-150S420DVA EUK-150S560DV/TV EUD-150S105DVA/BVA	SMD
EL-SL68(L)-150	150	HLG-150H-36A/42A ELG-150-36A/42A	EBD-150S420DVA EUK-150S560DV/TV EUD-150S105DVA/BVA	SMD
EL-SL68(L)-160	160	HLG-150H-36A/42A	EBD-150S420DVA	SMD

		ELG-150-36A/42A	EUK-150S560DV/TV EUD-150S105DVA/BVA	
EL-SL68(L)-180	180	HLG-185H-36A/42A ELG-200-36A/42A	EBD-200S560DV EUK-200S560DV/TV EUD-200S105DVA/BVA	SMD
EL-SL68(L)-200	200	HLG-240H-36A/42A ELG-200-36A/42A	EBD-200S560DV EUK-200S560DV/TV EUD-200S105DVA/BVA	SMD
EL-SL68(L)-220	220	HLG-240H-36A/42A ELG-240-36A/42A	EBD-240S560DV EUK-240S670DV/TV EUD-240S105DVA/BVA	SMD
EL-SL68(L)-240	240	HLG-240H-36A/42A ELG-240-36A/42A	EBD-240S560DV EUK-240S670DV/TV EUD-240S105DVA/BVA	SMD
EL-SL20(S)-20	20	HLG-40H-36A/42A	EUC-026S070SVM EUC-026S050SVM	SMD
EL-SL20(S)-30	30	HLG-40H-36A/42A	EUC-036S105SV EUC-035S070SVM EUC-035S105SVM	SMD
EL-SL20(S)-40	40	HLG-40H-36A/42A	EUC-052S140SV EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM	SMD
EL-SL20(M)-60	60	HLG-60H-36A/42A ELG-075-36A/42A	EBD-075S250DV EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM EUK-075S280DV/TV EUD-075S070DV/BV	SMD
EL-SL20(M)-80	80	HLG-80H-36A/42A ELG-075-36A/42A	EBD-075S250DV EUK-075S280DV/TV EUD-075S070DV/BV	SMD
EL-SL20(M)-90	90	HLG-100H-36A/42A ELG-100-36A/42A	EBD-100S280DV EUK-096S350DV/TV EUD-096S070DVA/BVA	SMD
EL-SL20(L)-100	100	HLG-100H-36A/42A ELG-100-36A/42A	EBD-100S280DV EUK-096S350DV/TV EUD-096S070DVA/BVA	SMD
EL-SL20(L)-120	120	HLG-120H-36A/42A ELG-150-36A/42A	EBD-150S420DVA EUK-150S560DV/TV EUD-150S105DVA/BVA	SMD
EL-SL20(L)-150	150	HLG-185H-36A/42A ELG-150-36A/42A	EBD-150S420DVA EUK-150S560DV/TV EUD-150S105DVA/BVA	SMD
EL-SL20(L)-160	160	HLG-185H-36A/42A ELG-150-36A/42A	EBD-150S420DVA EUK-150S560DV/TV EUD-150S105DVA/BVA	SMD
EL-SL20(L)-180	180	HLG-185H-36A/42A ELG-200-36A/42A	EBD-200S560DV EUK-200S560DV/TV EUD-200S105DVA/BVA	SMD
EL-SL08(1S)-20	20	HLG-40H-48A	EUC-026S070SVM EUC-026S050SVM	COB
EL-SL08(1S)-30	30	HLG-40H-36A	EUC-036S105SV EUC-035S070SVM EUC-035S105SVM	COB
EL-SL08(1S)-40	40	HLG-40H-36A	EUC-052S105SV EUC-060S070SVM	COB

			EUC-060S105SVM EUC-060S180SVM	
EL-SL08(1S)-50	50	HLG-60H-36A/54A ELG-075-36A/54A	EUC-052S140SV EUC-060S105SVM EUC-060S180SVM EUK-075S175DV/TV	COB
EL-SL08(1L)-60	60	HLG-60H-36A/54A ELG-075-36A/54A	EBD-075S250DV EUC-060S105SVM EUC-060S180SVM EUK-075S175DV/TV	COB
EL-SL08(1L)-70	70	HLG-80H-36A/54A ELG-075-36A/54A	EBD-075S250DV EUK-075S280DV/TV EUK-075S175DV/TV	COB
EL-SL08(1L)-80	80	HLG-80H-36A/54A ELG-075-36A/54A	EBD-075S250DV EUK-075S280DV/TV EUK-075S175DV/TV	COB
EL-SL08(2)-90	90	HLG-100H-36A/54A ELG-100-36A/54A	EBD-100S280DV EUK-096S350DV/TV EUK-096S210DV/TV	COB
EL-SL08(2)-100	100	HLG-100H-36A/54A ELG-100-36A/54A	EBD-100S280DV EUK-096S350DV/TV EUK-096S210DV/TV	COB
EL-SL08(2)-120	120	HLG-120H-36A/54A ELG-150-36A/54A	EBD-150S420DVA EUK-150S560DV/TV EUK-150S350DV/TV	COB
EL-SL08(2)-150	150	HLG-150H-36A/54A ELG-150-36A/54A	EBD-150S420DVA EUK-150S560DV/TV EUK-150S350DV/TV	COB
EL-SL08(3)-150	150	HLG-150H-36A/54A ELG-150-36A/54A	EBD-150S420DVA EUK-150S560DV/TV EUK-150S350DV/TV	COB
EL-SL08(3)-180	180	HLG-185H-36A/54A ELG-200-36A/54A	EBD-200S560DV EUK-200S560DV/TV EUK-200S350DV/TV	COB
EL-SL08(3)-200	200	HLG-240H-36A/54A ELG-200-36A/54A	EBD-200S560DV EUK-200S560DV/TV EUK-200S350DV/TV	COB
EL-SL09(1S)-30	30	HLG-40H-36A	EUC-036S105SV EUC-035S070SVM EUC-035S105SVM	COB
EL-SL09(1L)-50	50	HLG-60H-36A ELG-075-36A/54A	EUC-052S140SV EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM	COB
EL-SL09(1L)-60	60	HLG-60H-36A/54A ELG-075-36A/54A	EBD-075S250DV EUC-060S105SVM EUC-060S180SVM EUK-075S175DV/TV	COB
EL-SL09(1L)-80	80	HLG-80H-36A/54A ELG-075-36A/54A	EBD-075S250DV EUK-075S280DV/TV EUK-075S175DV/TV	COB
EL-SL09(2)-100	100	HLG-100H-36A/54A ELG-100-36A/54A	EBD-100S280DV EUK-096S350DV/TV EUK-096S210DV/TV	COB
EL-SL09(2)-120	120	HLG-120H-36A/54A ELG-150-36A/54A	EBD-150S420DVA EUK-150S560DV/TV EUK-150S350DV/TV	COB
EL-SL09(3)-120	120	HLG-150H-36A/54A	EBD-150S420DVA	COB

		ELG-150-36A/54A	EUK-150S560DV/TV EUK-150S350DV/TV	
EL-SL09(3)-150	150	HLG-150H-36A/54A ELG-150-36A/54A	EBD-150S420DVA EUK-150S560DV/TV EUK-150S350DV/TV	COB
EL-SL09(3)-180	180	HLG-185H-36A/54A ELG-200-36A/54A	EBD-200S560DV EUK-200S560DV/TV EUK-200S350DV/TV	COB
EL-SL09(4)-200	200	HLG-240H-36A/54A ELG-200-36A/54A	EBD-200S560DV EUK-200S560DV/TV EUK-200S350DV/TV	COB
EL-SL09(4)-240	240	HLG-240H-36A/54A ELG-240-36A/54A	EBD-240S660DV EUK-240S670DV/TV EUK-240S420DV/TV	COB
EL-SL09(4)-280	280	HLG-150H-36A/54AX2 ELG-150-36A/54AX2	EBD-150S420DVAX2 EUK-150S560DV/TV EUK-150S350DV/TV	COB
EL-SL10(1)-30	30	HLG-40H-36A/42A	EUC-036S105SV EUC-035S070SVM EUC-035S105SVM	COB
EL-SL10(1)-40	40	HLG-40H-36A/42A	EUC-052S105SV EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM	COB
EL-SL10(1)-50	50	HLG-60H-36A/54A ELG-075-36A/54A	EUC-052S140SV EUC-060S105SVM EUC-060S180SVM EUK-075S175DV/TV	COB
EL-SL10(1)-60	60	HLG-60H-36A/54A ELG-075-36A/54A	EBD-075S250DV EUC-060S105SVM EUC-060S180SVM EUK-075S175DV/TV	COB
EL-SL10(1)-70	70	HLG-80H-36A/54A ELG-075-36A/54A	EBD-075S250DV EUK-075S280DV/TV EUK-075S175DV/TV	COB
EL-SL10(1)-80	80	HLG-80H-36A/54A ELG-075-36A/54A	EBD-075S250DV EUK-075S280DV/TV EUK-075S175DV/TV	COB
EL-SL10(2)-90	90	HLG-100H-36A/54A ELG-100-36A/54A	EBD-100S280DV EUK-096S350DV/TV EUK-096S210DV/TV	COB
EL-SL10(2)-100	100	HLG-100H-36A/54A ELG-100-36A/54A	EBD-100S280DV EUK-096S350DV/TV EUK-096S210DV/TV	COB
EL-SL10(2)-120	120	HLG-120H-36A/54A ELG-150-36A/54A	EBD-150S420DVA EUK-150S560DV/TV EUK-150S350DV/TV	COB
EL-SL10(3)-150	150	HLG-150H-36A/54A ELG-150-36A/54A	EBD-150S420DVA EUK-150S560DV/TV EUK-150S350DV/TV	COB
EL-SL10(3)-180	180	HLG-185H-36A/54A ELG-200-36A/54A	EBD-200S560DV EUK-200S560DV/TV EUK-200S350DV/TV	COB
EL-SL10(3)-200	200	HLG-240H-36A/54A ELG-200-36A/54A	EBD-200S560DV EUK-200S560DV/TV EUK-200S350DV/TV	COB
EL-SL18MA-20	20	HLG-40H-36A	EUC-026S070SVM EUC-026S050SVM	SMD

			EBS-040S070D TE EBS-040S070BTE	
EL-SL18MA-30	30	HLG-40H-24A	EUC-036S140SV EUC-035S070SVM EUC-035S105SVM EBS-040S070D TE EBS-040S070BTE	SMD
EL-SL18MA-40	40	HLG-40H-30A	EUC-052S140SV EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM EBS-040S070DTE EBS-040S070BTE	SMD
EL-SL18MA-50	50	HLG-60H-36A ELG-075-36A/42A	EUC-052S140SV EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM EUK-075S280DV/TV EUD-075S070DV/BV	SMD
EL-SL18MA-60	60	HLG-60H-42A ELG-075-36A/42A	EBD-075S250DV EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM EUK-075S175DV/TV EUD-075S070DV/BV	SMD
EL-SL18MA-70	70	HLG-80H-24A ELG-075-24A/42A	EBD-075S250DV EUK-075S280DV/TV EUD-075S070DV/BV	SMD
EL-SL18MA-80	80	HLG-80H-36A ELG-075-36A/42A	EBD-075S250DV EUK-075S280DV/TV EUD-075S070DV/BV	SMD
EL-SL18MA-90	90	HLG-100H-36A/42A ELG-100-36A/42	EBD-100S280DV EUK-096S350DV/TV EUD-096S070DVA/BVA	SMD
EL-SL18MB-20	20	HLG-40H-48A	EUC-026S070SVM EUC-026S050SVM	COB
EL-SL18MB-30	30	HLG-40H-36A	EUC-036S070SV EUC-035S070SVM EUC-035S105SVM	COB
EL-SL18MB-40	40	HLG-40H-36A	EUC-052S105SV EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM	COB
EL-SL18MB-50	50	HLG-60H-36A/54A ELG-075-36A/54A	EUC-052S140SV EUC-060S105SVM EUC-060S180SVM EUK-075S175DV/TV	COB
EL-SL18MB-60	60	HLG-60H-36A/54A ELG-075-36A/54A	EBD-075S250DV EUC-060S105SVM EUC-060S180SVM EUK-075S175DV/TV	COB
EL-SL18LA-90	90	HLG-100H-36A/42A ELG-100-36A/42	EBD-100S280DV EUK-096S350DV/TV EUD-096S070DVA/BVA	SMD
EL-SL18LA-100	100	HLG-100H-36A/42A ELG-100-36A/42	EBD-100S280DV EUK-096S350DV/TV EUD-096S070DVA/BVA	SMD
EL-SL18LA-120	120	HLG-120H-36A/42A	EBD-150S420DVA	SMD

		ELG-150-36A/42A	EUK-150S350DV/TV EUD-150S105DVA/BVA	
EL-SL18LA-150	150	HLG-150H-36A/42A ELG-150-36A/42A	EBD-150S420DVA EUK-150S560DV/TV EUD-150S105DVA/BVA	SMD
EL-SL18LA-160	160	HLG-150H-36A/42A ELG-150-36A/42A	EBD-150S420DVA EUK-150S560DV/TV EUD-150S105DVA/BVA	SMD
EL-SL18LB-80	80	HLG-80H-36A/54A ELG-075-36A/54A	EBD-075S250DV EUK-075S280DV/TV EUK-075S175DV/TV	COB
EL-SL18LB-90	90	HLG-100H-36A/54A ELG-100-36A/54A	EBD-100S280DV EUK-096S350DV/TV EUK-096S210DV/TV	COB
EL-SL18LB-100	100	HLG-100H-36A/54A ELG-100-36A/54A	EBD-100S280DV EUK-096S350DV/TV EUK-096S210DV/TV	COB
EL-SL18LB-120	120	HLG-120H-36A/54A ELG-150-36A/54A	EBD-150S420DVA EUK-150S560DV/TV EUK-150S350DV/TV	COB
EL-SL58(S)-20	20	HLG-40H-36A/48A	EUC-026S070SVM EUC-026S050SVM	SMD
EL-SL58(S)-30	30	HLG-40H-36A/42A	EUC-036S105SV EUC-035S070SVM EUC-035S105SVM	SMD
EL-SL58(S)-40	40	HLG-40H-36A/42A	EUC-052S140SV EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM	SMD
EL-SL58(S)-50	50	HLG-60H-36A/42A ELG-075-36A/42A	EUC-052S140SV EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM EUD-075S070DV/BV	SMD
EL-SL58(S)-60	60	HLG-60H-36A/42A ELG-075-36A/42A	EBD-075S250DV EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM EUD-075S070DV/BV	SMD
EL-SL58-30	30	HLG-40H-36A	EUC-036S105SV EUC-036S070SV EUC-035S070SVM EUC-035S105SVM	SMD
EL-SL58-40	40	HLG-40H-30A/36A	EUC-052S EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM	SMD
EL-SL58-50	50	HLG-60H-36A/42A ELG-075-36A/42A	EUC-052S140SV EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM EUK-075S280DV/TV EUD-075S070DV/BV	SMD
EL-SL58-60	60	HLG-60H-36A/42A ELG-075-36A/42A	EBD-075S250DV EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM	SMD

			EUK-075S280DV/TV EUD-075S070DV/BV	
EL-SL58-70	70	HLG-80H-36A/42A ELG-075-36A/42A	EBD-075S250DV EUK-075S280DV/TV EUD-075S070DV/BV	SMD
EL-SL58-80	80	HLG-80H-36A/42A ELG-075-36A/42A	EBD-075S250DV EUK-075S280DV/TV EUD-075S070DV/BV	SMD
EL-SL58-90	90	HLG-100H-36A/42A ELG-100-36A/42A	EBD-100S280DV EUK-096S350DV/TV EUD-096S070DVA/BVA	SMD
EL-SL58-100	100	HLG-100H-36A/42A ELG-100-36A/42A	EBD-100S280DV EUK-096S350DV/TV EUD-096S070DVA/BVA	SMD
EL-SL58-120	120	HLG-120H-36A/42A ELG-150-36A/42A	EBD-150S420DVA EUK-150S560DV/TV EUD-150S105DVA/BVA	SMD
EL-GL01-20	20	HLG-40H-54A	EUC-026S070SVM EUC-026S050SVM	SMD
EL-GL01-30	30	HLG-40H-54A	EUC-036S105SV EUC-035S070SVM EUC-035S105SVM	SMD
EL-GL01-40	40	HLG-40H-54A	EUC-052S EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM	SMD
EL-GL01-50	50	HLG-60H-36A/42A ELG-075-36A/42A	EUC-052S140SV EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM EUK-075S280DV/TV EUD-075S070DV/BV	SMD
EL-GL01-60	60	HLG-60H-36A/42A ELG-075-36A/42A	EBD-075S250DV EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM EUK-075S280DV/TV EUD-075S070DV/BV	SMD
EL-GL01-80	80	HLG-80H-36A/42A ELG-075-36A/42A	EBD-075S250DV EUK-075S280DV/TV EUD-075S070DV/BV	SMD
EL-GL01-100	100	HLG-100H-36A/42A ELG-100-36A/42A	EBD-100S280DV EUK-096S350DV/TV EUD-096S070DVA/BVA	SMD
EL-SL20A(S)-30	30	HLG-40H-24A/36A	EUC-036S105SV EUC-035S070SVM EUC-035S105SVM	SMD
EL-SL20A(S)-40	40	HLG-40H-30A/36A	EUC-052S EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM	SMD
EL-SL20A(S)-50	50	HLG-60H-36A/42A ELG-075-36A/42A	EUC-052S140SV EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM EUK-075S280DV/TV EUD-075S070DV/BV	SMD
EL-SL20A(M)-60	60	HLG-60H-36A/42A	EBD-075S250DV	SMD

		ELG-075-36A/42A	EUC-060S070SVM EUC-060S105SVM EUC-060S180SVM EUK-075S280DV/TV EUD-075S070DV/BV	
EL-SL20A(M)-80	80	HLG-80H-36A/42A ELG-075-36A/42A	EBD-075S250DV EUK-075S280DV/TV EUD-075S070DV/BV	SMD
EL-SL20A(M)-90	90	HLG-100H-36A/42A ELG-100-36A/42	EBD-100S280DV EUK-096S350DV/TV EUD-096S070DVA/BVA	SMD
EL-SL20A(L)-100	100	HLG-100H-36A/42A ELG-100-36A/42	EBD-100S280DV EUK-096S350DV/TV	SMD
EL-SL20A(L)-120	120	HLG-120H-36A/42A ELG-150-36A/42A	EBD-150S420DVA EUK-150S560DV/TV EUD-096S070DVA/BVA	SMD
EL-SL20A(L)-150	150	HLG-150H-36A/42A ELG-150-36A/42A	EBD-150S420DVA EUK-150S560DV/TV EUD-150S105DVA/BVA	SMD
EL-SL20A(L)-160	160	HLG-185H-36A ELG-150-36A/42A	EBD-150S420DVA EUK-150S560DV/TV EUD-150S105DVA/BVA	SMD
EL-SL68(MINI)-20	20	SS-30VA-56 SS-30VA-56B	--	SMD
EL-SL68(MINI)-30	30	SS-30VA-56 SS-30VA-56B	--	SMD
EL-SL68(MINI)-40	40	SS-50VA-56 SS-50VA-56B	--	SMD
EL-SL68(MINI)-50	50	SS-50VA-56 SS-50VA-56B	--	SMD
EL-SL68(S)-40	40	SS-50VA-56 SS-50VA-56B	--	SMD
EL-SL68(S)-50	50	SS-50VA-56 SS-50VA-56B	--	SMD
EL-SL68(S)-60	60	SS-75VA-56 SS-75VA-56B	--	SMD
EL-SL68(S)-70	70	SS-75VA-56 SS-75VA-56B	--	SMD
EL-SL68(S)-80	80	SS-75VA-56 SS-75VA-56B	--	SMD
EL-SL68(S)-90	90	SS-100VA-56 SS-100VA-56B	--	SMD
EL-SL68(S)-100	100	SS-100VA-56 SS-100VA-56B	--	SMD
EL-SL68(M)-90	90	SS-100VA-56 SS-100VA-56B	--	SMD
EL-SL68(M)-100	100	SS-100VA-56 SS-100VA-56B	--	SMD
EL-SL68(M)-120	120	SS-150VA-56 SS-150VA-56B	--	SMD
EL-SL68(M)-150	150	SS-150VA-56 SS-150VA-56B	--	SMD

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
3.2 (0)	GENERAL TEST REQUIREMENTS		P
3.2 (0.3)	More sections applicable	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> Section/s:	¾
3.2 (0.5)	Components	(see Annex 1)	¾
3.2 (0.7)	Information for luminaire design in light sources standards		¾
3.2 (0.7.2)	Light source safety standard	IEC 62031	¾
	Luminaire design in the light source safety standard		P
3.4 (2)	CLASSIFICATION OF LUMINAIRES		P
3.4 (2.2)	Type of protection	Class I	P
3.4 (2.3)	Degree of protection	IP66	¾
3.4 (2.4)	Luminaire suitable for direct mounting on normally flammable surfaces	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	¾
3.4 (2.5)	Luminaire for normal use	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	¾
	Luminaire for rough service	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	¾
3.4 (-)	Modes of installation of road or street lighting		¾
	a) on a pipe	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	¾
	b) on a mast arm	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	¾
	c) on a post top	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	¾
	d) on span or suspension wires	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	¾
	e) on a wall	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	¾
3.5 (3)	MARKING		P
3.5 (3.2)	Mandatory markings		P
	Position of the marking		P
	Format of symbols/text		P
3.5 (3.3)	Additional information		P
	Language of instructions	English	P
3.5 (3.3.1)	Combination luminaires		N/A
3.5 (3.3.2)	Nominal frequency in Hz	50/60	P
3.5 (3.3.3)	Operating temperature		P
3.5 (3.3.5)	Wiring diagram		N/A
3.5 (3.3.6)	Special conditions		N/A
3.5 (3.3.7)	Metal halide lamp luminaire – warning		N/A

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
3.5 (3.3.8)	Limitation for semi-luminaires		N/A
3.5 (3.3.9)	Power factor and supply current		P
3.5 (3.3.10)	Suitability for use indoors		N/A
3.5 (3.3.11)	Luminaires with remote control		N/A
3.5 (3.3.12)	Clip-mounted luminaire – warning		N/A
3.5 (3.3.13)	Specifications of protective shields		N/A
3.5 (3.3.14)	Symbol for nature of supply	~	P
3.5 (3.3.15)	Rated current of socket outlet		N/A
3.5 (3.3.16)	Rough service luminaire		N/A
3.5 (3.3.17)	Mounting instruction for type Y, type Z and some type X attachments	Type Y attachment	P
3.5 (3.3.18)	Non-ordinary luminaires with PVC cable		N/A
3.5 (3.3.19)	Protective conductor current in instruction if applicable		N/A
3.5 (3.3.20)	Provided with information if not intended to be mounted within arm's reach		N/A
3.5 (3.3.21)	Non-replaceable and non-user replaceable light sources information provided		P
3.5 (3.3.22)	Controllable luminaires, classification of insulation provided		N/A
3.5 (3.3.23)	Luminaire without controlgear provided with necessary information for selection of appropriate component		N/A
3.5 (3.3.24)	If not supplied with terminal block, information on the packaging		N/A
3.5 (3.4)	Test with water		P
	Test with hexane		P
	Legible after test		P
	Label attached		P
3.5 (-)	Additional information in instruction leaflet		P
	a) Design attitude		P
	b) Weight		P
	c) Overall dimensions		P
	d) Maximum projected area if applicable		P
	e) Cross-sectional area of wires if applicable		N/A
	f) Suitability for indoors use		N/A
	g) Dimensions of the compartment		N/A

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	h) Torque setting to be applied to bolts or screws		P
	i) Maximum mounting height		P
3.6 (4)	CONSTRUCTION		P
3.6 (4.2)	Components replaceable without difficulty		P
3.6 (4.3)	Wireways smooth and free from sharp edges		P
3.6 (4.4)	Lampholders		N/A
3.6 (4.4.1)	Integral lampholder		N/A
3.6 (4.4.2)	Wiring connection		N/A
3.6 (4.4.3)	Lampholder for end-to-end mounting		N/A
3.6 (4.4.4)	Positioning		N/A
	- pressure test (N)		—
	After test the lampholder comply with relevant standard sheets and show no damage		N/A
	After test on single-capped lampholder the lampholder have not moved from its position and show no permanent deformation		N/A
	- bending test (N)		—
	After test the lampholder have not moved from its position and show no permanent deformation		N/A
3.6 (4.4.5)	Peak pulse voltage		N/A
3.6 (4.4.6)	Centre contact		N/A
3.6 (4.4.7)	Parts in rough service luminaires resistant to tracking		N/A
3.6 (4.4.8)	Lamp connectors		N/A
3.6 (4.4.9)	Caps and bases correctly used		N/A
3.6 (4.4.10)	Light source for lampholder or connection according IEC 60061 not connected another way		N/A
3.6 (4.5)	Starter holders		N/A
	Starter holder in luminaires other than class II		N/A
	Starter holder class II construction		N/A
3.6 (4.6)	Terminal blocks		N/A
	Tails		N/A
	Unsecured blocks		N/A
3.6 (4.7)	Terminals and supply connections		P
3.6 (4.7.1)	Contact to metal parts		P
3.6 (4.7.2)	Test 8 mm live conductor		P

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Test 8 mm earth conductor		P
3.6 (4.7.3)	Terminals for supply conductors		P
3.6 (4.7.3.1)	Welded method and material		N/A
	- stranded or solid conductor		N/A
	- spot welding		N/A
	- welding between wires		N/A
	- Type Z attachment		N/A
	- mechanical test according to 15.6.2		N/A
	- electrical test according to 15.6.3		N/A
	- heat test according to 15.6.3.2.3 and 15.6.3.2.4		N/A
3.6 (4.7.4)	Terminals other than supply connection		P
3.6 (4.7.5)	Heat-resistant wiring/sleeves		N/A
3.6 (4.7.6)	Multi-pole plug		N/A
	- test at 30 N		N/A
3.6 (4.8)	Switches		N/A
	- adequate rating		N/A
	- adequate fixing		N/A
	- polarized supply		N/A
	- compliance with IEC 61058-1 for electronic switches		N/A
3.6 (4.9)	Insulating lining and sleeves		P
3.6 (4.9.1)	Retainment		P
	Method of fixing: Heat-shrinkable tube		P
3.6 (4.9.2)	Insulated linings and sleeves:		P
	Resistant to a temperature > 20 °C to the wire temperature or		P
	a) & c) Insulation resistance and electric strength		N/A
	b) Ageing test. Temperature (°C):		N/A
3.6 (4.10)	Double or reinforced insulation		N/A
3.6 (4.10.1)	No contact, mounting surface – accessible metal parts – wiring of basic insulation		N/A
	Safe installation fixed luminaires		N/A
	Capacitors and switches		N/A
	Interference suppression capacitors according to IEC 60384-14		N/A

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
3.6 (4.10.2)	Assembly gaps:		N/A
	- not coincidental		N/A
	- no straight access with test probe		N/A
3.6 (4.10.3)	Retainment of insulation:		N/A
	- fixed		N/A
	- unable to be replaced; luminaire inoperative		N/A
	- sleeves retained in position		N/A
	- lining in lampholder		N/A
3.6 (4.10.4)	Protective impedance device		N/A
	Double or reinforced insulation bridged by appropriate and at least two resistors or two Y2 capacitors or one Y1 capacitor		N/A
	Y1 or Y2 capacitors comply with IEC 60384-14		N/A
	Resistors comply with test (a) in 14.1 of IEC 60065		N/A
3.6 (4.11)	Electrical connections and current-carrying parts		P
3.6 (4.11.1)	Contact pressure		P
3.6 (4.11.2)	Screws:		N/A
	- self-tapping screws		N/A
	- thread-cutting screws		N/A
3.6 (4.11.3)	Screw locking:		P
	- spring washer		P
	- rivets		N/A
3.6 (4.11.4)	Material of current-carrying parts		P
3.6 (4.11.5)	No contact to wood or mounting surface		P
3.6 (4.11.6)	Electro-mechanical contact systems		P
3.6 (4.12)	Screws and connections (mechanical) and glands		P
3.6 (4.12.1)	Screws not made of soft metal		P
	Screws of insulating material		N/A
	Torque test: torque (Nm); part.....:	1,2Nm; Fixed LED driver	P
	Torque test: torque (Nm); part.....:	17 Nm; Fixing arm	P
	Torque test: torque (Nm); part.....:	0,8Nm; Fixing terminal	P
3.6 (4.12.2)	Screws with diameter < 3 mm screwed into metal		N/A
3.6 (4.12.4)	Locked connections:		N/A
	- fixed arms; torque (Nm).....:		N/A

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	- lampholder; torque (Nm).....:		N/A
	- push-button switches; torque 0,8 Nm.....:		N/A
3.6 (4.12.5)	Screwed glands; force (Nm).....:	6,25	P
3.6 (4.13)	Mechanical strength		P
3.6 (4.13.1)	Impact tests:		P
	- fragile parts; energy (Nm)		N/A
	- other parts; energy (Nm).....:	Enclosure+ Glass cover; 0,7	P
	1) live parts		P
	2) linings		N/A
	3) protection		P
	4) covers		P
3.6 (4.13.2)	Metal parts have adequate mechanical strength		P
3.6 (4.13.3)	Straight test finger		P
3.6 (4.13.4)	Rough service luminaires		N/A
	- IP54 or higher		N/A
	a) fixed		N/A
	b) hand-held		N/A
	c) delivered with a stand		N/A
	d) for temporary installations and suitable for mounting on a stand		N/A
3.6 (4.13.6)	Tumbling barrel		N/A
3.6 (4.14)	Suspensions, fixings and means of adjusting		P
3.6 (4.14.1)	Mechanical load:		P
	A) four times the weight		P
	B) torque 2,5 Nm		P
	C) bracket arm; bending moment (Nm)		N/A
	D) load track-mounted luminaires		N/A
	E) clip-mounted luminaires, glass-shelve. Thickness (mm)		N/A
	Metal rod. diameter (mm)		N/A
	Fixed luminaire or independent control gear without fixing devices		N/A
3.6 (4.14.2)	Load to flexible cables		N/A
	Mass (kg)		—
	Stress in conductors (N/mm ²)		N/A

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Mass (kg) of semi-luminaire		N/A
	Bending moment (Nm) of semi-luminaire		N/A
3.6 (4.14.3)	Adjusting devices:		N/A
	- flexing test; number of cycles.....		N/A
	- strands broken		N/A
	- electric strength test afterwards		N/A
3.6 (4.14.4)	Telescopic tubes: cords not fixed to tube; no strain on conductors		N/A
3.6 (4.14.5)	Guide pulleys		N/A
3.6 (4.14.6)	Strain on socket-outlets		N/A
3.6 (4.15)	Flammable materials		P
	- glow-wire test 650°C.....	See Test Table 3.15 (13.3.2)	P
	- spacing ³ 30 mm		N/A
	- screen withstanding test of 13.3.1		N/A
	- screen dimensions		N/A
	- no fiercely burning material		P
	- thermal protection		N/A
	- electronic circuits exempted		N/A
3.6 (4.15.2)	Luminaires made of thermoplastic material with lamp control gear		N/A
	a) construction		N/A
	b) temperature sensing control		N/A
	c) surface temperature		N/A
3.6 (4.16)	Luminaires for mounting on normally flammable surfaces		P
	No lamp control gear	(compliance with Section 12)	N/A
	Provided with adaptor for a track meet the requirements for direct mounting on normally flammable surfaces		N/A
3.6 (4.16.1)	Lamp control gear spacing:		N/A
	- spacing 35 mm		N/A
	- spacing 10 mm		N/A
3.6 (4.16.2)	Thermal protection:		N/A
	- in lamp control gear		N/A
	- external		N/A
	- fixed position		N/A
	- temperature marked lamp control gear		N/A

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
3.6 (4.16.3)	Design to satisfy the test of 12.6	(see clause 12.6)	N/A
3.6 (4.17)	Drain holes		N/A
	Clearance at least 5 mm		N/A
3.6 (4.18)	Resistance to corrosion		P
3.6 (4.18.1)	- rust-resistance		P
3.6 (4.18.2)	- season cracking in copper		N/A
3.6 (4.18.3)	- corrosion of aluminium		P
3.6 (4.19)	Igniters compatible with ballast		N/A
3.6 (4.20)	Rough service vibration		N/A
3.6 (4.21)	Protective shield		N/A
3.6 (4.21.1)	Shield fitted if tungsten halogen lamps or metal halide lamps		N/A
	Shield of glass if tungsten halogen lamps		N/A
3.6 (4.21.2)	Particles from a shattering lamp not impair safety		N/A
3.6 (4.21.3)	No direct path		N/A
3.6 (4.21.4)	Impact test on shield		N/A
	Glow-wire test on lamp compartment.....:	See Test Table 3.15 (13.3.2)	N/A
3.6 (4.22)	Attachments to lamps not cause overheating or damage		N/A
3.6 (4.23)	Semi-luminaires comply Class II		N/A
3.6 (4.24)	Photobiological hazards		P
3.6 (4.24.1)	No excessive UV radiation if tungsten halogen lamps and metal halide lamps (Annex P)		N/A
3.6 (4.24.2)	Retinal blue light hazard		P
	Class of risk group assessed according to IEC/TR 62778	Refer to Appendix 3	—
	Luminaires with E_{thr} :		N/A
	a) Fixed luminaires		N/A
	- distance x m, borderline between RG1 and RG2...:		N/A
	- marking and instruction according 3.2.23		N/A
	b) Portable and handheld luminaires		N/A
	- marking according 3.2.23 if RG1 exceeded at 200 mm according to IEC/TR 62778		N/A
	Portable luminaires for children IEC 60598-2-10 and Mains socket outlet nightlights IEC 60598-2-12 not exceed RG1 at 200 mm according to IEC/62778		N/A
3.6 (4.25)	Mechanical hazard		P

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	No sharp point or edges		P
3.6 (4.26)	Short-circuit protection		N/A
3.6 (4.26.1)	Adequate means of uninsulated accessible SELV parts		N/A
3.6 (4.26.2)	Short-circuit test with test chain according 4.26.3		N/A
	Test chain not melt through		N/A
	Test sample not exceed values of Table 12.1 and 12.2		N/A
3.6 (4.27)	Terminal blocks with integrated screwless earthing contacts		N/A
	Test according Annex V		N/A
	Pull test of terminal fixing (20 N)		N/A
	After test, resistance < 0,05 W		N/A
	Pull test of mechanical connection (50 N)		N/A
	After test, resistance < 0,05 W		N/A
	Voltage drop test, resistance < 0,05 W		N/A
3.6 (4.28)	Fixing of thermal sensing control		N/A
	Not plug-in or easily replaceable type		N/A
	Reliably kept in position		N/A
	No adhesive fixing if UV radiations from a lamp can degrade the fixing		N/A
	Not outside the luminaire enclosure		N/A
	Test of adhesive fixing:		N/A
	Max. temperature on adhesive material (°C):		—
	100 cycles between t min and t max		N/A
	Temperature sensing control still in position		N/A
3.6 (4.29)	Luminaires with non-replaceable light source		N/A
	Not possible to replace light source		N/A
	Live part not accessible after parts have been opened by hand or tools		N/A
3.6 (4.30)	Luminaires with non-user replaceable light source		P
	If protective cover provide protection against electric shock and marked with “caution, electric shock risk” symbol:		P
	Minimum two fixing means		P
3.6 (4.31)	Insulation between circuits		P
	Circuits insulated from LV supply fulfil requirements according 4.31.1 – 4.31.3		P

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Controllable luminaires requiring same level of insulation for all components, the insulation between control terminals and LV supply fulfil requirements according 4.31.1 – 4.31.3		N/A
3.6 (4.31.1)	SELV circuits		P
	Used SELV source		P
	Voltage \leq ELV		N/A
	Insulating of SELV circuits from LV supply		P
	Insulating of SELV circuits from other non SELV circuits		N/A
	Insulating of SELV circuits from FELV		N/A
	Insulating of SELV circuits from other SELV circuits		N/A
	SELV circuits insulated from accessible parts according Table X.1		P
	Plugs not able to enter socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Plugs and socket-outlets does not have protective conductor contact		N/A
3.6 (4.31.2)	FELV circuits		N/A
	Used FELV source		N/A
	Voltage \leq ELV		N/A
	Insulating of FELV circuits from LV supply		N/A
	FELV circuits insulated from accessible parts according Table X.1		N/A
	Plugs not able to enter socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Socket-outlets does not have protective conductor contact		N/A
3.6 (4.31.3)	Other circuits		P
	Other circuits insulated from accessible parts according Table X.1		P
	Class II construction with equipotential bonding for protection against indirect contacts with live parts:		N/A
	- conductive parts are connected together		N/A
	- test according 7.2.3		N/A

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	- conductive part not cause an electric shock in case of an insulation fault		N/A
	- equipotential bonding in master/slave applications		N/A
	- master luminaire provided with terminal for accessible conductive parts of slave luminaires		N/A
	- slave luminaire constructed as class I		N/A
3.6 (4.32)	Overvoltage protective devices		N/A
	Comply with IEC 61643-11		N/A
	External to controlgear and connected to earth:		N/A
	- only in fixed luminaires		N/A
	- only connected to protective earth		N/A
3.6.1 (-)	At least IP X3 or X5 respectively. IP :	IP66	P
	Column-integrated luminaires:		N/A
	- parts below 2,5 m. IP :		N/A
	- parts above 2,5 m. IP :		N/A
3.6.2 (-)	Suspension on span wires		N/A
3.6.3 (-)	Means for attaching the luminaire or external parts to its support appropriate to the weight		N/A
3.6.3.1 (-)	Static load test		P
	- drag coefficient..... :	1,2	P
	- loaded area (m²)..... :	0,24	P
	- used load (N)..... :	476,98	P
	- measured deformation (cm/m) :	0,2	P
	- no rotation		P
3.6.4 (-)	Adjustable lampholders		N/A
3.6.5 (-)	Luminaires installed above 5 m, glass covers shall be:		P
	a) glass that fractures into small pieces (test according to 3.6.5.1), or		N/A
	b) glass having a high impact shock resistance (test according to 3.6.5.2), or		P
	c) protected by any means to retain glass fragments		N/A
	For tunnel luminaires 3.6.5.1 apply		N/A
	Method of protection declared by the manufacturer		N/A
3.6.5.1 (-)	Protection by the use of glass that fractures into small pieces		N/A
	- number of particles is more than 40..... :		N/A
3.6.5.2 (-)	Protection by the use of high impact resistant glass		P

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
3.6.5.2.1 (-)	Glass covers have high mechanical strength		P
	Test according IEC 62262 with test apparatus according IEC 60068-2-75 with impact energy of 5J on preconditioned sample		P
3.6.5.2.2 (-)	Glass covers not break into large pieces		P
	- test according 3.6.5.1, number of particles is more than 20..... :	78	P
3.6.6 (-)	Connection compartment of column-integrated luminaire		N/A
	- provides adequate space		N/A
	- means for attachment		N/A
	- means for attachment of metal corrosion-resistant		N/A
3.6.7 (-)	Compliance with ISO standard or other..... :		N/A
3.6.8 (-)	Doors of column-integrated luminaires:		N/A
	- corrosion-resistant		N/A
	- opening only possible for an authorized person		N/A
	- impact test 5 Nm		N/A
	- sample show no damage		N/A
3.6.9 (-)	Column-integrated luminaire:		N/A
	- dimension of the cable entry slot (mm)..... :		N/A
	- cable path from the slot to the connection compartment (mm) :		N/A
	- cable path free from obstruction that might cause abrasion of the cable		N/A

3.7 (11)	CREEPAGE DISTANCES AND CLEARANCES		P
3.7 (11.2.1)	Impulse withstand category (Normal category II)	Category II <input checked="" type="checkbox"/> Category III <input type="checkbox"/>	¾
	Category III according Annex U		N/A
	Protected against pollution, reduced creepage and clearance according Annex P of IEC 61347-1		N/A
3.7 (11.2.2)	Creepage distances for frequency up to 30 kHz	See Test Table 3.7 (11.2) I	P
	Creepage distances for frequency over 30 kHz:		N/A
	- Controlgear marked with \hat{U}_{OUT} and f_{UOUT} according IEC 61347-1, clause 7.1, item w	See Test Table 3.7 (11.2) II	N/A
	- Requirements according IEC 60664-4 for controlgear not covered by IEC 61347	See Test Table 3.7 (11.2) II	N/A
3.7 (11.2.3)	Clearances for frequency up to 30 kHz	See Test Table 3.7 (11.2) I	P
	Clearances distances for frequency over 30 kHz:		N/A

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	- Controlgear marked with U_P	See Test Table 3.7 (11.2) II	N/A
	- Requirements according IEC 60664-4 for controlgear not covered by IEC 61347	See Test Table 3.7 (11.2) II	N/A

3.8 (7)	PROVISION FOR EARTHING		P
3.8 (7.2.1 + 7.2.3)	Accessible metal parts		P
	Metal parts in contact with supporting surface		P
	Resistance < 0,5 W.....:	0,071	P
	Self-tapping screws used		N/A
	Thread-forming screws		N/A
	Thread-forming screw used in a groove		N/A
	Earth makes contact first		P
	Terminal blocks with integrated screwless earthing contacts tested according Annex V		N/A
	Protective earthing of the luminaire not via built-in control gear		P
3.8 (7.2.2 + 7.2.3)	Earth continuity in joints, etc.		N/A
3.8 (7.2.4)	Locking of clamping means		P
	Compliance with 4.7.3		P
	Terminal blocks with integrated screwless earthing contacts tested according Annex V		N/A
3.8 (7.2.5)	Earth terminal integral part of connector socket		N/A
3.8 (7.2.6)	Earth terminal adjacent to mains terminals		P
3.8 (7.2.7)	Electrolytic corrosion of the earth terminal		P
3.8 (7.2.8)	Material of earth terminal		P
	Contact surface bare metal		P
3.8 (7.2.10)	Class II luminaire for looping-in		N/A
	Double or reinforced insulation to functional earth		N/A
3.8 (7.2.11)	Earthing core coloured green-yellow		P
	Length of earth conductor		P
3.8.1 (-)	Attachment prevented from rotation		N/A

3.9 (14)	SCREW TERMINALS		P
	Separately approved; component list	(see Annex 1)	P

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Part of the luminaire	(see Annex 3)	N/A
3.9 (15)	SCREWLESS TERMINALS AND ELECTRICAL CONNECTIONS		P
	Separately approved; component list	(see Annex 1)	N/A
	Part of the luminaire	(see Annex 4)	P
3.10 (5)	EXTERNAL AND INTERNAL WIRING		P
3.10 (5.2)	Supply connection and external wiring		P
3.10 (5.2.1)	Means of connection.....	Supply cord	P
	Outdoor luminaire has not PVC insulated external wiring if not class III or SELV ≤ 25 V a.c./60 V d.c. or protected from outdoor environment		N/A
3.10 (5.2.2)	Type of cable.....	See Annex 1	P
	Nominal cross-sectional area (mm ²).....	See Annex 1	P
	Cables equal to IEC 60227 or IEC 60245		P
3.10 (5.2.3)	Type of attachment, X, Y or Z	Type Y	P
3.10 (5.2.5)	Type Z not connected to screws		N/A
3.10 (5.2.6)	Cable entries:		P
	- suitable for introduction		P
	- adequate degree of protection		P
3.10 (5.2.7)	Cable entries through rigid material have rounded edges		P
3.10 (5.2.8)	Insulating bushings:		N/A
	- suitably fixed		N/A
	- material in bushings		N/A
	- material not likely to deteriorate		N/A
	- tubes or guards made of insulating material		N/A
3.10 (5.2.9)	Locking of screwed bushings		N/A
3.10 (5.2.10)	Cord anchorage:		P
	- covering protected from abrasion		P
	- clear how to be effective		P
	- no mechanical or thermal stress		P
	- no tying of cables into knots etc.		P
	- insulating material or lining		P

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
3.10 (5.2.10.1)	Cord anchorage for type X attachment:		N/A
	a) at least one part fixed		N/A
	b) types of cable		N/A
	c) no damaging of the cable		N/A
	d) whole cable can be mounted		N/A
	e) no touching of clamping screws		N/A
	f) metal screw not directly on cable		N/A
	g) replacement without special tool		N/A
	Glands not used as anchorage		N/A
	Labyrinth type anchorages		N/A
3.10 (5.2.10.2)	Adequate cord anchorage for type Y and type Z attachment	Type Y	P
3.10 (5.2.10.3)	Tests:		P
	- impossible to push cable; unsafe		P
	- pull test: 25 times; pull (N):	60 (for 3×1,0 mm ²) / 80 (3×1,5 mm ²)	P
	- torque test: torque (Nm).....:	0,25 (for 3×1,0 mm ²) / 0,35 (3×1,5 mm ²)	P
	- displacement £ 2 mm		P
	- no movement of conductors		P
	- no damage of cable or cord		P
	- function independent of electrical connection		P
3.10 (5.2.11)	External wiring passing into luminaire		P
3.10 (5.2.12)	Looping-in terminals		N/A
3.10 (5.2.13)	Wire ends not tinned		P
	Wire ends tinned: no cold flow		N/A
3.10 (5.2.14)	Mains plug same protection		N/A
	Class III luminaire plug		N/A
	No unsafe compatibility		N/A
3.10 (5.2.16)	Appliance inlets (IEC 60320)		N/A
	Installation couplers (IEC 61535)		N/A

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Other appliance inlet or connector according relevant IEC standard		N/A
3.10 (5.2.17)	No standardized interconnecting cables properly assembled		N/A
3.10 (5.2.18)	Used plug in accordance with		N/A
	- IEC 60083		N/A
	- other standard		N/A
3.10 (5.3)	Internal wiring		P
3.10 (5.3.1)	Internal wiring of suitable size and type		P
	Through wiring		N/A
	- not delivered/ mounting instruction		N/A
	- factory assembled		N/A
	- socket outlet loaded (A)		N/A
	- temperatures	(see Annex 2)	N/A
	Green-yellow for earth only		P
3.10 (5.3.1.1)	Internal wiring connected directly to fixed wiring		P
	Cross-sectional area (mm ²)	(see Annex 1)	P
	Insulation thickness (mm)	(see Annex 1)	P
	Extra insulation added where necessary		N/A
3.10 (5.3.1.2)	Internal wiring connected to fixed wiring via internal current-limiting device		P
	Cross-sectional area (mm ²)	(see Annex 1)	P
3.10 (5.3.1.3)	Double or reinforced insulation for class II		N/A
3.10 (5.3.1.4)	Conductors without insulation		N/A
3.10 (5.3.1.5)	SELV current-carrying parts		P
3.10 (5.3.1.6)	Insulation thickness other than PVC or rubber		N/A
3.10 (5.3.2)	Sharp edges etc.		P
	No moving parts of switches etc.		N/A
	Joints, raising/lowering devices		N/A
	Telescopic tubes etc.		N/A
	No twisting over 360°		P

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
3.10 (5.3.3)	Insulating bushings:		N/A
	- suitable fixed		N/A
	- material in bushings		N/A
	- material not likely to deteriorate		N/A
	- cables with protective sheath		N/A
3.10 (5.3.4)	Joints and junctions effectively insulated		N/A
3.10 (5.3.5)	Strain on internal wiring		N/A
3.10 (5.3.6)	Wire carriers		N/A
3.10 (5.3.7)	Wire ends not tinned		P
	Wire ends tinned: no cold flow		N/A
3.10 (5.4)	Test to determine suitability of conductors having a reduced cross-sectional area		N/A
	Under test the temperature of the luminaire wiring insulation not exceed the limits stated in Table 12.2	(see Annex 2)	N/A
	No damage to luminaire wiring after test		N/A
3.10.1 (-)	Cord anchorage if applicable		P
	- pull test: 25 times; pull (N) :	60	P
	- torque test: torque (Nm)..... :	0,25	P

3.11 (8)	PROTECTION AGAINST ELECTRIC SHOCK		P
3.11 (8.2.1)	Live parts not accessible		P
	Basic insulated parts not used on the outer surface without appropriate protection		P
	Basic insulated parts not accessible with standard test finger on portable, settable and adjustable luminaires		N/A
	Basic insulated parts not accessible with Ø 50 mm probe from outside, other types of luminaires		P
	Lamp and starterholders in portable and adjustable luminaires comply with double or reinforced insulation requirements		N/A
	Basic insulation only accessible under lamp or starter replacement		N/A
	Protection in any position		P
	Double-ended tungsten filament lamp		N/A
	Insulation lacquer not reliable		P
	Double-ended high-pressure discharge lamp		N/A

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Relevant warning according to 3.2.18 fitted to the luminaire		N/A
3.11 (8.2.2)	Portable luminaire adjusted in most unfavourable position		N/A
3.11 (8.2.3.a)	Class II luminaire:		N/A
	- basic insulated metal parts not accessible during starter or lamp replacement		N/A
	- basic insulation not accessible other than during starter or lamp replacement		N/A
	- glass protective shields not used as supplementary insulation		N/A
3.11 (8.2.3.b)	BC lampholder of metal in class I luminaires shall be earthed		N/A
3.11 (8.2.3.c)	SELV circuits with exposed current carrying parts:		N/A
	Ordinary luminaire:		N/A
	- voltage under load (V)		N/A
	- no-load voltage (V)		N/A
	- touch current if applicable (mA)		N/A
	One conductive part insulated if required		N/A
	Other than ordinary luminaire:		N/A
	- nominal voltage (V)		N/A
	Class III luminaire only for connection to SELV		N/A
	Class III luminaire not provided with means for protective earthing		N/A
3.11 (8.2.4)	Portable luminaire has protection independent of supporting surface		N/A
3.11 (8.2.5)	Compliance with the standard test finger or relevant probe		P
3.11 (8.2.6)	Covers reliably secured		P
3.11 (8.2.7)	Luminaire other than below with capacitor > 0,5 nF not exceed 50 V 1 min after disconnection		P
	Portable luminaire with capacitor > 0,1 nF (0.25) not exceed 34 V 1 s after disconnection		N/A
	Other luminaires with capacitor > 0,1 nF (0.25) with plug and track adaptors not exceed 60 V 5 s after disconnection		N/A

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
3.12 (12)	ENDURANCE TEST AND THERMAL TEST		P
3.12.2 (-)	If IP > IP 20 relevant test of (12.4), (12.5) and (12.6) after (9.2) before (9.3) specified in 3.13		¾
3.12 (12.2)	Selection of lamps and ballasts		¾
	Lamp used according Annex B	(Lamp used see Annex 2)	¾
	Controlgear if separate and not supplied	(Controlgear used see Annex 2)	¾
3.12 (12.3)	Endurance test		P
	a) mounting-position	Normal position	¾
	b) test temperature (°C)	60	¾
	c) total duration (h)	240	¾
	d) supply voltage (V)	264	¾
	d) if not equipped with controlgear, constant voltage/current (V) or (A)		¾
	e) luminaire ceases to operate		¾
3.12 (12.3.2)	After endurance test:		P
	- no part unserviceable		P
	- luminaire not unsafe		P
	- no damage to track system		N/A
	- marking legible		P
	- no cracks, deformation etc.		P
3.12 (12.4)	Thermal test (normal operation)	(see Annex 2)	P
3.12 (12.5)	Thermal test (abnormal operation)	(see Annex 2)	P
3.12 (12.6)	Thermal test (failed lamp control gear condition):		N/A
3.12 (12.6.1)	Through wiring or looping-in wiring loaded by a current of (A)		¾
	- case of abnormal conditions		¾
	- electronic lamp control gear		N/A
	- measured winding temperature (°C): at 1,1 Un		¾
	- measured mounting surface temperature (°C) at 1,1 Un		N/A
	- calculated mounting surface temperature (°C)		N/A
	- track-mounted luminaires		N/A
3.12 (12.6.2)	Temperature sensing control		N/A
	- case of abnormal conditions		¾

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	- thermal link		N/A
	- manual reset cut-out		N/A
	- auto reset cut-out		N/A
	- measured mounting surface temperature (°C)		N/A
	- track-mounted luminaires		N/A
3.12 (12.7)	Thermal test (failed lamp control gear in plastic luminaires):		N/A
3.12 (12.7.1)	Luminaire without temperature sensing control		N/A
3.12 (12.7.1.1)	Luminaire with fluorescent lamp ≤ 70W		N/A
	Test method 12.7.1.1 or Annex W		¾
	Test according to 12.7.1.1:		N/A
	- case of abnormal conditions		¾
	- Ballast failure at supply voltage (V)		¾
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A
	Test according to Annex W:		N/A
	- case of abnormal conditions		¾
	- measured winding temperature (°C): at 1,1 Un		¾
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un		¾
	- calculated temperature of fixing point/exposed part (°C)		¾
	Ball-pressure test.....	See Test Table 3.15 (13.2.1)	N/A
3.12 (12.7.1.2)	Luminaire with discharge lamp, fluorescent lamp > 70W, transformer > 10 VA		N/A
	- case of abnormal conditions		¾
	- measured winding temperature (°C): at 1,1 Un		¾
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un		¾
	- calculated temperature of fixing point/exposed part (°C)		¾
	Ball-pressure test.....	See Test Table 3.15 (13.2.1)	N/A
3.12 (12.7.1.3)	Luminaire with short circuit proof transformers ≤ 10 VA		N/A
	- case of abnormal conditions		¾

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A
3.12 (12.7.2)	Luminaire with temperature sensing control		N/A
	- thermal link.....: Yes <input type="checkbox"/> No <input type="checkbox"/>		¾
	- manual reset cut-out.....: Yes <input type="checkbox"/> No <input type="checkbox"/>		¾
	- auto reset cut-out: Yes <input type="checkbox"/> No <input type="checkbox"/>		¾
	- case of abnormal conditions:		¾
	- highest measured temperature of fixing point/ exposed part (°C):		¾
	Ball-pressure test:.....:	See Test Table 3.15 (13.2.1)	N/A
3.12.1 (-)	Temperature reduction if for outdoor use only		P
3.12.2 (-)	(See above)		¾
3.12.3 (-)	Glass covers used within the thermal limits declared by the glass manufacturer		P

3.13 (9)	RESISTANCE TO DUST AND MOISTURE		P
3.13.1 (-)	If IP > IP 20 the order of tests as specified in clause 3.12		P
3.13 (9.2)	Tests for ingress of dust, solid objects and moisture:		P
	- classification according to IP.....:	IP66	¾
	- mounting position during test.....:	Normal position	¾
	- fixing screws tightened; torque (Nm).....:	2/3 torque	¾
	- tests according to clauses:	cl 9.2.2 & cl 9.2.7	¾
	- electric strength test afterwards		P
	a) no deposit in dust-proof luminaire		N/A
	b) no talcum in dust-tight luminaire		P
	c) no trace of water on current-carrying parts or on insulation where it could become a hazard		P
	c.1) For luminaires without drain holes – no water entry		P
	c.2) For luminaires with drain holes – no hazardous water entry		N/A
	d) no water in watertight or pressure watertight luminaire		N/A
	e) no contact with live parts (IP 2X)		N/A
	e) no entry into enclosure (IP 3X and IP 4X)		N/A

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	e) no contact with live parts through drain holes and ventilation slots (IP3X and IP4X)		N/A
	f) no trace of water on part of lamp requiring protection from splashing water		N/A
	g) no damage of protective shield or glass envelope		P
3.13 (9.3)	Humidity test 48 h		P

3.14 (10)	INSULATION RESISTANCE AND ELECTRIC STRENGTH		P
3.14 (10.2.1)	Insulation resistance test		P
	Cable or cord covered by metal foil or replaced by a metal rod of mm Ø	Covered by metal foil	¾
	Insulation resistance (MW)	See below	¾
	SELV		P
	- between current-carrying parts of different polarity :		N/A
	- between current-carrying parts and mounting surface	100 MW	P
	- between current-carrying parts and metal parts of the luminaire.....	100 MW	P
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts		N/A
	- Insulation bushings as described in Section 5		N/A
	Other than SELV		P
	- between live parts of different polarity	100 MW	P
	- between live parts and mounting surface	100 MW	P
	- between live parts and metal parts.....	100 MW	P
	- between live parts of different polarity through action of a switch.....		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts	100 MW	P
	- Insulation bushings as described in Section 5		N/A
3.14 (10.2.2)	Electric strength test		P
	Dummy lamp		N/A
	Luminaires with ignitors after 24 h test		N/A
	Luminaires with manual ignitors		N/A

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
	Test voltage (V)	See below	P
	SELV		P
	- between current-carrying parts of different polarity :		N/A
	- between current-carrying parts and mounting surface	500V	P
	- between current-carrying parts and metal parts of the luminaire.....	500V	P
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts		N/A
	- Insulation bushings as described in Section 5		N/A
	Other than SELV		P
	- between live parts of different polarity.....	1480V	P
	- between live parts and mounting surface	1480V	P
	- between live parts and metal parts.....	1480V	P
	- between live parts of different polarity through action of a switch.....		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts	1480V	P
	- Insulation bushings as described in Section 5		N/A
3.14 (10.3)	Touch current or protective conductor current (mA):	Max. 0,653	P

3.15 (13)	RESISTANCE TO HEAT, FIRE AND TRACKING		P
3.15 (13.2.1)	Ball-pressure test.....	See Test Table 3.15 (13.2.1)	P
3.15 (13.3.1)	Needle-flame test (10 s)	See Test Table 3.15 (13.3.1)	P
3.15 (13.3.2)	Glow-wire test (650°C).....	See Test Table 3.15 (13.3.2)	P
3.15 (13.4)	Proof tracking test (IEC 60112).....	See Test Table 3.15 (13.4)	N/A

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict

3.7 (11.2)	TABLE I: Creepage distances and clearances							P
	Minimum distances (mm) for a.c. up to 30 kHz sinusoidal voltages							P
	Applicable part of IEC 60598-1 Table 11.1.A*, 11.1.B* and 11.2*							P
	Insulation type **	Measured clearance	Required		Measured creepage	Required		
			clearance	*Table		creepage	*Table	
Distance 1:	B	2,37	1,5	11.1.B	3,55	2,5	11.1.A	
Working voltage (V)					240		¾	
PTI					< 600 ☒ ≥ 600 ☐		¾	
Pulse voltage or U_P if applicable (kV)					N/A		¾	
Supplementary information: L to N (terminal)								
Distance 2:	B	2,53	1,5	11.1.B	4,67	2,5	11.1.A	
Working voltage (V)					240		¾	
PTI					< 600 ☒ ≥ 600 ☐		¾	
Pulse voltage or U_P if applicable (kV)					N/A		¾	
Supplementary information: L/N to earthed metal enclosure								
Distance 3:	B	2,0	0,5	11.1.B	2,0	1,6	11.1.A	
Working voltage (V)					Uout: SELV		¾	
PTI					< 600 ☒ ≥ 600 ☐		¾	
Pulse voltage or U_P if applicable (kV)					N/A		¾	
Supplementary information:								
Between +/- to earthed enclosure								
Current-carrying of different polarity								

** Insulation type: B – Basic; S – Supplementary; R – Reinforced. See also IEC 60598-1 Annex M.

3.7 (11.2)	TABLE II: Creepage distances and clearances						N/A
	Minimum distances (mm) for a.c. higher than 30 kHz sinusoidal voltages						
	Applicable part of IEC 61347-1 Table 7 and 8* or IEC 60664-4 Table 1 and 2						
Distances	Insulation type **	Measured clearance	Required		Measured creepage	Required	
			clearance	*Table		creepage	*Table
Distance 1:							
Working voltage (V)							¾
Frequency if applicable (kHz)							¾
PTI					< 600 <input type="checkbox"/> ≥ 600 <input type="checkbox"/>		¾

IEC 60598-2-3							
Clause	Requirement + Test				Result - Remark		Verdict
Peak value of the working voltage \hat{U}_{out} if applicable (kV)							$\frac{3}{4}$
Supplementary information:							
Distance 2:							
Working voltage (V)							$\frac{3}{4}$
Frequency if applicable (kHz)							$\frac{3}{4}$
PTI					< 600 <input type="checkbox"/> \geq 600 <input type="checkbox"/>		$\frac{3}{4}$
Peak value of the working voltage \hat{U}_{out} if applicable (kV)							$\frac{3}{4}$
Supplementary information:							
Distance 3:							
Working voltage (V)							$\frac{3}{4}$
Frequency if applicable (kHz)							$\frac{3}{4}$
PTI					< 600 <input type="checkbox"/> \geq 600 <input type="checkbox"/>		$\frac{3}{4}$
Peak value of the working voltage \hat{U}_{out} if applicable (kV)							$\frac{3}{4}$
Supplementary information:							

** Insulation type: B – Basic; S – Supplementary; R – Reinforced.

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict

3.15 (13.2.1)	TABLE: Ball Pressure Test of Thermoplastics			P
Allowed impression diameter (mm)		2		¾
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)	
Electro-mechanical contact system	See Annex 1	125	1,17	
Screwless terminal	See Annex 1	125	1,21	
Connector on LED module	See Annex 1	125	1,08	
Supplementary information: N/A				

3.15 (13.3.1)	TABLE: Needle-flame test (IEC 60695-11-5)				P
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
Electro-mechanical contact system	See Annex 1	10	No	0	P
Screwless terminal	See Annex 1	10	No	0	P
Connector on LED module	See Annex 1	10	No	0	P
Supplementary information:					

3.15 (13.3.2)	TABLE: Glow-wire test (IEC 60695-2-11)				P
Glow wire temperature			650°C		¾
Object/ Part No./ Material	Manufacturer/ trademark		Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
Heat-shrinkable tube	See Annex 1		No	0	P
Lens	See Annex 1		No	0	P
Supplementary information: N/A					

3.15 (13.4)	TABLE: Proof tracking test (IEC 60112)			N/A
Test voltage PTI		175 V		¾

IEC 60598-2-3						
Clause	Requirement + Test			Result - Remark		Verdict
Object/ Part No./ Material	Manufacturer/ trademark	Withstand 50 drops without failure on three places or on three specimens			Verdict	
Supplementary information:						

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 1	TABLE: Critical components information						P
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾	
LED	C	CREE, INC.	XTE	2.85-3.4V, 0.35-1A	IEC 60598-1 IEC 60598-2-3	Test with appliance	
			CXA2520	34-42V,0,3-1,25A			
			CXA/CXB2530	34-42V,0,5-1,6A			
			CXA/CAB2540	34-42V, 0,7-2,1A			
			CXA/CXB3050	34-42V,1,0-2,5A			
		LUMILEDS	LUXEON 3030 2D	5.8-6.4V,0.05-0.2A			
			LUXEON 5050	If:160 mA; Vf:23,5-26,5V			
			LUXEON 5050	If:800 mA; Vf:5,8-6,6V			
		OSRAM	Square S5 P8	5.8-6.6V,0.08-1,0A/23.5-26.5V, 0,02-0,3A			
		CITIZEN ELECTRONICS CO.,LTD	CLU048	31.8-37.5V@0.3-2.76A 47.8-56.2@0.5-4.14A			
LED driver (Details see “General product information”)	B	INVENTRONICS (HANGZHOU), INC.	EUC-026S070SVM EUC-026S050SVM	Input:120-240V~, 50/60Hz Output: SELV, IP67, tc: 85°C	IEC 61347-1 IEC 61347-2-13	TUV HN 69257439	

IEC 60598-2-3						
Clause	Requirement + Test			Result - Remark		Verdict
LED driver (Details see "General product information")	B	INVENTRONICS (HANGZHOU), INC.	EUC- 036S105SV; EUC- 036S070SV EUC- 036S140SV EUC- 035S070SVM EUC- 035S105SVM EUC- 052S105SV; EUC- 052S140SV; EUC-052S; EUC- 060S070SVM EUC- 060S105SVM EUC- 060S180SVM	Input:100-240V~, 50/60Hz Output: SELV, IP67, tc: 90°C	IEC 61347-1 IEC 61347-2- 13	TUV R 50263435
LED driver (Details see "General product information")	B	INVENTRONICS (HANGZHOU), INC.	EBS- 040S070DTE; EBS- 040S070BTE	Input:220- 240V~50/60Hz Output: SELV, IP67, tc:90°C	IEC 61347-1; IEC 61347-2- 13	TUV SUD U6 16 12 79136 151
LED driver (Details see "General product information")	B	INVENTRONICS (HANGZHOU), INC.	EUK- 075S280DV/T V EUK- 075S175DV/T V	Input:100-240V~, 50/60Hz Output: SELV, IP67, tc: 90°C	IEC 61347-1 IEC 61347-2- 13	TUV HN69257105
LED driver (Details see "General product information")	B	INVENTRONICS (HANGZHOU), INC.	EUD- 075S070DV/B V	Input:100-240V~, 50/60Hz Output: SELV, IP67, tc: 90°C	IEC 61347-1 IEC 61347-2- 13	TUV HN69260159
LED driver (Details see "General product information")	B	INVENTRONICS (HANGZHOU), INC.	EBD- 075S250DV	Input:200- 240V~50/60Hz Output: SELV, IP67, tc: 90°C	IEC 61347-1 IEC 61347-2- 13	TUV R 50392930
LED driver (Details see "General product information")	B	INVENTRONICS (HANGZHOU), INC.	EBD- 100S280DV- 00V0	Input:200- 240V~50/60Hz Output: SELV, IP67, tc: 90°C	IEC 61347-1 IEC 61347-2- 13	TUV R 50403964
LED driver (Details see "General product information")	B	INVENTRONICS (HANGZHOU), INC.	EUK- 096S350DV/T V EUK- 096S210DV/T V	Input:100- 240V~50/60Hz Output: SELV, IP67, tc: 90°C	IEC 61347-1 IEC 61347-2- 13	TUV HN69258246

IEC 60598-2-3						
Clause	Requirement + Test			Result - Remark		Verdict
LED driver (Details see "General product information")	B	INVENTRONICS (HANGZHOU), INC.	EUD- 096S070DVA/ BVA	Input:100- 240V~50/60Hz Output: SELV, IP67, tc: 90°C	IEC 61347-1 IEC 61347-2- 13	TUV HN69260119
LED driver (Details see "General product information")	B	INVENTRONICS (HANGZHOU), INC.	EBD- 150S420DVA 00V0 EBD- 200S560DV EBD- 240S560DV EBD- 240S660DV	Input:200- 240V~50/60Hz Output: SELV, IP67, tc: 90°C	IEC 61347-1 IEC 61347-2- 13	TUV R 50297531
LED driver (Details see "General product information")	B	INVENTRONICS (HANGZHOU), INC.	EUK- 150S560DV/T V EUK- 150S350DV/T V	Input:100- 240V~50/60Hz Output: SELV, IP67, tc: 85°C	IEC 61347-1 IEC 61347-2- 13	TUV HN69257218
LED driver (Details see "General product information")	B	INVENTRONICS (HANGZHOU), INC.	EUD- 150S105DVA/ BVA	Input:100- 240V~50/60Hz Output: SELV, IP67, tc: 85°C	IEC 61347-1 IEC 61347-2- 13	TUV HN69260422
LED driver (Details see "General product information")	B	INVENTRONICS (HANGZHOU), INC.	EUK- 200S560DV/T V; EUK- 200S350DV/T V EUK- 240S670DV/T V EUK- 240S420DV/T V	Input:100- 240V~50/60Hz Output: SELV, IP67, tc: 90°C	IEC 61347-1 IEC 61347-2- 13	TUV HN69257905
LED driver (Details see "General product information")	B	INVENTRONICS (HANGZHOU), INC.	EUD- 200S105DVA/ BVA	Input:100- 240V~50/60Hz Output: SELV, IP67, tc: 90°C	IEC 61347-1 IEC 61347-2- 13	TUV SUD U6 17 11 79136 186
LED driver (Details see "General product information")	B	INVENTRONICS (HANGZHOU), INC.	EUD- 240S105DVA/ BVA	Input:100- 240V~50/60Hz Output: SELV, IP67, tc: 90°C	IEC 61347-1 IEC 61347-2- 13	TUV HN69256855
LED driver (Details see "General product information")	B	Mean Well Enterprises Co., Ltd.	HLG-40H- 36A; HLG- 40H-30A; HLG-40H- 42A; HLG- 40H-48A HLG-40H-54A HLG-40H-24A	Input:220- 240V~50/60Hz Output: SELV, IP67, tc: 90°C	IEC 61347-1 IEC 61347-2- 13	TUV 50213993/ RCM7861076 0355

IEC 60598-2-3						
Clause	Requirement + Test			Result - Remark		Verdict
LED driver (Details see "General product information")	B	Mean Well Enterprises Co., Ltd.	HLG-60H-36A; HLG-60H-30A; HLG-60H-42A; HLG-60H-54A; ELG-075-36A/42A ELG-075-54A	Input: 220-240V~50/60Hz Output: SELV, IP67, tc: 90°C	IEC 61347-1 IEC 61347-2-13	TUV R 50213993/SA A-171226- EA/RCM7861 0760355
LED driver (Details see "General product information")	B	Mean Well Enterprises Co., Ltd.	HLG-80H-30A; HLG-80H-42A; HLG-80H-54A; HLG-80H-24A HLG-80H-36A; ELG-075-36A/42A ELG-075-54A ELG-075-24A	Input: 220-240V~50/60Hz Output: SELV, IP67, tc: 90°C	IEC 61347-1 IEC 61347-2-13	TUV R 50202561/ SAA-171226- EA/RCM7861 0760355
LED driver (Details see "General product information")	B	Mean Well Enterprises Co., Ltd.	HLG-100H-36A; HLG-100H-42A; HLG-100H-54A; ELG-100-36A/42A ELG-100-54A	Input: 220-240V~50/60Hz Output: SELV, IP67, tc: 90°C	IEC 61347-1 IEC 61347-2-13	TUV R 50185176/ SAA-171311- EA/RCM8114 5810206
LED driver (Details see "General product information")	B	Mean Well Enterprises Co., Ltd.	HLG-120H-36A; HLG-120H-42A; HLG-120H-54A; ELG-150-36A/42A ELG-150-54A	Input: 100-240V~50/60Hz Output: SELV, IP65, tc: 90°C	IEC 61347-1 IEC 61347-2-13	TUV R 50185176/SA A-171915- EA/RCM8114 5810206
LED driver (Details see "General product information")	B	Mean Well Enterprises Co., Ltd.	HLG-150H-36A; HLG-150H-42A; HLG-150H-54A; ELG-150-36A/42A ELG-150-54A	Input: 100-240V~50/60Hz Output: SELV, IP65, tc: 90°C	IEC 61347-1 IEC 61347-2-13	TUV R 50185176/ SAA-171915- EA/RCM8114 5810206

IEC 60598-2-3						
Clause	Requirement + Test			Result - Remark		Verdict
LED driver (Details see "General product information")	B	Mean Well Enterprises Co., Ltd.	HLG-185H- 36A; HLG-185H- 42A; HLG-185H- 54A; ELG-200- 36A/42A ELG-200-54A	Input:100- 240V~50/60Hz Output: SELV, IP65, tc: 90°C	IEC 61347-1 IEC 61347-2- 13	TUV R 50185176/ SAA-170901- EA/RCM8114 5810206
LED driver (Details see "General product information")	B	Mean Well Enterprises Co., Ltd.	HLG-240H- 36A; HLG-240H- 42A; HLG-240H- 54A; ELG-240- 36A/42A ELG-240-54A	Input:100- 240V~50/60Hz Output: SELV, IP65, tc: 90°C	IEC 61347-1 IEC 61347-2- 13	TUV R 50171751/ SAA-170901- EA/RCM7861 0760355
LED driver (Details see"General product information")	B	Shenzhen Sosen Electronics Co.,Ltd	SS-30VA-56 SS-30VA-56B	Input:100- 240V~50/60Hz Output: SELV , IP67, tc: 90°C	IEC 61347-1 IEC 61347-2- 13	ENEC 35- 112032
LED driver (Details see"General product information")	B	Shenzhen Sosen Electronics Co.,Ltd	SS-50VA-56 SS-50VA-56B	Input:100- 240V~50/60Hz Output: SELV , IP67, tc: 90°C	IEC 61347-1 IEC 61347-2- 13	ENEC 35- 112032
LED driver (Details see"General product information")	B	Shenzhen Sosen Electronics Co.,Ltd	SS-75VA-56 SS-75VA-56B	Input:100- 240V~50/60Hz Output: SELV , IP67, tc: 90°C	IEC 61347-1 IEC 61347-2- 13	EMC 4354186.01A OC
LED driver (Details see"General product information")	B	Shenzhen Sosen Electronics Co.,Ltd	SS-100VA-56 SS-100VA- 56B	Input:100- 240V~50/60Hz Output: SELV , IP67, tc: 90°C	IEC 61347-1 IEC 61347-2- 13	EMC 4354186.01A OC
LED driver (Details see"General product information")	B	Shenzhen Sosen Electronics Co.,Ltd	SS-150VA-56 SS-150VA- 56B	Input:100- 240V~50/60Hz Output: SELV , IP67, tc: 90°C	IEC 61347-1 IEC 61347-2- 13	EMC 4354186.01A OC
Power cord	B	Zhejiang Jinniu Cable Co., Ltd	H05RN-F	3×1,0 mm ²	DIN EN 50525-2-11	VDE 40028195
(Alternative)	D	Zhejiang Jinniu Cable Co., Ltd	H07RN-F	3×1,5 mm ²	DIN EN 50525-2-11	VDE 40028195
(Alternative)	D	Ningbo Xuanshi Electronics Co., Ltd	H05RN-F	3×1,0 mm ²	AS/NZS 60245.4:2003 +A1	ESO160593/0 0

IEC 60598-2-3						
Clause	Requirement + Test			Result - Remark		Verdict
Terminal	B	Heavy Power Co., Ltd	PA30	450V, T110	EN 60998-1 EN 60998-2-1	VDE 40026745
Screwless terminal	C	Yuyao sineyi electronic technology co., ltd	2060-402	320V,9A, T260	IEC 60598-1 IEC 60598-2-3	Test with appliance
Terminal blocks	B	Yuyao sineyi electronic technology co., ltd	GST18	450V,16A, T110	EN 60998-1 EN 60998-2-1 EN 61984	TUV B 15 09 92724 002
Connector Installation couplers	B	Yuyao sineyi Electronic Technology Co.,LTD	M29-3	450Vac 16A 4kV	EN 60998-1 EN 60998-2-1 EN 61984	TUV B 15 09 92724 002
Connector Installation couplers	B	Foshan Ojun Electronic Technology Co.,Ltd	M29-3	450Vac 16A 4kV	EN 60998-1 EN 60998-2-1 EN 61984	TUV B 094 998 0005
Gland	C	AVC INDUSTRIAL CORP	MG16AST	M16 x1,5	IEC 60598-1 IEC 60598-2-3	Test with appliance
Gland	C	AVC INDUSTRIAL CORP	MG20AST	M20 x1,5	IEC 60598-1 IEC 60598-2-3	Test with appliance
Glass	C	HUZHOU TIANSHI GLASS PRODUCTS CO.,LTD	--	-50-250°C, ΔT200°C	IEC 60598-1 IEC 60598-2-3	Test with appliance
Internal wire	C	Shanghai Shenyu an High Temperature Wire Co.Ltd	AF200X	0,5mm ² /0,75mm ²	IEC 60598-1 IEC 60598-2-3	Test with appliance
Internal wire	C	DONGGUAN CHENG XING ELECTRONIC CO LTD	1672	300V, 16AWG	IEC 60598-1 IEC 60598-2-3	Test with appliance
SPD	B	Shanghai Qiyu Optoelectronics Technology Co., Ltd.	QR-SPD06-10	10KV, IP20	IEC 61643-11	R 50391531
(Alternative)	D	ShangHai Boarden Industrial Co.,Ltd	BSP2L10RPT	10KV, IP65	IEC 61643-11	R 50420117
Heat-shrinkable tube	C	Shenzhen Woer Heat-Shrinkable Material Co., Ltd.	RSFR-H	600V, 125°C	IEC 60598-1 IEC 60598-2-3	Test with appliance UL E203950
When the internal wire couldn't meet the cross-sectional requirement of terminal block, the end of that should be covered with a tight copper cap.						

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
<p>Supplementary information:</p> <p>¹⁾ Provided evidence ensures the agreed level of compliance. See OD-CB2039.</p> <p>The codes above have the following meaning:</p> <p>A - The component is replaceable with another one, also certified, with equivalent characteristics</p> <p>B - The component is replaceable if authorised by the test house</p> <p>C - Integrated component tested together with the appliance</p> <p>D - Alternative component</p>			

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 2	TABLE: Thermal tests of Section 12	P
----------------	---	----------

	Type reference	EL-SL09(4)-280	¾
	Lamp used.....	As delivered	¾
	Lamp control gear used	Electronic LED driver	¾
	Mounting position of luminaire.....	Normal position	¾
	Supply wattage (W)	280,95	¾
	Supply current (A).....	1,16	¾
	Temperatures in test 1 - 4 below are corrected for ta (°C)	50	¾
	- abnormal operating mode	Short-circuit output of LED controlgear	¾
1.12 (12.4)	- test 1: rated voltage	240 V	¾
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	1,06 x 240 = 254,4 V	¾
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage	N/A	¾
	Through wiring or looping-in wiring loaded by a current of A during the test	N/A	¾
1.12 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	1,1 x 240 = 264 V	¾

Temperature measurements (°C)

Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
terminal	50	¾	71,1-10	¾	110	¾	¾
Internal wire	50	¾	74,5-10	¾	90	¾	¾
LED driver tc	50	94,51-10	¾	¾	90	72,4	100
Power cord	50	¾	71,7-10	¾	90	¾	¾
Mounting surface	50	¾	70,7-10	¾	90	55,6	130
Enclosure(metal)	50	¾	62,1-10	¾	Ref.	¾	¾
SPD	50	¾	68,4-10	¾	90	¾	¾

Supplementary information: N/A

	Type reference	EL-SL18LA-160	¾
--	----------------------	---------------	---

IEC 60598-2-3							
Clause	Requirement + Test	Result - Remark	Verdict				
	Lamp used.....:	As delivered	¾				
	Lamp control gear used	Electronic LED driver	¾				
	Mounting position of luminaire.....:	Normal position	¾				
	Supply wattage (W)	156,85	¾				
	Supply current (A).....:	0,65	¾				
	Temperatures in test 1 - 4 below are corrected for ta (°C)	50	¾				
	- abnormal operating mode.....:	Short-circuit output of LED controlgear	¾				
1.12 (12.4)	- test 1: rated voltage	240 V	¾				
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	1,06 x 240 = 254,4 V	¾				
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage	N/A	¾				
	Through wiring or looping-in wiring loaded by a current of A during the test	N/A	¾				
1.12 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	1,1 x 240 = 264 V	¾				
Temperature measurements (°C)							
Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
terminal	50	¾	71,9-10	¾	110	¾	¾
Internal wire	50	¾	92,6-10	¾	90	¾	¾
LED driver tc	50	87,2-10	¾	¾	90	68,9	100
Power cord	50	¾	77,4-10	¾	90	¾	¾
Mounting surface	50	¾	68,1-10	¾	90	54,8	130
Enclosure(metal)	50	¾	70,6-10	¾	Ref.	¾	¾
Electro-mechanical contactor	50	¾	69,9-10	¾	85	¾	¾
Connector on PCB	50	¾	89,2-10	¾	Ref.		
SPD	50	¾	71,2-10	¾	90		
Supplementary information: N/A							
	Type reference	EL-SL18LB-120					¾
	Lamp used.....:	As delivered					¾
	Lamp control gear used	Electronic LED driver					¾

IEC 60598-2-3							
Clause	Requirement + Test	Result - Remark	Verdict				
	Mounting position of luminaire.....:	Normal position	¾				
	Supply wattage (W)	120,65	¾				
	Supply current (A).....:	0,499	¾				
	Temperatures in test 1 - 4 below are corrected for ta (°C)	50	¾				
	- abnormal operating mode.....:	Short-circuit output of LED controlgear	¾				
1.12 (12.4)	- test 1: rated voltage	240 V	¾				
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	1,06 x 240 = 254,4 V	¾				
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage	N/A	¾				
	Through wiring or looping-in wiring loaded by a current of A during the test	N/A	¾				
1.12 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	1,1 x 240 = 264 V	¾				
Temperature measurements (°C)							
Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
terminal	50	¾	61,1-10	¾	110	¾	¾
Internal wire	50	¾	63,3-10	¾	90	¾	¾
LED driver tc	50	68,9-10	¾	¾	90	56,9	100
Power cord	50	¾	59,4-10	¾	90	¾	¾
Mounting surface	50	¾	57,3-10	¾	90	52,8	130
Enclosure(metal)	50	¾	62,1-10	¾	Ref.	¾	¾
SPD	50	¾	65,2-10	¾	90	¾	¾
Supplementary information: N/A							
	Type reference	EL-SL18LB-120				¾	
	Lamp used.....:	As delivered				¾	
	Lamp control gear used	Electronic LED driver				¾	
	Mounting position of luminaire.....:	Normal position				¾	
	Supply wattage (W)	120,65				¾	
	Supply current (A).....:	0,499				¾	
	Temperatures in test 1 - 4 below are corrected for ta (°C)	50				¾	

IEC 60598-2-3							
Clause	Requirement + Test				Result - Remark		Verdict
	- abnormal operating mode.....:				Short-circuit output of LED controlgear		¾
1.12 (12.4)	- test 1: rated voltage				240 V		¾
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current				1,06 x 240 = 254,4 V		¾
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage				N/A		¾
	Through wiring or looping-in wiring loaded by a current of A during the test				N/A		¾
1.12 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current				1,1 x 240 = 264 V		¾
Temperature measurements (°C)							
Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
terminal	50	¾	61,1-10	¾	110	¾	¾
Internal wire	50	¾	63,3-10	¾	90	¾	¾
LED driver tc	50	68,9-10	¾	¾	90	56,9	100
Power cord	50	¾	59,4-10	¾	90	¾	¾
Mounting surface	50	¾	57,3-10	¾	90	52,8	130
Enclosure(metal)	50	¾	62,1-10	¾	Ref.	¾	¾
SPD	50	¾	65,2-10	¾	90	¾	¾
Supplementary information: N/A							

	Type reference	EL-SL18MB-20	¾
	Lamp used.....	As delivered	¾
	Lamp control gear used	Electronic LED driver	¾
	Mounting position of luminaire.....	Normal position	¾
	Supply wattage (W)	21,17	¾
	Supply current (A).....	0,13	¾
	Temperatures in test 1 - 4 below are corrected for ta (°C)	50	¾
	- abnormal operating mode.....:	Short-circuit output of LED controlgear	¾
1.12 (12.4)	- test 1: rated voltage	240 V	¾
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	1,06 x 240 = 254,4 V	¾

IEC 60598-2-3							
Clause	Requirement + Test				Result - Remark		Verdict
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage:				N/A		¾
	Through wiring or looping-in wiring loaded by a current of A during the test:				N/A		¾
1.12 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current				1,1 x 240 = 264 V		¾
Temperature measurements (°C)							
Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
terminal	50	¾	57,4-10	¾	110	¾	¾
Internal wire	50	¾	58,3-10	¾	180	¾	¾
LED driver tc	50	71,6-10	¾	¾	80	66,8	100
Power cord	50	¾	56,7-10	¾	90	¾	¾
Mounting surface	50	¾	58,1-10	¾	90	52,9	130
Enclosure(metal)	50	¾	60,2-10	¾	Ref.	¾	¾
Electro-mechanical contactor	50	¾	62,1-10	¾	Ref.	¾	¾
SPD	50	¾	64,6-10	¾	90	¾	¾
Supplementary information: N/A							

	Type reference	EL-SL08(2)-120	¾
	Lamp used.....	As delivered	¾
	Lamp control gear used	Electronic LED driver	¾
	Mounting position of luminaire.....	Normal position	¾
	Supply wattage (W)	121,08	¾
	Supply current (A).....	0,501	¾
	Temperatures in test 1 - 4 below are corrected for ta (°C)	50	¾
	- abnormal operating mode	Short-circuit output of LED controlgear	¾
1.12 (12.4)	- test 1: rated voltage	240 V	¾
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	1,06 x 240 = 254,4 V	¾
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage	N/A	¾
	Through wiring or looping-in wiring loaded by a current of A during the test	N/A	¾

IEC 60598-2-3							
Clause	Requirement + Test				Result - Remark		Verdict
1.12 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current				1,1 x 240 = 264 V		¾
Temperature measurements (°C)							
Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
terminal	50	¾	62,6-10	¾	110	¾	¾
Internal wire	50	¾	64,1-10	¾	90	¾	¾
LED driver tc	50	70,2-10	¾	¾	90	59,2	100
Power cord	50	¾	60,3-10	¾	90	¾	¾
Mounting surface	50	¾	57,8-10	¾	90	53,1	130
Enclosure(metal)	50	¾	62,9-10	¾	Ref.	¾	¾
SPD	50	¾	58,7-10	¾	90	¾	¾
Supplementary information: N/A							

	Type reference	EL-SL68(L)-240	¾
	Lamp used.....	As delivered	¾
	Lamp control gear used	Electronic LED driver	¾
	Mounting position of luminaire.....	Normal position	¾
	Supply wattage (W)	239,59	¾
	Supply current (A).....	0,963	¾
	Temperatures in test 1 - 4 below are corrected for ta (°C)	50	¾
	- abnormal operating mode	Short-circuit output of LED controlgear	¾
1.12 (12.4)	- test 1: rated voltage	240 V	¾
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	1,06 x 240 = 254,4 V	¾
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage	N/A	¾
	Through wiring or looping-in wiring loaded by a current of A during the test	N/A	¾
1.12 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	1,1 x 240 = 264 V	¾
Temperature measurements (°C)			
Part	Ambient	Cl. 12.4 – normal	Cl. 12.5 – abnormal

IEC 60598-2-3							
Clause	Requirement + Test			Result - Remark			Verdict
		test 1	test 2	test 3	limit	test 4	limit
Terminal	50	$\frac{3}{4}$	89,4-10	$\frac{3}{4}$	110	$\frac{3}{4}$	$\frac{3}{4}$
Internal wire	50	$\frac{3}{4}$	72,1-10	$\frac{3}{4}$	90	$\frac{3}{4}$	$\frac{3}{4}$
tc	50	96,2-10	$\frac{3}{4}$	$\frac{3}{4}$	90	73,3	100
Power cord	50	$\frac{3}{4}$	53,9-10	$\frac{3}{4}$	90	$\frac{3}{4}$	$\frac{3}{4}$
SPD	50	$\frac{3}{4}$	72,8-10	$\frac{3}{4}$	90	$\frac{3}{4}$	$\frac{3}{4}$
Mounting surface	50	$\frac{3}{4}$	55,7-10	$\frac{3}{4}$	90	52,1	130
Electro-mechanical contactor	50	$\frac{3}{4}$	67,9-10	$\frac{3}{4}$	Ref.	$\frac{3}{4}$	$\frac{3}{4}$
Screwless terminal	50	$\frac{3}{4}$	64,3-10	$\frac{3}{4}$	85	$\frac{3}{4}$	$\frac{3}{4}$
Supplementary information: N/A							

	Type reference	EL-SL68(L)-240	$\frac{3}{4}$
	Lamp used.....	As delivered	$\frac{3}{4}$
	Lamp control gear used	Electronic LED driver	$\frac{3}{4}$
	Mounting position of luminaire.....	Normal position	$\frac{3}{4}$
	Supply wattage (W)	236,24	$\frac{3}{4}$
	Supply current (A).....	0,951	$\frac{3}{4}$
	Temperatures in test 1 - 4 below are corrected for t_a (°C)	50	$\frac{3}{4}$
	- abnormal operating mode.....	Short-circuit output of LED controlgear	$\frac{3}{4}$
1.12 (12.4)	- test 1: rated voltage	240 V	$\frac{3}{4}$
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	$1,06 \times 240 = 254,4 \text{ V}$	$\frac{3}{4}$
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage	N/A	$\frac{3}{4}$
	Through wiring or looping-in wiring loaded by a current of A during the test	N/A	$\frac{3}{4}$
1.12 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	$1,1 \times 240 = 264 \text{ V}$	$\frac{3}{4}$

Temperature measurements (°C)

Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
Terminal	50	$\frac{3}{4}$	94,3-10	$\frac{3}{4}$	110	$\frac{3}{4}$	$\frac{3}{4}$
Internal wire	50	$\frac{3}{4}$	77,2-10	$\frac{3}{4}$	200	$\frac{3}{4}$	$\frac{3}{4}$

IEC 60598-2-3							
Clause	Requirement + Test			Result - Remark			Verdict
tc	50	99,4-10	$\frac{3}{4}$	$\frac{3}{4}$	90	71,2	100
Power cord	50	$\frac{3}{4}$	52,2-10	$\frac{3}{4}$	90	$\frac{3}{4}$	$\frac{3}{4}$
SPD	50	$\frac{3}{4}$	77,7-10	$\frac{3}{4}$	90	$\frac{3}{4}$	$\frac{3}{4}$
Mounting surface	50	$\frac{3}{4}$	55,4-10	$\frac{3}{4}$	90	53,4	130
Electro-mechanical contactor	50	$\frac{3}{4}$	71,4-10	$\frac{3}{4}$	85	$\frac{3}{4}$	$\frac{3}{4}$
Screwless terminal	50	$\frac{3}{4}$	65,9-10	$\frac{3}{4}$	85	$\frac{3}{4}$	$\frac{3}{4}$
Supplementary information: N/A							

	Type reference	EL-SL68(L)-240	$\frac{3}{4}$
	Lamp used.....	As delivered	$\frac{3}{4}$
	Lamp control gear used	Electronic LED driver	$\frac{3}{4}$
	Mounting position of luminaire.....	Normal position	$\frac{3}{4}$
	Supply wattage (W)	242,8	$\frac{3}{4}$
	Supply current (A).....	0,977	$\frac{3}{4}$
	Temperatures in test 1 - 4 below are corrected for ta (°C)	50	$\frac{3}{4}$
	- abnormal operating mode	Short-circuit output of LED controlgear	$\frac{3}{4}$
1.12 (12.4)	- test 1: rated voltage	240 V	$\frac{3}{4}$
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	1,06 x 240 = 254,4 V	$\frac{3}{4}$
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage	N/A	$\frac{3}{4}$
	Through wiring or looping-in wiring loaded by a current of A during the test	N/A	$\frac{3}{4}$
1.12 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	1,1 x 240 = 264 V	$\frac{3}{4}$

Temperature measurements (°C)

Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
Terminal	50	$\frac{3}{4}$	86,6-10	$\frac{3}{4}$	110	$\frac{3}{4}$	$\frac{3}{4}$
Internal wire	50	$\frac{3}{4}$	70,9-10	$\frac{3}{4}$	200	$\frac{3}{4}$	$\frac{3}{4}$
tc	50	98,5-10	$\frac{3}{4}$	$\frac{3}{4}$	90	73,2	100
Power cord	50	$\frac{3}{4}$	69,7-10	$\frac{3}{4}$	90	$\frac{3}{4}$	$\frac{3}{4}$
SPD	50	$\frac{3}{4}$	79,6-10	$\frac{3}{4}$	90	$\frac{3}{4}$	$\frac{3}{4}$

IEC 60598-2-3							
Clause	Requirement + Test			Result - Remark			Verdict
Mounting surface	50	$\frac{3}{4}$	65,5-10	$\frac{3}{4}$	90	55,4	130
Electro-mechanical contactor	50	$\frac{3}{4}$	71,1-10	$\frac{3}{4}$	85	$\frac{3}{4}$	$\frac{3}{4}$
Screwless terminal	50	$\frac{3}{4}$	67,3-10	$\frac{3}{4}$	85	$\frac{3}{4}$	$\frac{3}{4}$
Supplementary information: N/A							

	Type reference	EL-SL68(S)-50	$\frac{3}{4}$
	Lamp used.....	As delivered	$\frac{3}{4}$
	Lamp control gear used	Electronic LED driver	$\frac{3}{4}$
	Mounting position of luminaire.....	Normal position	$\frac{3}{4}$
	Supply wattage (W)	51,01	$\frac{3}{4}$
	Supply current (A).....	0,24	$\frac{3}{4}$
	Temperatures in test 1 - 4 below are corrected for t_a (°C)	50	$\frac{3}{4}$
	- abnormal operating mode	Short-circuit output of LED controlgear	$\frac{3}{4}$
1.12 (12.4)	- test 1: rated voltage	240 V	$\frac{3}{4}$
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	$1,06 \times 240 = 254,4 \text{ V}$	$\frac{3}{4}$
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage	N/A	$\frac{3}{4}$
	Through wiring or looping-in wiring loaded by a current of A during the test	N/A	$\frac{3}{4}$
1.12 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	$1,1 \times 240 = 264 \text{ V}$	$\frac{3}{4}$

Temperature measurements (°C)

Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
Terminal	50	$\frac{3}{4}$	69,0-10	$\frac{3}{4}$	110	$\frac{3}{4}$	$\frac{3}{4}$
Internal wire	50	$\frac{3}{4}$	64,4-10	$\frac{3}{4}$	200	$\frac{3}{4}$	$\frac{3}{4}$
t_c	50	76,7-10	$\frac{3}{4}$	$\frac{3}{4}$	90	67,2	100
Power cord	50	$\frac{3}{4}$	54,9-10	$\frac{3}{4}$	90	$\frac{3}{4}$	$\frac{3}{4}$
SPD	50	$\frac{3}{4}$	63,9-10	$\frac{3}{4}$	90	$\frac{3}{4}$	$\frac{3}{4}$
Mounting surface	50	$\frac{3}{4}$	55,4-10	$\frac{3}{4}$	90	51,9	130
Electro-mechanical contactor	50	$\frac{3}{4}$	61,2-10	$\frac{3}{4}$	85	$\frac{3}{4}$	$\frac{3}{4}$
Screwless terminal	50	$\frac{3}{4}$	59,5-10	$\frac{3}{4}$	85	$\frac{3}{4}$	$\frac{3}{4}$

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict

Supplementary information: N/A

	Type reference	EL-SL68(S)-50	¾
	Lamp used.....	As delivered	¾
	Lamp control gear used	Electronic LED driver	¾
	Mounting position of luminaire.....	Normal position	¾
	Supply wattage (W)	51,01	¾
	Supply current (A).....	0,24	¾
	Temperatures in test 1 - 4 below are corrected for ta (°C)	50	¾
	- abnormal operating mode	Short-circuit output of LED controlgear	¾
1.12 (12.4)	- test 1: rated voltage	240 V	¾
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	1,06 x 240 = 254,4 V	¾
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage	N/A	¾
	Through wiring or looping-in wiring loaded by a current of A during the test	N/A	¾
1.12 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	1,1 x 240 = 264 V	¾

Temperature measurements (°C)

Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
Terminal	50	¾	69,7-10	¾	110	¾	¾
Internal wire	50	¾	65,8-10	¾	200	¾	¾
tc	50	76,4-10	¾	¾	90	65,4	100
Power cord	50	¾	54,8-10	¾	90	¾	¾
SPD	50	¾	64,5-10	¾	90	¾	¾
Mounting surface	50	¾	55,2-10	¾	90	52,1	130
Electro-mechanical contactor	50	¾	60,8-10	¾	85	¾	¾
Screwless terminal	50	¾	58,6-10	¾	85	¾	¾

Supplementary information: N/A

	Type reference	EL-SL68(L)-200	¾
--	----------------------	----------------	---

IEC 60598-2-3							
Clause	Requirement + Test				Result - Remark		Verdict
	Lamp used.....:				As delivered		¾
	Lamp control gear used				Electronic LED driver		¾
	Mounting position of luminaire.....:				Normal position		¾
	Supply wattage (W)				198,9		¾
	Supply current (A).....:				0,8		¾
	Temperatures in test 1 - 4 below are corrected for ta (°C)				50		¾
	- abnormal operating mode.....:				Short-circuit output of LED controlgear		¾
1.12 (12.4)	- test 1: rated voltage				240 V		¾
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current				1,06 x 240 = 254,4 V		¾
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage				N/A		¾
	Through wiring or looping-in wiring loaded by a current of A during the test				N/A		¾
1.12 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current				1,1 x 240 = 264 V		¾
Temperature measurements (°C)							
Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
Terminal	50	¾	78,5-10	¾	110	¾	¾
Internal wire	50	¾	78,1-10	¾	200	¾	¾
tc	50	86,7-10	¾	¾	90	71,8	100
Power cord	50	¾	53,7-10	¾	90	¾	¾
SPD	50	¾	67,8-10	¾	90	¾	¾
Mounting surface	50	¾	63,6-10	¾	90	52,1	130
Electro-mechanical contactor	50	¾	66,5-10	¾	85	¾	¾
Screwless terminal	50	¾	64,0-10	¾	85	¾	¾
Supplementary information: N/A							

	Type reference	EL-SL68(Mini)-40	¾
	Lamp used.....:	As delivered	¾
	Lamp control gear used	Electronic LED driver	¾
	Mounting position of luminaire.....:	Normal position	¾

IEC 60598-2-3							
Clause	Requirement + Test				Result - Remark		Verdict
	Supply wattage (W):				41,28		¾
	Supply current (A).....:				0,187		¾
	Temperatures in test 1 - 4 below are corrected for ta (°C):				50		¾
	- abnormal operating mode.....:				Short-circuit output of LED controlgear		¾
1.12 (12.4)	- test 1: rated voltage:				240 V		¾
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current:				1,06 x 240 = 254,4 V		¾
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage:				N/A		¾
	Through wiring or looping-in wiring loaded by a current of A during the test:				N/A		¾
1.12 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current:				1,1 x 240 = 264 V		¾
Temperature measurements (°C)							
Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
Terminal	50	¾	74,5-10	¾	110	¾	¾
Internal wire	50	¾	65,3-10	¾	200	¾	¾
tc	50	70,5-10	¾	¾	90	62,8	100
Power cord	50	¾	50,7-10	¾	90	¾	¾
SPD	50	¾	70,3-10	¾	90	¾	¾
Mounting surface	50	¾	52,3-10	¾	90	50,7	130
Electro-mechanical contactor	50	¾	57,4-10	¾	85	¾	¾
Screwless terminal	50	¾	55,3-10	¾	85	¾	¾
Supplementary information: N/A							

	Type reference	EL-SL11(M)-100	¾
	Lamp used.....	As delivered	¾
	Lamp control gear used	Electronic LED driver	¾
	Mounting position of luminaire.....	Normal position	¾
	Supply wattage (W)	99,28	¾
	Supply current (A).....	0,407	¾

IEC 60598-2-3							
Clause	Requirement + Test				Result - Remark		Verdict
	Temperatures in test 1 - 4 below are corrected for t_a (°C)				50		¾
	- abnormal operating mode				Short-circuit output of LED controlgear		¾
1.12 (12.4)	- test 1: rated voltage				240 V		¾
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current				1,06 x 240 = 254,4 V		¾
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage				N/A		¾
	Through wiring or looping-in wiring loaded by a current of A during the test				N/A		¾
1.12 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current				1,1 x 240 = 264 V		¾
Temperature measurements (°C)							
Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
Supply cord	50	¾	59,5-10	¾	90	¾	¾
SPD	50	¾	54,5-10	¾	Ref.	¾	¾
Internal wire (hottest)	50	¾	65,7-10	¾	90	¾	¾
Tc of LED driver	50	76,2-10	¾	¾	90	¾	¾
Heat-shrinkable tube	50	¾	67,3-10	¾	125	¾	¾
Lens	50	¾	100,6-10	¾	Ref.	¾	¾
Wire connector	50	¾	64,8-10	¾	Ref.	¾	¾
Mounting surface	50	¾	54,5-10	¾	90	¾	¾
Supplementary information: N/A							
	Type reference				EL-SL20A(L)-100		¾
	Lamp used.....				As delivered		¾
	Lamp control gear used				Electronic LED driver		¾
	Mounting position of luminaire.....				Normal position		¾
	Supply wattage (W)				105,54		¾
	Supply current (A).....				0,431		¾
	Temperatures in test 1 - 4 below are corrected for t_a (°C)				50		¾

IEC 60598-2-3							
Clause	Requirement + Test				Result - Remark		Verdict
	- abnormal operating mode.....:				Short-circuit output of LED controlgear		¾
1.12 (12.4)	- test 1: rated voltage				240 V		¾
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current				1,06 x 240 = 254,4 V		¾
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage				N/A		¾
	Through wiring or looping-in wiring loaded by a current of A during the test				N/A		¾
1.12 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current				1,1 x 240 = 264 V		¾
Temperature measurements (°C)							
Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
Supply cord	50	¾	58,3-10	¾	90	¾	¾
SPD	50	¾	60,4-10	¾	Ref.	¾	¾
Internal wire (hottest)	50	¾	66,3-10	¾	90	¾	¾
Tc of LED driver	50	76,6-10	¾	¾	90	¾	¾
Heat-shrinkable tube	50	¾	63,8-10	¾	125	¾	¾
Lens	50	¾	96,4-10	¾	Ref.	¾	¾
Wire connector	50	¾	61,4-10	¾	Ref.	¾	¾
Mounting surface	50	¾	52,3-10	¾	90	¾	¾
Supplementary information: N/A							

	Type reference	EL-GL01-80	¾
	Lamp used.....	As delivered	¾
	Lamp control gear used	Electronic LED driver	¾
	Mounting position of luminaire.....	Normal position	¾
	Supply wattage (W)	92,91	¾
	Supply current (A).....	0,373	¾
	Temperatures in test 1 - 4 below are corrected for ta (°C)	50	¾
	- abnormal operating mode	Short-circuit output of LED controlgear	¾
1.12 (12.4)	- test 1: rated voltage	240 V	¾

IEC 60598-2-3							
Clause	Requirement + Test				Result - Remark		Verdict
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current				1,06 x 240 = 254,4 V		¾
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage				N/A		¾
	Through wiring or looping-in wiring loaded by a current of A during the test				N/A		¾
1.12 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current				1,1 x 240 = 264 V		¾
Temperature measurements (°C)							
Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
Terminal for supply cord	50	¾	61,6-10	¾	110	¾	¾
Supply cord	50	¾	61,4-10	¾	90	¾	¾
SPD	50	¾	66,4-10	¾	Ref.	¾	¾
Internal wire (hottest)	50	¾	76,0-10	¾	90	¾	¾
Tc of LED driver	50	84,2-10	¾	¾	90	¾	¾
Heat-shrinkable tube	50	¾	72,1-10	¾	125	¾	¾
Lens	50	¾	87,8-10	¾	Ref.	¾	¾
Wire connector	50	¾	64,8-10	¾	Ref.	¾	¾
Connector for wire lead to LED module	50	¾	75,9-10	¾	Ref.	¾	¾
Mounting surface	50	¾	53,4-10	¾	90	¾	¾
Supplementary information: N/A							
	Type reference				EL-SL58-80		¾
	Lamp used.....				As delivered		¾
	Lamp control gear used				Electronic LED driver		¾
	Mounting position of luminaire.....				Normal position		¾
	Supply wattage (W)				83,91		¾
	Supply current (A).....				0,396		¾
	Temperatures in test 1 - 4 below are corrected for ta (°C)				50		¾
	- abnormal operating mode.....				Short-circuit output of LED controlgear		¾
1.12 (12.4)	- test 1: rated voltage				240 V		¾

IEC 60598-2-3							
Clause	Requirement + Test				Result - Remark		Verdict
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current				1,06 x 240 = 254,4 V		¾
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage				N/A		¾
	Through wiring or looping-in wiring loaded by a current of A during the test				N/A		¾
1.12 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current				1,1 x 240 = 264 V		¾
Temperature measurements (°C)							
Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
Terminal for supply cord	50	¾	55,8-10	¾	110	¾	¾
Supply cord	50	¾	50,4-10	¾	90	¾	¾
SPD	50	¾	59,4-10	¾	Ref.	¾	¾
Internal wire (hottest)	50	¾	64,4-10	¾	90	¾	¾
Tc of LED driver	50	64,9-10	¾	¾	90	¾	¾
Heat-shrinkable tube	50	¾	66,3-10	¾	125	¾	¾
Lens	50	¾	85,9-10	¾	Ref.	¾	¾
Wire connector	50	¾	61,2-10	¾	Ref.	¾	¾
Connector on LED module	50	¾	68,9-10	¾	Ref.	¾	¾
Mounting surface	50	¾	50,9-10	¾	90	¾	¾
Supplementary information: N/A							
	Type reference				EL-SL18MA-30		¾
	Lamp used.....				As delivered		¾
	Lamp control gear used				Electronic LED driver		¾
	Mounting position of luminaire.....				Normal position		¾
	Supply wattage (W)				32,49		¾
	Supply current (A).....				0,133		¾
	Temperatures in test 1 - 4 below are corrected for ta (°C)				50		¾
	- abnormal operating mode.....				Short-circuit output of LED controlgear		¾
1.12 (12.4)	- test 1: rated voltage				240 V		¾

IEC 60598-2-3							
Clause	Requirement + Test				Result - Remark		Verdict
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current:				1,06 x 240 = 254,4 V		¾
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage:				N/A		¾
	Through wiring or looping-in wiring loaded by a current of A during the test:				N/A		¾
1.12 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current:				1,1 x 240 = 264 V		¾
Temperature measurements (°C)							
Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
Terminal for supply cord	50	¾	51,3-10	¾	110	¾	¾
Supply cord	50	¾	51,9-10	¾	90	¾	¾
SPD	50	¾	53,4-10	¾	Ref.	¾	¾
Internal wire (hottest)	50	¾	53,7-10	¾	90	¾	¾
Tc of LED driver (at 240V)	50	76,6-10	¾	¾	90	¾	¾
Heat-shrinkable tube	50	¾	54,8-10	¾	125	¾	¾
Lens	50	¾	81,3-10	¾	Ref.	¾	¾
Mounting surface	50	¾	50,1-10	¾	90	¾	¾
Supplementary information: N/A							

	Type reference	EL-SL68(M)-150	¾
	Lamp used.....	As delivered	¾
	Lamp control gear used	Electronic LED driver	¾
	Mounting position of luminaire.....	Normal position	¾
	Supply wattage (W)	152,4	¾
	Supply current (A).....	0,617	¾
	Temperatures in test 1 - 4 below are corrected for ta (°C)	50	¾
	- abnormal operating mode	Short-circuit output of LED controlgear	¾
1.12 (12.4)	- test 1: rated voltage	240 V	¾
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current	1,06 x 240 = 254,4 V	¾

IEC 60598-2-3							
Clause	Requirement + Test				Result - Remark		Verdict
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage:				N/A		¾
	Through wiring or looping-in wiring loaded by a current of A during the test:				N/A		¾
1.12 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current:				1,1 x 240 = 264 V		¾
Temperature measurements (°C)							
Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
Terminal block	50	¾	58,1	¾	110	¾	¾
Supply cord	50	¾	57,2	¾	90	¾	¾
Supply cord with stressed	50	¾	57,3	¾	75	¾	¾
SPD	50	¾	63,4	¾	Ref.	¾	¾
Internal wire (input LED driver)	50	¾	61,9	¾	90	¾	¾
Internal wire (output LED driver)	50	¾	74,4	¾	90	¾	¾
Internal wire (LED module input)	50	¾	70,4	¾	90	¾	¾
Electro-mechanical contactor	50	¾	71,0	¾	85	¾	¾
Plastic of LED module (transparency)	50	¾	96,3	¾	Ref.	¾	¾
Plastic of LED module (white)	50	¾	94,4	¾	Ref.	¾	¾
Tc of LED driver (EL-SL68(M)-150)	50	78,7	¾	¾	90	53,0	90
Tc of LED driver (EL-SL68(M)-120)	50	73,7	¾	¾	90	52,0	90
Tc of LED driver (EL-SL68(S)-100)	50	77,8	¾	¾	90	59,5	90
Tc of LED driver (EL-SL68(S)-80)	50	78,2	¾	¾	90	82,9	90
Tc of LED driver (EL-SL68(MINI)-50)	50	69,1	¾	¾	90	64,5	90
Tc of LED driver (EL-SL68(MINI)-30)	50	64,9	¾	¾	90	63,8	90
Mounting surface	50	¾	51,4	¾	90	50,4	130
Supplementary information: N/A							

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 3	Screw terminals (part of the luminaire)		N/A
(14)	SCREW TERMINALS		N/A
(14.2)	Type of terminal.....:		¾
	Rated current (A).....:		¾
(14.3.2.1)	One or more conductors		N/A
(14.3.2.2)	Special preparation		N/A
(14.3.2.3)	Terminal size		N/A
	Cross-sectional area (mm²)		¾
(14.3.3)	Conductor space (mm)		N/A
(14.4)	Mechanical tests		N/A
(14.4.1)	Minimum distance		N/A
(14.4.2)	Cannot slip out		N/A
(14.4.3)	Special preparation		N/A
(14.4.4)	Nominal diameter of thread (metric ISO thread)	M	N/A
	External wiring		N/A
	No soft metal		N/A
(14.4.5)	Corrosion		N/A
(14.4.6)	Nominal diameter of thread (mm).....:		N/A
	Torque (Nm)		N/A
(14.4.7)	Between metal surfaces		N/A
	Lug terminal		N/A
	Mantle terminal		N/A
	Pull test; pull (N)		N/A
(14.4.8)	Without undue damage		N/A

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 4	Screwless terminals (part of the luminaire)		P
(15)	SCREWLESS TERMINALS		P
(15.2)	Type of terminal.....:	Permanent connection	¾
	Rated current (A).....:	9	¾
(15.3.1)	Material		P
(15.3.2)	Clamping		P
(15.3.3)	Stop		P
(15.3.4)	Unprepared conductors		P
(15.3.5)	Pressure on insulating material		P
(15.3.6)	Clear connection method		N/A
(15.3.7)	Clamping independently		N/A
(15.3.8)	Fixed in position		P
(15.3.10)	Conductor size		P
	Type of conductor		P
(15.5.1)	Terminals internal wiring		P
(15.5.1.1)	Pull test spring-type terminals (4 N, 4 samples).....:		N/A
(15.5.1.2)	Pull test pin or tab terminals (4 N, 4 samples)		N/A
	Insertion force not exceeding 50 N		N/A
(15.5.1.2)	Permanent connections: pull-off test (20 N)		P
(15.5.2)	Electrical tests		P
	Voltage drop (mV) after 1 h (4 samples).....:	0,7	P
	Voltage drop of two inseparable joints		P
	Number of cycles:		¾
	Voltage drop (mV) after 10th alt. 25th cycle (4 samples)		N/A
	Voltage drop (mV) after 50th alt. 100th cycle (4 samples)	1,0	P
	After ageing, voltage drop (mV) after 10th alt. 25th cycle (4 samples).....:		N/A
	After ageing, voltage drop (mV) after 50th alt. 100th cycle (4 samples).....:		N/A
(15.6)	Terminals external wiring		N/A
	Terminal size and rating		N/A

IEC 60598-2-3			
Clause	Requirement + Test	Result - Remark	Verdict
(15.6.2.1)	Pull test spring-type terminals or welded connections (4 samples); pull (N)		N/A
	Pull test pin or tab terminals (4 samples); pull (N)		N/A

(15.6.3.1)	TABLE: Contact resistance test										N/A
	Voltage drop (mV) after 1 h										¾
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Voltage drop of two inseparable joints										
	Voltage drop after 10th alt. 25th cycle										
	Max. allowed voltage drop (mV)..... :										¾
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Voltage drop after 50th alt. 100th cycle										
	Max. allowed voltage drop (mV)..... :										¾
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Voltage drop after 50th alt. 100th cycle										
	Max. allowed voltage drop (mV)..... :										¾
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Continued ageing: voltage drop after 10th alt. 25th cycle										
	Max. allowed voltage drop (mV)..... :										¾
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Continued ageing: voltage drop after 50th alt. 100th cycle										
	Max. allowed voltage drop (mV)..... :										¾
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
Supplementary information:											

Appendix 1: Additional requirements of IEC 62493: 2015			
Clause	Requirement + Test	Result - Remark	Verdict
4	LIMITS		P
4.1	General		P
	Comply with Van der Hoofden test limit in 4.2.3 or inherently compliant in 4.2.2 and pass assessment procedure for intentional radiators in 4.3		P
4.2	Unintentional radiating part of lighting equipment		P
4.2.2	Lighting equipment deemed to comply with the Van der Hoofden test without testing		P
	1) electronic controlgear	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	3/4
	2) incandescent-lamp technology	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	3/4
	3) LED-light-source technology	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	3/4
	4) OLED-light-source technology	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	3/4
	5) high-pressure discharge lamp LED-light-source technologies	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	3/4
	6) low-pressure discharge lamp technologies with exposure distance ≥ 50 cm	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	3/4
	7) independent auxiliary	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	3/4
	Not fulfil any of 1-7 above subject to 4.2.3		3/4
4.2.3	Applications of limits		N/A
	Not fulfil any of 1-7 in 4.2.2 but the compliance factor F is ≤ 1		N/A
4.3	Intentional radiating part of lighting equipment Comply with one of methods in Clause 7 if intentional radiator		N/A

Appendix 2: Additional requirements of IEC/TR 62778:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

7	MEASUREMENT INFORMATION FLOW		P
7.1	Basic flow		P
	'Law of conservation of luminance' applied		P
	Use of only true luminance/radiance values		P
	In case of luminaire: The light source is operated in the luminaire under similar conditions as when tested as a component		P
	In case E_{thr} value for RG2 was established the peak value was derived from angular light distribution		N/A
7.2	Conditions for the radiance measurement		P
	Standard condition applied (200mm distance, 0,011rad field of view)		P
	Non-standard condition applied		P
7.3	Special cases (I): Replacement by a lamp or LED module of another type		N/A
	Light source is a white light source		N/A
	Evaluation done based on highest luminance		N/A
	Evaluation done based on CCT value		N/A
7.4	Special cases (II): Arrays and clusters of primary light sources		N/A
	LED package is evaluated as	<input type="checkbox"/> RG0 unlimited <input type="checkbox"/> RG1 unlimited	N/A
	E_{thr} of LED package applies to array		N/A
8	RISK GROUP CLASSIFICATION		P
	Risk group achieved:		P
	-.. Risk Group 0 unlimited	EL-SL58(S)-60 with LUMILEDS 3030, EL-SL18LA-160 with CREE, INC. chips of CX series	P
	-.. Risk Group 1 unlimited	EL-SL68(S)-50, EL-SL68-150 and EL-SL68S-100 with LUMILEDS LUXEON 3030, EL-SL18LA-160 with LUMILEDS 5050, EL-SL08(1L)-80 with CREE, INC. chips of XTE, EL-SL08(1L)-80 with CLU048 chips, EL-SL18LA-160 with OSRAM chips	P
	- E_{thr} (lx) : Distance to reach RG1 (m) :		N/A

According to the client's requirements, the measure distance for model EL-SL18LA-160 with LUMILEDS 5050 was changed to 2000mm and classified as RG0.

According to the client's requirements, the measure distance for model EL-SL68-150 with LUMILEDS

Appendix 2: Additional requirements of IEC/TR 62778:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

LUXEON 3030 was changed to 2250mm and classified as RG0.

According to the client's requirements, the measure distance for model EL-SL68(S)-100 with LUMILEDS LUXEON 3030 was changed to 2250mm and classified as RG0.

TABLE: Spectroradiometric measurement					P
Measurement performed on:		<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire			
Model number..... :		EL-SL68(S)-50 with LUMILEDS LUXEON 3030			
Test voltage (V)..... :		240			¾
Test current (mA)..... :		232			¾
Test frequency (Hz)..... :		50			¾
Ambient, t (°C)..... :		25			¾
Measurement distance		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm			¾
Source size		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small: mm			¾
Field of view		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)			¾
Item	Symb ol	Units	Result	Remark	
Correlated colour temperature	CCT	K	4102		
x/y colour coordinates			/		
Blue light hazard radiance	L _B	W/(m ² •sr ¹)	201,0	RG1	
Blue light hazard irradiance	E _B	W/m ²	5,822		
Luminance	L	cd/m ²	3,823 x 10 ⁵		
Illuminance	E	lx	11073		
Supplementary information:					

Appendix 2: Additional requirements of IEC/TR 62778:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

TABLE: Spectroradiometric measurement					P
	Measurement performed on:			<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire	
	Model number			EL-SL18LA-160 with LUMILEDS 5050 (If: 800 mA)	
	Test voltage (V)			240	¾
	Test current (mA)			-	¾
	Test frequency (Hz).....			50/60	¾
	Ambient, t (°C)			25	¾
	Measurement distance.....			<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm	¾
	Source size			<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small : mm	¾
	Field of view			<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)	¾
Item		Symbol	Units	Result	Remark
Correlated colour temperature		CCT	K	3964	
x/y colour coordinates				/	
Blue light hazard radiance		L _B	W/(m²•sr¹)	1,378 x10³	RG1
Blue light hazard irradiance		E _B	W/m²	3,143x10	
Luminance		L	cd/m²	2,783x10⁶	
Illuminance		E	lx	63471	
Supplementary information: N/A					

Appendix 2: Additional requirements of IEC/TR 62778:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

TABLE: Spectroradiometric measurement				P
	Measurement performed on:	<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire		
	Model number	EL-SL18LA-160 with LUMILEDS 5050 (If: 800 mA)		
	Test voltage (V)	240		¾
	Test current (mA)	-		¾
	Test frequency (Hz)	50/60		¾
	Ambient, t (°C)	25		¾
	Measurement distance	<input type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		¾
	Source size	<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small : mm		¾
	Field of view	<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		¾
Item	Symbol	Units	Result	Remark
Correlated colour temperature	CCT	K	3938	
x/y colour coordinates			/	
Blue light hazard radiance	L _B	W/(m ² •sr ¹)	8,063 x10	RG0
Blue light hazard irradiance	E _B	W/m ²	7,756x10 ⁻¹	
Luminance	L	cd/m ²	1,647x10 ⁵	
Illuminance	E	lx	1584	
Supplementary information:				

Appendix 2: Additional requirements of IEC/TR 62778:2014					
Clause	Requirement + Test			Result - Remark	Verdict
	TABLE: Spectroradiometric measurement				P
	Measurement performed on:		<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire		
	Model number.....		EL-SL18LA-160 with LUMILEDS 5050 (If: 160 mA)		
	Test voltage (V).....		240		¾
	Test current (mA).....		-		¾
	Test frequency (Hz)		50/60		¾
	Ambient, t (°C).....		25		¾
	Measurement distance		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		¾
	Source size		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small : mm		¾
	Field of view		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		¾
Item		Symb ol	Units	Result	Remark
Correlated colour temperature		CCT	K	6896	
x/y colour coordinates				/	
Blue light hazard radiance		L _B	W/(m²•sr¹)	3,286 x 10³	RG1
Blue light hazard irradiance		E _B	W/m²	6,642	
Luminance		L	cd/m²	3,339 x 10⁶	
Illuminance		E	lx	6749	
Supplementary information:					

Appendix 2: Additional requirements of IEC/TR 62778:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

TABLE: Spectroradiometric measurement					P
	Measurement performed on:			<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire	
	Model number.....			EL-SL58(S)-60 with LUMILEDS 3030	
	Test voltage (V).....			240	¾
	Test current (mA).....			-	¾
	Test frequency (Hz)			50/60	¾
	Ambient, t (°C).....			25	¾
	Measurement distance			<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm	¾
	Source size			<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small : mm	¾
	Field of view			<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)	¾
Item		Symbol	Units	Result	Remark
Correlated colour temperature		CCT	K	4005	
x/y colour coordinates				/	
Blue light hazard radiance		L _B	W/(m²•sr¹)	6,704 x10	RG0
Blue light hazard irradiance		E _B	W/m²	7,713	
Luminance		L	cd/m²	1,347x10 ⁵	
Illuminance		E	lx	15495	
Supplementary information: N/A					

Appendix 2: Additional requirements of IEC/TR 62778:2014					
Clause	Requirement + Test			Result - Remark	Verdict
	TABLE: Spectroradiometric measurement				P
	Measurement performed on:		<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire		
	Model number.....		EL-SL08(1L)-80 with CREE, INC. chips of XTE		
	Test voltage (V).....		240		¾
	Test current (mA).....		-		¾
	Test frequency (Hz)		50/60		¾
	Ambient, t (°C).....		25		¾
	Measurement distance		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		¾
	Source size		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small : mm		¾
	Field of view		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		¾
Item		Symb ol	Units	Result	Remark
Correlated colour temperature		CCT	K	5737	
x/y colour coordinates				/	
Blue light hazard radiance		L _B	W/(m²•sr¹)	5,958 x10³	RG1
Blue light hazard irradiance		E _B	W/m²	45,67	
Luminance		L	cd/m²	7,467x10⁶	
Illuminance		E	lx	57237	
Supplementary information: N/A					

Appendix 2: Additional requirements of IEC/TR 62778:2014			
Clause	Requirement + Test	Result - Remark	Verdict

TABLE: Spectroradiometric measurement					P
	Measurement performed on:		<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire		
	Model number.....		EL-SL08(1L)-80 with CLU048 chips		
	Test voltage (V).....		240		¾
	Test current (mA).....		-		¾
	Test frequency (Hz)		50/60		¾
	Ambient, t (°C).....		25		¾
	Measurement distance		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		¾
	Source size		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small : mm		¾
	Field of view		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		¾
Item		Symb ol	Units	Result	Remark
Correlated colour temperature		CCT	K	5599	
x/y colour coordinates				/	
Blue light hazard radiance		L _B	W/(m²•sr¹)	6,525 x10³	RG1
Blue light hazard irradiance		E _B	W/m²	34,45	
Luminance		L	cd/m²	8,92x10⁶	
Illuminance		E	lx	47089	
Supplementary information: N/A					

Appendix 2: Additional requirements of IEC/TR 62778:2014					
Clause	Requirement + Test			Result - Remark	Verdict
	TABLE: Spectroradiometric measurement				P
	Measurement performed on:		<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire		
	Model number		EL-SL18LA-160 with CREE, INC. chips of CX series		
	Test voltage (V)		240		¾
	Test current (mA)		0,68		¾
	Test frequency (Hz).....		50/60		¾
	Ambient, t (°C)		25		¾
	Measurement distance.....		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		¾
	Source size		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small: mm		¾
	Field of view		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		¾
Item		Symb ol	Units	Result	Remark
Correlated colour temperature		CCT	K	5534	
x/y colour coordinates				/	
Blue light hazard radiance		L _B	W/(m²•sr¹)	55	RG0
Blue light hazard irradiance		E _B	W/m²	10,15	
Luminance		L	cd/m²	7,147 x10⁴	
Illuminance		E	lx	26169	
Supplementary information:					

Appendix 2: Additional requirements of IEC/TR 62778:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

TABLE: Spectroradiometric measurement					P
	Measurement performed on:	<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire			
	Model number	EL-SL18LA-160 with OSRAM chips			
	Test voltage (V)	240			¾
	Test current (mA)	0,68			¾
	Test frequency (Hz)	50/60			¾
	Ambient, t (°C)	25			¾
	Measurement distance	<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm			¾
	Source size	<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small: mm			¾
	Field of view	<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)			¾
Item		Symbol	Units	Result	Remark
Correlated colour temperature		CCT	K	5883	
x/y colour coordinates				/	
Blue light hazard radiance		L _B	W/(m ² •sr ¹)	104	RG1
Blue light hazard irradiance		E _B	W/m ²	2,806	
Luminance		L	cd/m ²	1,251 x 10 ⁵	
Illuminance		E	lx	28801	
Supplementary information:					

Appendix 2: Additional requirements of IEC/TR 62778:2014					
Clause	Requirement + Test			Result - Remark	Verdict
	TABLE: Spectroradiometric measurement				P
	Measurement performed on:		<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire		
	Model number		EL-SL68-150 with LUMILEDS LUXEON 3030		
	Test voltage (V)		240		¾
	Test current (mA)		N/A		¾
	Test frequency (Hz).....		50/60		¾
	Ambient, t (°C)		25		¾
	Measurement distance.....		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		¾
	Source size		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small: mm		¾
	Field of view		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		¾
Item		Symbol	Units	Result	Remark
Correlated colour temperature		CCT	K	/	
x/y colour coordinates				/	
Blue light hazard radiance		L _B	W/(m²•sr¹)	5,794x10²	RG1
Blue light hazard irradiance		E _B	W/m²	1,323x10¹	
Luminance		L	cd/m²	1,274x10⁶	
Illuminance		E	lx	29099	
Supplementary information:					

Appendix 2: Additional requirements of IEC/TR 62778:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

TABLE: Spectroradiometric measurement					P
	Measurement performed on:	<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire			
	Model number	EL-SL68(S)-100 with LUMILEDS LUXEON 3030			
	Test voltage (V)	240			¾
	Test current (mA)	N/A			¾
	Test frequency (Hz)	50/60			¾
	Ambient, t (°C)	25			¾
	Measurement distance	<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm			¾
	Source size	<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small: mm			¾
	Field of view	<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)			¾
Item		Symbol	Units	Result	Remark
Correlated colour temperature		CCT	K	/	
x/y colour coordinates				/	
Blue light hazard radiance		L _B	W/(m ² •sr ¹)	7,006x10 ²	RG1
Blue light hazard irradiance		E _B	W/m ²	1,944x10 ¹	
Luminance		L	cd/m ²	1,488x10 ⁶	
Illuminance		E	lx	41286	
Supplementary information:					

Appendix 3: Additional requirements of IEC 62471:2006			
Clause	Requirement + Test	Result - Remark	Verdict

4	EXPOSURE LIMITS		P
4.1	General		P
	The exposure limits in this standard is not less than 0,01 ms and not more than any 8-hour period and should be used as guides in the control of exposure		P
	Detailed spectral data of a light source are generally required only if the luminance of the source exceeds $10^4 \text{ cd}\cdot\text{m}^{-2}$		P
4.3	Hazard exposure limits		P
4.3.1	Actinic UV hazard exposure limit for the skin and eye	LED lighting source	P
	The exposure limit for effective radiant exposure is $30 \text{ J}\cdot\text{m}^{-2}$ within any 8-hour period		P
	To protect against injury of the eye or skin from ultraviolet radiation exposure produced by a broadband source, the effective integrated spectral irradiance, E_s , of the light source shall not exceed the levels defined by:		P
	$E_s \cdot t = \sum_{200}^{400} \sum_t E_\lambda(\lambda, t) \cdot S_{UV}(\lambda) \cdot \Delta t \cdot \Delta \lambda \leq 30 \quad \text{J}\cdot\text{m}^{-2}$		P
	The permissible time for exposure to ultraviolet radiation incident upon the unprotected eye or skin shall be computed by:		P
	$t_{\max} = \frac{30}{E_s} \quad \text{s}$		P
4.3.2	Near-UV hazard exposure limit for eye		P
	For the spectral region 315 nm to 400 nm (UV-A) the total radiant exposure to the eye shall not exceed $10000 \text{ J}\cdot\text{m}^{-2}$ for exposure times less than 1000 s. For exposure times greater than 1000 s (approximately 16 minutes) the UV-A irradiance for the unprotected eye, E_{UVA} , shall not exceed $10 \text{ W}\cdot\text{m}^{-2}$.		P
	The permissible time for exposure to ultraviolet radiation incident upon the unprotected eye for time less than 1000 s, shall be computed by:		P
	$t_{\max} \leq \frac{10\,000}{E_{UVA}} \quad \text{s}$		P
4.3.3	Retinal blue light hazard exposure limit		P
	To protect against retinal photochemical injury from chronic blue-light exposure, the integrated spectral radiance of the light source weighted against the blue-light hazard function, $B(\lambda)$, i.e., the blue-light weighted radiance, L_B , shall not exceed the levels defined by:		P
	$L_B \cdot t = \sum_{300}^{700} \sum_t L_\lambda(\lambda, t) \cdot B(\lambda) \cdot \Delta t \cdot \Delta \lambda \leq 10^6 \quad \text{J} \cdot \text{m}^{-2} \cdot \text{sr}^{-1}$	for $t \leq 10^4 \text{ s}$ $t_{\max} = \frac{10^6}{L_B}$	N/A

Appendix 3: Additional requirements of IEC 62471:2006			
Clause	Requirement + Test	Result - Remark	Verdict
	$L_B = \sum_{300}^{700} L_{\lambda} \cdot B(\lambda) \cdot \Delta\lambda \leq 100 \quad W \cdot m^{-2} \cdot sr^{-1}$	for $t > 10^4$ s	P
4.3.4	Retinal blue light hazard exposure limit - small source		P
	Thus the spectral irradiance at the eye E_{λ} , weighted against the blue-light hazard function $B(\lambda)$ shall not exceed the levels defined by:		N/A
	$E_B \cdot t = \sum_{300}^{700} \sum_t E_{\lambda}(\lambda, t) \cdot B(\lambda) \cdot \Delta\lambda \leq 100 \quad J \cdot m^{-2}$	for $t \leq 100$ s	N/A
	$E_B = \sum_{300}^{700} E_{\lambda} \cdot B(\lambda) \cdot \Delta\lambda \leq 1 \quad W \cdot m^{-2}$	for $t > 100$ s	N/A
4.3.5	Retinal thermal hazard exposure limit		P
	To protect against retinal thermal injury, the integrated spectral radiance of the light source, L_{λ} , weighted by the burn hazard weighting function $R(\lambda)$ (from Figure 4.2 and Table 4.2), i.e., the burn hazard weighted radiance, shall not exceed the levels defined by:		P
	$L_R = \sum_{380}^{1400} L_{\lambda} \cdot R(\lambda) \cdot \Delta\lambda \leq \frac{50\,000}{\alpha \cdot t^{0,25}} \quad W \cdot m^{-2} \cdot sr^{-1}$	($10 \mu s \leq t \leq 10$ s)	P
4.3.6	Retinal thermal hazard exposure limit – weak visual stimulus		P
	For an infrared heat lamp or any near-infrared source where a weak visual stimulus is inadequate to activate the aversion response, the near infrared (780 nm to 1400 nm) radiance, L_{IR} , as viewed by the eye for exposure times greater than 10 s shall be limited to:		P
	$L_{IR} = \sum_{780}^{1400} L_{\lambda} \cdot R(\lambda) \cdot \Delta\lambda \leq \frac{6\,000}{\alpha} \quad W \cdot m^{-2} \cdot sr^{-1}$	$t > 10$ s	P
4.3.7	Infrared radiation hazard exposure limits for the eye		P
	The avoid thermal injury of the cornea and possible delayed effects upon the lens of the eye (cataractogenesis), ocular exposure to infrared radiation, E_{IR} , over the wavelength range 780 nm to 3000 nm, for times less than 1000 s, shall not exceed:		P
	$E_{IR} = \sum_{780}^{3000} E_{\lambda} \cdot \Delta\lambda \leq 18\,000 \cdot t^{-0,75} \quad W \cdot m^{-2}$	$t \leq 1000$ s	N/A
	For times greater than 1000 s the limit becomes:		P
	$E_{IR} = \sum_{780}^{3000} E_{\lambda} \cdot \Delta\lambda \leq 100 \quad W \cdot m^{-2}$	$t > 1000$ s	P
4.3.8	Thermal hazard exposure limit for the skin		
	Visible and infrared radiant exposure (380 nm to 3000 nm) of the skin shall be limited to:		P
	$E_H \cdot t = \sum_{380}^{3000} \sum_t E_{\lambda}(\lambda, t) \cdot \Delta\lambda \leq 20\,000 \cdot t^{0,25} \quad J \cdot m^{-2}$		P
5	MEASUREMENT OF LAMPS AND LAMP SYSTEMS		P

Appendix 3: Additional requirements of IEC 62471:2006			
Clause	Requirement + Test	Result - Remark	Verdict
5.1	Measurement conditions		P
	Measurement conditions shall be reported as part of the evaluation against the exposure limits and the assignment of risk classification.		P
5.1.1	Lamp ageing (seasoning)		P
	Seasoning of lamps shall be done as stated in the appropriate IEC lamp standard.		P
5.1.2	Test environment		P
	For specific test conditions, see the appropriate IEC lamp standard or in absence of such standards, the appropriate national standards or manufacturer's recommendations.		P
5.1.3	Extraneous radiation		P
	Careful checks should be made to ensure that extraneous sources of radiation and reflections do not add significantly to the measurement results.		P
5.1.4	Lamp operation		P
	Operation of the test lamp shall be provided in accordance with:		P
	– the appropriate IEC lamp standard, or		P
	– the manufacturer' s recommendation		N/A
5.1.5	Lamp system operation		P
	The power source for operation of the test lamp shall be provided in accordance with:		P
	– the appropriate IEC standard, or		P
	– the manufacturer' s recommendation		N/A
5.2	Measurement procedure		P
5.2.1	Irradiance measurements		P
	Minimum aperture diameter 7mm.		N/A
	Maximum aperture diameter 50 mm.		P
	The measurement shall be made in that position of the beam giving the maximum reading.		P
	The measurement instrument is adequate calibrated.		P
5.2.2	Radiance measurements		P
5.2.2.1	Standard method		N/A
	The measurements made with an optical system.		N/A
	The instrument shall be calibrated to read in absolute radiant power per unit receiving area and per unit solid angle to acceptance averaged over the field of view of the instrument.		N/A
5.2.2.2	Alternative method		P
	Alternatively to an imaging radiance set-up, an irradiance measurement set-up with a circular field stop placed at the source can be used to perform radiance measurements.		P
5.2.3	Measurement of source size		P
	The determination of α , the angle subtended by a source, requires the determination of the 50% emission points of the source.		P

Appendix 3: Additional requirements of IEC 62471:2006			
Clause	Requirement + Test	Result - Remark	Verdict
5.2.4	Pulse width measurement for pulsed sources		N/A
	The determination of Δt , the nominal pulse duration of a source, requires the determination of the time during which the emission is > 50% of its peak value.		N/A
5.3	Analysis methods		P
5.3.1	Weighting curve interpolations		P
	To standardize interpolated values, use linear interpolation on the log of given values to obtain intermediate points at the wavelength intervals desired.	see table 4.1	P
5.3.2	Calculations		P
	The calculation of source hazard values shall be performed by weighting the spectral scan by the appropriate function and calculating the total weighted energy.		P
5.3.3	Measurement uncertainty		N/A
	The quality of all measurement results must be quantified by an analysis of the uncertainty.	see Annex C in the norm	N/A
6	LAMP CLASSIFICATION		P
	For the purposes of this standard it was decided that the values shall be reported as follows:		P
	– for lamps intended for general lighting service, the hazard values shall be reported as either irradiance or radiance values at a distance which produces an illuminance of 500 lux, but not at a distance less than 200 mm		P
	– for all other light sources, including pulsed lamp sources, the hazard values shall be reported at a distance of 200 mm		N/A
6.1	Continuous wave lamps		P
6.1.1	Exempt Group		P
	In the except group are lamps, which does not pose any photobiological hazard. The requirement is met by any lamp that does not pose:		P
	– an actinic ultraviolet hazard (E_S) within 8-hours exposure (30000 s), nor		P
	– a near-UV hazard (E_{UVA}) within 1000 s, (about 16 min), nor		P
	– a retinal blue-light hazard (L_B) within 10000 s (about 2,8 h), nor		P
	– a retinal thermal hazard (L_R) within 10 s, nor		P
	– an infrared radiation hazard for the eye (E_{IR}) within 1000 s		P
6.1.2	Risk Group 1 (Low-Risk)		P
	In this group are lamps, which exceeds the limits for the except group but that does not pose:		P

Appendix 3: Additional requirements of IEC 62471:2006			
Clause	Requirement + Test	Result - Remark	Verdict
	– an actinic ultraviolet hazard (E_S) within 10000 s, nor		P
	– a near ultraviolet hazard (E_{UVA}) within 300 s, nor		P
	– a retinal blue-light hazard (L_B) within 100 s, nor		P
	– a retinal thermal hazard (L_R) within 10 s, nor		P
	– an infrared radiation hazard for the eye (E_{IR}) within 100 s		P
	Lamps that emit infrared radiation without a strong visual stimulus and do not pose a near-infrared retinal hazard (L_{IR}), within 100 s are in Risk Group 1.		P
6.1.3	Risk Group 2 (Moderate-Risk)		N/A
	This requirement is met by any lamp that exceeds the limits for Risk Group 1, but that does not pose:		N/A
	– an actinic ultraviolet hazard (E_S) within 1000 s exposure, nor		N/A
	– a near ultraviolet hazard (E_{UVA}) within 100 s, nor		N/A
	– a retinal blue-light hazard (L_B) within 0,25 s (aversion response), nor		N/A
	– a retinal thermal hazard (L_R) within 0,25 s (aversion response), nor		N/A
	– an infrared radiation hazard for the eye (E_{IR}) within 10 s		N/A
	Lamps that emit infrared radiation without a strong visual stimulus and do not pose a near-infrared retinal hazard (L_{IR}), within 10 s are in Risk Group 2.		N/A
6.1.4	Risk Group 3 (High-Risk)		N/A
	Lamps which exceed the limits for Risk Group 2 are in Group 3.		N/A
6.2	Pulsed lamps		
	Pulse lamp criteria shall apply to a single pulse and to any group of pulses within 0,25 s.		N/A
	A pulsed lamp shall be evaluated at the highest nominal energy loading as specified by the manufacturer.		N/A
	The risk group determination of the lamp being tested shall be made as follows:		N/A
	– a lamp that exceeds the exposure limit shall be classified as belonging to Risk Group 3 (High-Risk)		N/A
	– for single pulsed lamps, a lamp whose weighted radiant exposure or weighted radiance does is below the EL shall be classified as belonging to the Exempt Group		N/A

Appendix 3: Additional requirements of IEC 62471:2006			
Clause	Requirement + Test	Result - Remark	Verdict
	– for repetitively pulsed lamps, a lamp whose weighted radiant exposure or weighted radiance dose is below the EL, shall be evaluated using the continuous wave risk criteria discussed in clause 6.1, using time averaged values of the pulsed emission		N/A

Appendix 3: Additional requirements of IEC 62471:2006

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Table 4.1		Spectral weighting function for assessing ultraviolet hazards for skin and eye	
Wavelength [†] λ , nm	UV hazard function $S_{uv}(\lambda)$	Wavelength λ , nm	UV hazard function $S_{uv}(\lambda)$
200	0,030	313*	0,006
205	0,051	315	0,003
210	0,075	316	0,0024
215	0,095	317	0,0020
220	0,120	318	0,0016
225	0,150	319	0,0012
230	0,190	320	0,0010
235	0,240	322	0,00067
240	0,300	323	0,00054
245	0,360	325	0,00050
250	0,430	328	0,00044
254*	0,500	330	0,00041
255	0,520	333*	0,00037
260	0,650	335	0,00034
265	0,810	340	0,00028
270	1,000	345	0,00024
275	0,960	350	0,00020
280*	0,880	355	0,00016
285	0,770	360	0,00013
290	0,640	365*	0,00011
295	0,540	370	0,000093
297*	0,460	375	0,000077
300	0,300	380	0,000064
303*	0,120	385	0,000053
305	0,060	390	0,000044
308	0,026	395	0,000036
310	0,015	400	0,000030
[†] Wavelengths chosen are representative: other values should be obtained by logarithmic interpolation at intermediate wavelengths. * Emission lines of a mercury discharge spectrum.			

Appendix 3: Additional requirements of IEC 62471:2006

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Table 4.2	Spectral weighting functions for assessing retinal hazards from broadband optical sources		
Wavelength nm	Blue-light hazard function B (λ)	Burn hazard function R (λ)	
300	0,01		
305	0,01		
310	0,01		
315	0,01		
320	0,01		
325	0,01		
330	0,01		
335	0,01		
340	0,01		
345	0,01		
350	0,01		
355	0,01		
360	0,01		
365	0,01		
370	0,01		
375	0,01		
380	0,01	0,1	
385	0,013	0,13	
390	0,025	0,25	
395	0,05	0,5	
400	0,10	1,0	
405	0,20	2,0	
410	0,40	4,0	
415	0,80	8,0	
420	0,90	9,0	
425	0,95	9,5	
430	0,98	9,8	
435	1,00	10,0	
440	1,00	10,0	
445	0,97	9,7	
450	0,94	9,4	
455	0,90	9,0	
460	0,80	8,0	
465	0,70	7,0	
470	0,62	6,2	
475	0,55	5,5	
480	0,45	4,5	
485	0,40	4,0	
490	0,22	2,2	
495	0,16	1,6	
500-600	$10^{[(450-\lambda)/50]}$	1,0	
600-700	0,001	1,0	
700-1050		$10^{[(700-\lambda)/500]}$	
1050-1150		0,2	
1150-1200		$0,2 \cdot 10^{0,02(1150-\lambda)}$	

Appendix 3: Additional requirements of IEC 62471:2006

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

1200-1400		0,02
-----------	--	------

Table 5.4 Summary of the ELs for the surface of the skin or cornea (irradiance based values)

Hazard Name	Relevant equation	Wavelength range nm	Exposure duration sec	Limiting aperture rad (deg)	EL in terms of constant irradiance $W \cdot m^{-2}$
Actinic UV skin & eye	$E_S = \sum E_\lambda \cdot S(\lambda) \cdot \Delta\lambda$	200 – 400	< 30000	1,4 (80)	30/t
Eye UV-A	$E_{UVA} = \sum E_\lambda \cdot \Delta\lambda$	315 – 400	≤ 1000 >1000	1,4 (80)	10000/t 10
Blue-light small source	$E_B = \sum E_\lambda \cdot B(\lambda) \cdot \Delta\lambda$	300 – 700	≤ 100 >100	< 0,011	100/t 1,0
Eye IR	$E_{IR} = \sum E_\lambda \cdot \Delta\lambda$	780 – 3000	≤ 1000 >1000	1,4 (80)	18000/t ^{0,75} 100
Skin thermal	$E_H = \sum E_\lambda \cdot \Delta\lambda$	380 – 3000	< 10	2π sr	20000/t ^{0,75}

Table 5.5 Summary of the ELs for the retina (radiance based values)

Hazard Name	Relevant equation	Wavelength range nm	Exposure duration sec	Field of view radians	EL in terms of constant radiance $W \cdot m^{-2} \cdot sr^{-1}$
Blue light	$L_B = \sum L_\lambda \cdot B(\lambda) \cdot \Delta\lambda$	300 – 700	0,25 – 10 10-100 100-10000 ≥ 10000	$0,011 \cdot \sqrt{(t/10)}$ 0,011 $0,0011 \cdot \sqrt{t}$ 0,1	$10^6/t$ $10^6/t$ $10^6/t$ 100
Retinal thermal	$L_R = \sum L_\lambda \cdot R(\lambda) \cdot \Delta\lambda$	380 – 1400	< 0,25 0,25 – 10	0,0017 $0,011 \cdot \sqrt{(t/10)}$	$50000/(\alpha \cdot t^{0,25})$ $50000/(\alpha \cdot t^{0,25})$
Retinal thermal (weak visual stimulus)	$L_{IR} = \sum L_\lambda \cdot R(\lambda) \cdot \Delta\lambda$	780 – 1400	> 10	0,011	6000/α

Appendix 3: Additional requirements of IEC 62471:2006

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Table 6.1	Emission limits for risk groups of continuous wave lamps (EL-SL18LA-160 with LUMILEDS 5050 (If: 800 mA))								
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	$4,39 \times 10^{-5}$	0,003	---	0,03	---
Near UV		E_{UVA}	$W \cdot m^{-2}$	10	$3,038 \times 10^{-3}$	33	---	100	---
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	$2,124 \times 10$	10000	---	4000000	---
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	1,0*	$2,521 \times 10^{-1}$	1,0	---	400	---
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	$1,192 \times 10^3$	$28000/\alpha$	---	$71000/\alpha$	---
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	$6000/\alpha$	$3,757 \times 10^0$	$6000/\alpha$	---	$6000/\alpha$	---
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0	570	---	3200	---
* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian. ** Involves evaluation of non-GLS source Remark: EL-SL18LA-160 with LUMILEDS 5050 is RG0.									

Appendix 3: Additional requirements of IEC 62471:2006			
Clause	Requirement + Test	Result - Remark	Verdict

Table 6.1		Emission limits for risk groups of continuous wave lamps (EL-SL18LA-160 with LUMILEDS 5050 (If:160 mA))							
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	$1,1 \times 10^{-4}$	0,003	---	0,03	---
Near UV		E_{UVA}	$W \cdot m^{-2}$	10	$8,6 \times 10^{-4}$	33	---	100	---
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	19	10000	---	4000000	---
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	1,0*	N/A ($\alpha=0,061$)	1,0	---	400	---
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	$1,4 \times 10^3$	$28000/\alpha$	---	$71000/\alpha$	---
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	$6000/\alpha$	$9,8 \times 10^{-1}$	$6000/\alpha$	---	$6000/\alpha$	---
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0	570	---	3200	---
* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian. ** Involves evaluation of non-GLS source Remark: EL-SL18LA-160 with LUMILEDS 5050 is RG0.									

Appendix 3: Additional requirements of IEC 62471:2006

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Table 6.1 Emission limits for risk groups of continuous wave lamps (EL-SL58(S)-60 with LUMILEDS LUXEON 3030)									
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	$2,233 \times 10^{-5}$	0,003	---	0,03	---
Near UV		E_{UVA}	$W \cdot m^{-2}$	10	$8,247 \times 10^{-4}$	33	---	100	---
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	$1,536 \times 10$	10000	---	4000000	---
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	1,0*	$2,432 \times 10^{-1}$	1,0	---	400	---
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	$4,909 \times 10^2$	$28000/\alpha$	---	$71000/\alpha$	---
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	$6000/\alpha$	$1,015 \times 10^0$	$6000/\alpha$	---	$6000/\alpha$	---
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0	570	---	3200	---
* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian. ** Involves evaluation of non-GLS source Remark: EL-SL58(S)-60 with LUMILEDS LUXEON 3030 is RG0.									

Appendix 3: Additional requirements of IEC 62471:2006

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Table 6.1	Emission limits for risk groups of continuous wave lamps (EL-SL68(MINI)-50 with LUMILEDS LUXEON 3030)								
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	$5,86 \times 10^{-5}$	0,003	---	0,03	---
Near UV		E_{UVA}	$W \cdot m^{-2}$	10	$1,23 \times 10^{-3}$	33	---	100	---
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	21,35	10000	---	4000000	---
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	1,0*	N/A ($\alpha=0,1$)	1,0	---	400	---
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	352,5	$28000/\alpha$	---	$71000/\alpha$	---
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	$6000/\alpha$	1,184	$6000/\alpha$	---	$6000/\alpha$	---
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0	570	---	3200	---
* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian. ** Involves evaluation of non-GLS source Remark: EL-SL68(MINI)-50 with LUMILEDS LUXEON 3030 is RG0.									

Appendix 3: Additional requirements of IEC 62471:2006			
Clause	Requirement + Test	Result - Remark	Verdict

Table 6.1		Emission limits for risk groups of continuous wave lamps (EL-SL18LA-160 with CREE, INC. chips of CX series)							
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	$3,5 \times 10^{-5}$	0,003	---	0,03	---
Near UV		E_{UVA}	$W \cdot m^{-2}$	10	$1,1 \times 10^{-3}$	33	---	100	---
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	17	10000	---	4000000	---
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	1,0*	(N/A) $\alpha = 0,055$	1,0	---	400	---
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	$2,7 \times 10^3$	$28000/\alpha$	---	$71000/\alpha$	---
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	$6000/\alpha$	2,8	$6000/\alpha$	---	$6000/\alpha$	---
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0	570	---	3200	---
* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian. ** Involves evaluation of non-GLS source Remark: EL-SL18LA-160 with CREE, INC. chips of CX series is RG0.									

Appendix 3: Additional requirements of IEC 62471:2006

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Table 6.1 Emission limits for risk groups of continuous wave lamps (EL-SL18LA-160 with OSRAM chips)									
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	$1,1 \times 10^{-4}$	0,003	---	0,03	---
Near UV		E_{UVA}	$W \cdot m^{-2}$	10	$8,6 \times 10^{-4}$	33	---	100	---
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	19	10000	---	4000000	---
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	1,0*	(N/A) $\alpha = 0,061$	1,0	---	400	---
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	$1,4 \times 10^3$	$28000/\alpha$	---	$71000/\alpha$	---
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	$6000/\alpha$	0,98	$6000/\alpha$	---	$6000/\alpha$	---
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0	570	---	3200	---
<p>* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.</p> <p>** Involves evaluation of non-GLS source</p> <p>Remark: EL-SL18LA-160 with OSRAM chips is RG0.</p>									

Appendix 3: Additional requirements of IEC 62471:2006			
Clause	Requirement + Test	Result - Remark	Verdict

Table 6.1 Emission limits for risk groups of continuous wave lamps (EL-SL08(1L)-80 with CREE, INC. chips of XTE)									
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	$2,162 \times 10^{-5}$	0,003	---	0,03	---
Near UV		E_{UVA}	$W \cdot m^{-2}$	10	$3,232 \times 10^{-4}$	33	---	100	---
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	97,65	10000	---	4000000	---
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	1,0*	(N/A) $\alpha = 0,1$	1,0	---	400	---
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	$1,31 \times 10^3$	$28000/\alpha$	---	$71000/\alpha$	---
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	$6000/\alpha$	1,147	$6000/\alpha$	---	$6000/\alpha$	---
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0	570	---	3200	---
* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian. ** Involves evaluation of non-GLS source Remark: EL-SL08(1L)-80 with CREE, INC. chips of XTE is RG0.									

Appendix 3: Additional requirements of IEC 62471:2006

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Table 6.1 Emission limits for risk groups of continuous wave lamps (EL-SL08(1L)-80 with CLU048 chips)									
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	---	0,003	$2,182 \times 10^{-5}$	0,03	---
Near UV		E_{UVA}	$W \cdot m^{-2}$	10	---	33	$4,732 \times 10^{-4}$	100	---
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	---	10000	163,8	4000000	---
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	1,0*	---	1,0	(N/A) $\alpha = 0,1$	400	---
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	---	$28000/\alpha$	$2,076 \times 10^3$	$71000/\alpha$	---
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	$6000/\alpha$	---	$6000/\alpha$	$4,302 \times 10^{-1}$	$6000/\alpha$	---
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	---	570	0	3200	---
* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian. ** Involves evaluation of non-GLS source Remark: EL-SL08(1L)-80 with CLU048 chips is RG1.									

Appendix 3: Additional requirements of IEC 62471:2006

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Table 6.1 Emission limits for risk groups of continuous wave lamps (EL-SL68-150 with LUMILEDS LUXEON 3030)									
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	$1,082 \times 10^{-4}$	0,003	---	0,03	---
Near UV		E_{UVA}	$W \cdot m^{-2}$	10	$5,270 \times 10^{-3}$	33	---	100	---
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	$9,389 \times 10^1$	10000	---	4000000	---
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	1,0*	(N/A) $\alpha = 0,0782$	1,0	---	400	---
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	$2,777 \times 10^3$	$28000/\alpha$	---	$71000/\alpha$	---
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	$6000/\alpha$	$2,535 \times 10^0$	$6000/\alpha$	---	$6000/\alpha$	---
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0	570	---	3200	---
* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian. ** Involves evaluation of non-GLS source Remark: EL-SL68-150 with LUMILEDS LUXEON 3030 chips is RG0.									

Appendix 3: Additional requirements of IEC 62471:2006

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Table 6.1 Emission limits for risk groups of continuous wave lamps (EL-SL68(S)-100 with LUMILEDS LUXEON 3030)									
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	$1,981 \times 10^{-5}$	0,003	---	0,03	---
Near UV		E_{UVA}	$W \cdot m^{-2}$	10	$1,265 \times 10^{-3}$	33	---	100	---
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	$8,586 \times 10^1$	10000	---	4000000	---
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	1,0*	(N/A) $\alpha = 0,0804$	1,0	---	400	---
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	$1,911 \times 10^3$	$28000/\alpha$	---	$71000/\alpha$	---
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	$6000/\alpha$	$9,737 \times 10^0$	$6000/\alpha$	---	$6000/\alpha$	---
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0	570	---	3200	---
* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian. ** Involves evaluation of non-GLS source Remark: EL-SL68(S)-100 with LUMILEDS LUXEON 3030 chips is RG0.									

Appendix 3: Additional requirements of IEC 62471:2006			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT IEC 62471 EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES PHOTOBIOLOGICAL SAFETY OF LAMPS AND LAMPS SYSTEMS	
Differences according to	EN 62471:2008
Attachment Form No	EU_GD_IEC62471A
Attachment Originator	IMQ S.p.A.
Master Attachment	2009-07
Copyright © 2009 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.	

	CENELEC COMMON MODIFICATIONS (EN)	P
4	EXPOSURE LIMITS	P
	Contents of the whole Clause 4 of IEC 62471:2006 moved into a new informative Annex ZB	¾
	Clause 4 replaced by the following:	P
	Limits of the Artificial Optical Radiation Directive (2006/25/EC) have been applied instead of those fixed in IEC 62471:2006	P
4.1	General	P
	First paragraph deleted	¾

Appendix 3: Additional requirements of IEC 62471:2006

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Table 6.1 Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC) (EL-SL18LA-160 with LUMILEDS 5050 (If: 800 mA))									
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	$4,39 \times 10^{-5}$	---	---	---	---
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	$3,038 \times 10^{-3}$	---	---	---	---
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	$2,124 \times 10$	10000	---	4000000	---
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	$2,521 \times 10^{-1}$	1,0	---	400	---
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	$1,192 \times 10^3$	$28000/\alpha$	---	$71000/\alpha$	---
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 $0,0017 \leq \alpha \leq 0,011$	N/A				
				$6000/\alpha$ $0,011 \leq \alpha \leq 0,1$	$3,757 \times 10^0$				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0	570	---	3200	---

Appendix 3: Additional requirements of IEC 62471:2006			
Clause	Requirement + Test	Result - Remark	Verdict

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.

** Involves evaluation of non-GLS source

NOTE The action functions: see Table 4.1 and Table 4.2

The applicable aperture diameters: see 4.2.1

The limitations for the angular subtenses: see 4.2.2

The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.

Remark: EL-SL18LA-160 with LUMILEDS 5050 is RG0.

Appendix 3: Additional requirements of IEC 62471:2006			
Clause	Requirement + Test	Result - Remark	Verdict

Table 6.1		Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC) (EL-SL18LA-160 with LUMILEDS 5050 (If: 160 mA))							
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	$1,1 \times 10^{-4}$	---	---	---	---
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	$8,6 \times 10^{-4}$	---	---	---	---
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	19	10000	---	4000000	---
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	N/A ($\alpha=0,061$)	1,0	---	400	---
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	$1,4 \times 10^3$	$28000/\alpha$	---	$71000/\alpha$	---
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 $0,0017 \leq \alpha \leq 0,011$	N/A				
				$6000/\alpha$ $0,011 \leq \alpha \leq 0,1$	$9,8 \times 10^{-1}$				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0	570	---	3200	---

Appendix 3: Additional requirements of IEC 62471:2006			
Clause	Requirement + Test	Result - Remark	Verdict

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.

** Involves evaluation of non-GLS source

NOTE The action functions: see Table 4.1 and Table 4.2

The applicable aperture diameters: see 4.2.1

The limitations for the angular subtenses: see 4.2.2

The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.

Remark: EL-SL18LA-160 with LUMILEDS 5050 is RG0.

Appendix 3: Additional requirements of IEC 62471:2006

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Table 6.1		Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC) (EL-SL58(S)-60 with LUMILEDS LUXEON 3030)							
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	$2,233 \times 10^{-5}$	---	---	---	---
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	$8,247 \times 10^{-4}$	---	---	---	---
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	$1,536 \times 10$	10000	---	4000000	---
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	$2,432 \times 10^{-1}$	1,0	---	400	---
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	$4,909 \times 10^2$	$28000/\alpha$	---	$71000/\alpha$	---
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 $0,0017 \leq \alpha \leq 0,011$	N/A				
				$6000/\alpha$ $0,011 \leq \alpha \leq 0,1$	$1,015 \times 10^0$				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0	570	---	3200	---

Appendix 3: Additional requirements of IEC 62471:2006			
Clause	Requirement + Test	Result - Remark	Verdict

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.

** Involves evaluation of non-GLS source

NOTE The action functions: see Table 4.1 and Table 4.2

The applicable aperture diameters: see 4.2.1

The limitations for the angular subtenses: see 4.2.2

The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.

Remark: EL-SL58(S)-60 with LUMILEDS LUXEON 3030 is RG0.

Appendix 3: Additional requirements of IEC 62471:2006

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Table 6.1		Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC) (EL-SL68(MINI)-50 with LUMILEDS LUXEON 3030)							
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	$5,86 \times 10^{-5}$	---	---	---	---
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	$1,23 \times 10^{-3}$	---	---	---	---
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	21,35	10000	---	4000000	---
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	N/A ($\alpha=0,1$)	1,0	---	400	---
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	352,5	$28000/\alpha$	---	$71000/\alpha$	---
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 $0,0017 \leq \alpha \leq 0,011$	N/A				
				$6000/\alpha$ $0,011 \leq \alpha \leq 0,1$	1,184				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0	570	---	3200	---

Appendix 3: Additional requirements of IEC 62471:2006			
Clause	Requirement + Test	Result - Remark	Verdict

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.

** Involves evaluation of non-GLS source

NOTE The action functions: see Table 4.1 and Table 4.2

The applicable aperture diameters: see 4.2.1

The limitations for the angular subtenses: see 4.2.2

The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.

Remark: EL-SL68(MINI)-50 with LUMILEDS LUXEON 3030 is RG0.

Appendix 3: Additional requirements of IEC 62471:2006			
Clause	Requirement + Test	Result - Remark	Verdict

Table 6.1		Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC) (EL-SL18LA-160 with CREE, INC. chips of CX series)							
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	$3,5 \times 10^{-5}$	---	---	---	---
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	$1,1 \times 10^{-3}$	---	---	---	---
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	17	10000	---	4000000	---
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	(N/A) $\alpha = 0,055$	1,0	---	400	---
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	$2,7 \times 10^3$	$28000/\alpha$	---	$71000/\alpha$	---
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 $0,0017 \leq \alpha \leq 0,011$	N/A				
				$6000/\alpha$ $0,011 \leq \alpha \leq 0,1$	2,8				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0	570	---	3200	---

Appendix 3: Additional requirements of IEC 62471:2006			
Clause	Requirement + Test	Result - Remark	Verdict

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.

** Involves evaluation of non-GLS source

NOTE The action functions: see Table 4.1 and Table 4.2

The applicable aperture diameters: see 4.2.1

The limitations for the angular subtenses: see 4.2.2

The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.

Remark: EL-SL18LA-160 with CREE, INC. chips of CX series is RG0.

Appendix 3: Additional requirements of IEC 62471:2006

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Table 6.1		Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC) (EL-SL18LA-160 with OSRAM chips)							
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	$1,1 \times 10^{-4}$	---	---	---	---
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	$8,6 \times 10^{-4}$	---	---	---	---
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	19	10000	---	4000000	---
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	(N/A) $\alpha = 0,061$	1,0	---	400	---
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	$1,4 \times 10^3$	$28000/\alpha$	---	$71000/\alpha$	---
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 $0,0017 \leq \alpha \leq 0,011$	N/A				
				$6000/\alpha$ $0,011 \leq \alpha \leq 0,1$	0,98				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0	570	---	3200	---

Appendix 3: Additional requirements of IEC 62471:2006			
Clause	Requirement + Test	Result - Remark	Verdict

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.

** Involves evaluation of non-GLS source

NOTE The action functions: see Table 4.1 and Table 4.2

The applicable aperture diameters: see 4.2.1

The limitations for the angular subtenses: see 4.2.2

The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.

Remark: EL-SL18LA-160 with OSRAM chips is RG0.

Appendix 3: Additional requirements of IEC 62471:2006			
Clause	Requirement + Test	Result - Remark	Verdict

Table 6.1		Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC) (EL-SL11(M)-100 with CREE, INC. chips of XTE)							
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	$2,162 \times 10^{-5}$	---	---	---	---
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	$3,232 \times 10^{-4}$	---	---	---	---
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	97,65	10000	---	4000000	---
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	(N/A) $\alpha = 0,1$	1,0	---	400	---
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	$1,31 \times 10^3$	$28000/\alpha$	---	$71000/\alpha$	---
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 $0,0017 \leq \alpha \leq 0,011$	N/A				
				$6000/\alpha$ $0,011 \leq \alpha \leq 0,1$	1,147				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0	570	---	3200	---

Appendix 3: Additional requirements of IEC 62471:2006			
Clause	Requirement + Test	Result - Remark	Verdict

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.

** Involves evaluation of non-GLS source

NOTE The action functions: see Table 4.1 and Table 4.2

The applicable aperture diameters: see 4.2.1

The limitations for the angular subtenses: see 4.2.2

The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.

Remark: EL-SL08(1L)-80 with CREE, INC. chips of XTE is RG0.

Appendix 3: Additional requirements of IEC 62471:2006

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Table 6.1		Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC) (EL-SL08(1L)-80 with CLU048 chips)							
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	$2,182 \times 10^{-5}$	---	---	---	---
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	$4,732 \times 10^{-4}$	---	---	---	---
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	---	10000	163,8	4000000	---
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	---	1,0	(N/A) $\alpha = 0,1$	400	---
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	---	$28000/\alpha$	$2,076 \times 10^3$	$71000/\alpha$	---
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 $0,0017 \leq \alpha \leq 0,011$	N/A				
				$6000/\alpha$ $0,011 \leq \alpha \leq 0,1$	$4,302 \times 10^{-1}$				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	---	570	0	3200	---

Appendix 3: Additional requirements of IEC 62471:2006			
Clause	Requirement + Test	Result - Remark	Verdict

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.

** Involves evaluation of non-GLS source

NOTE The action functions: see Table 4.1 and Table 4.2

The applicable aperture diameters: see 4.2.1

The limitations for the angular subtenses: see 4.2.2

The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.

Remark: EL-SL08(1L)-80 with CLU048 chips is RG1.

Appendix 3: Additional requirements of IEC 62471:2006

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

Table 6.1		Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC) (EL-SL68-150 with LUMILEDS LUXEON 3030)							
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	$1,082 \times 10^{-4}$	---	---	---	---
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	$5,270 \times 10^{-3}$	---	---	---	---
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	$9,389 \times 10^1$	10000	---	4000000	---
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	(N/A) $\alpha = 0,0782$	1,0	---	400	---
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	$2,777 \times 10^3$	$28000/\alpha$	---	$71000/\alpha$	---
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 $0,0017 \leq \alpha \leq 0,011$	N/A				
				$6000/\alpha$ $0,011 \leq \alpha \leq 0,1$	$2,535 \times 10^0$				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0	570	---	3200	---

Appendix 3: Additional requirements of IEC 62471:2006			
Clause	Requirement + Test	Result - Remark	Verdict

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.

** Involves evaluation of non-GLS source

NOTE The action functions: see Table 4.1 and Table 4.2

The applicable aperture diameters: see 4.2.1

The limitations for the angular subtenses: see 4.2.2

The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.

Remark: EL-SL68-150 with LUMILEDS LUXEON 3030 chips is RG0.

Appendix 3: Additional requirements of IEC 62471:2006			
Clause	Requirement + Test	Result - Remark	Verdict

Table 6.1		Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC) (EL-SL68(S)-100 with LUMILEDS LUXEON 3030)							
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	$1,981 \times 10^{-5}$	---	---	---	---
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	$1,265 \times 10^{-3}$	---	---	---	---
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	$8,586 \times 10^1$	10000	---	4000000	---
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	(N/A) $\alpha = 0,0804$	1,0	---	400	---
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	$1,911 \times 10^3$	$28000/\alpha$	---	$71000/\alpha$	---
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 $0,0017 \leq \alpha \leq 0,011$	N/A				
				$6000/\alpha$ $0,011 \leq \alpha \leq 0,1$	$9,737 \times 10^0$				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0	570	---	3200	---

Appendix 3: Additional requirements of IEC 62471:2006			
Clause	Requirement + Test	Result - Remark	Verdict

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.

** Involves evaluation of non-GLS source

NOTE The action functions: see Table 4.1 and Table 4.2

The applicable aperture diameters: see 4.2.1

The limitations for the angular subtenses: see 4.2.2

The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.

Remark: EL-SL68(S)-100 with LUMILEDS LUXEON 3030 chips is RG0.

Appendix 4: Photograph



EL-SL08(2) series



Back side

Appendix 4: Photograph

LED controlgear



EL-SL09(4) series

Appendix 4: Photograph

Back side



Internal construction

Appendix 4: Photograph




LED controlgear



LED module

Appendix 4: Photograph

EL-SL18LA series

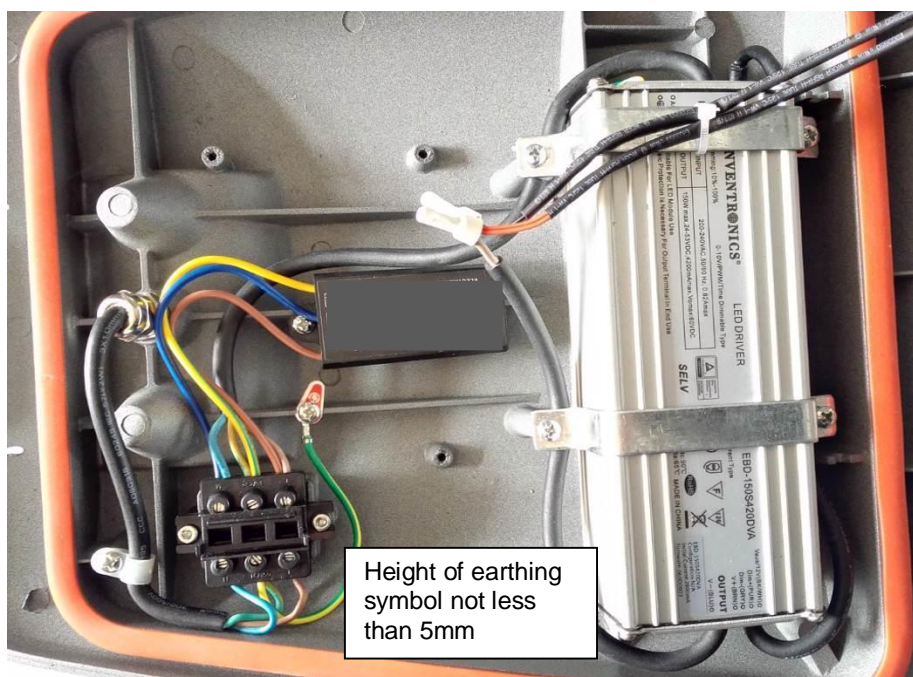

Internal construction


Appendix 4: Photograph



LED module




EL-SL18LB series

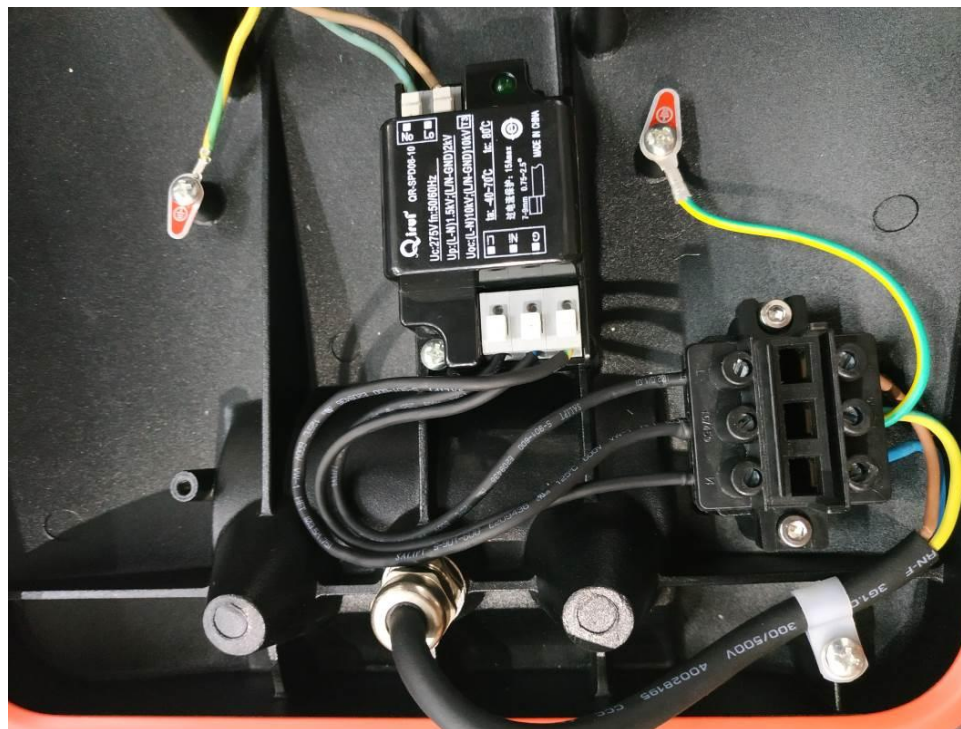Appendix 4: Photograph


Internal construction



SPD

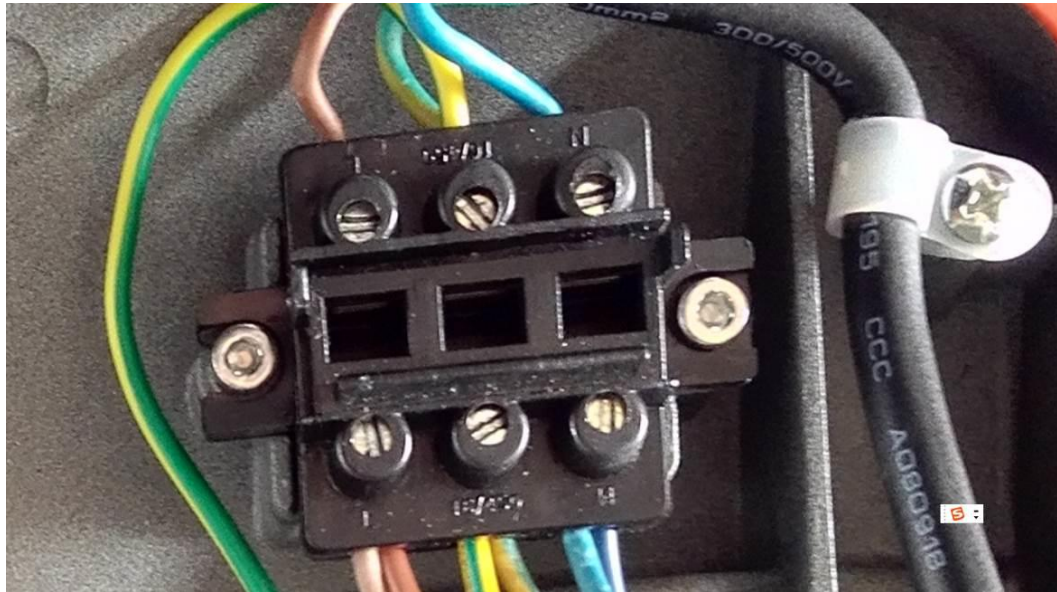Appendix 4: Photograph

Electro-mechanical contact system

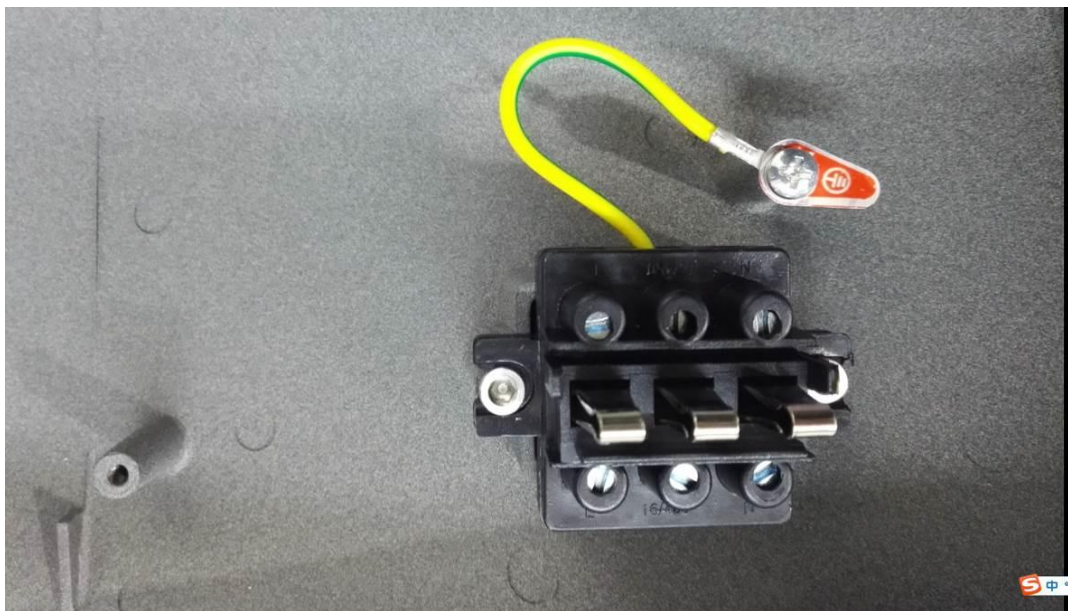

Electro-mechanical contact system


Appendix 4: Photograph

LED controlgear



Gland

Appendix 4: Photograph

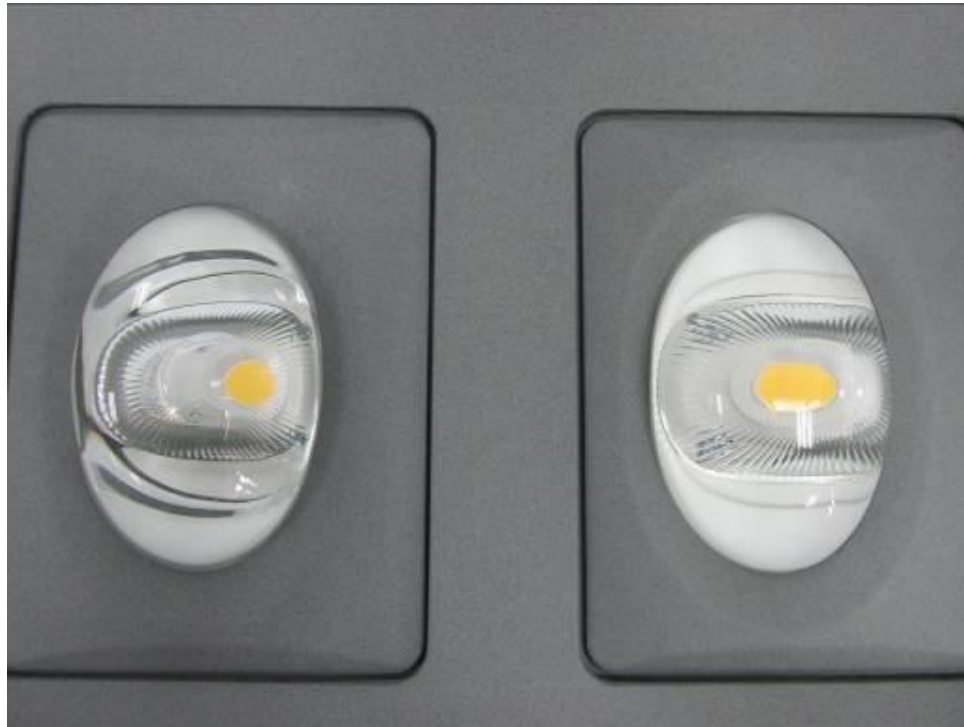

LED module



EL-SL18MB series

Appendix 4: Photograph



Back side




LED controlgear

Appendix 4: Photograph


EL-SL08(1L) series



EL-SL08(1L) series

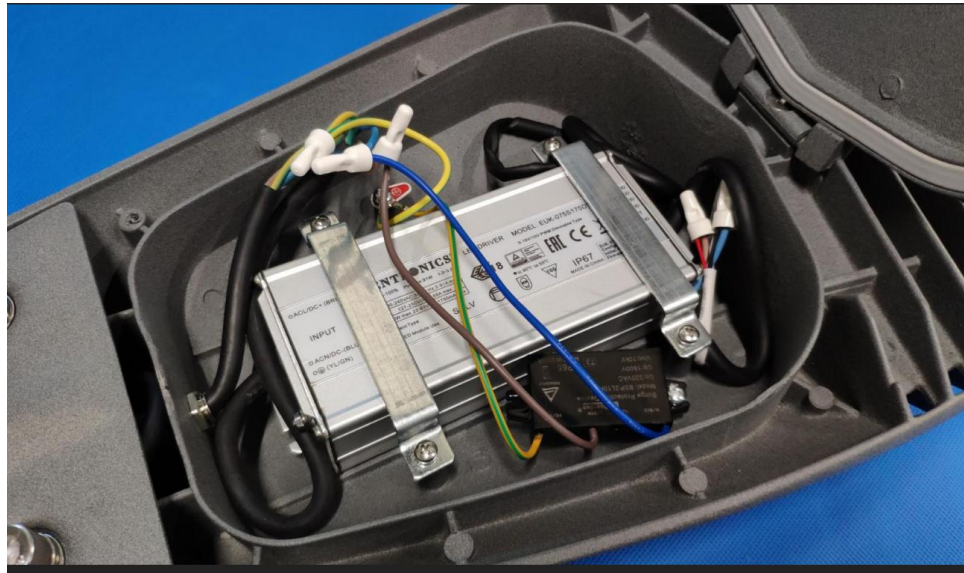Appendix 4: Photograph

EL-SL08(1L) series

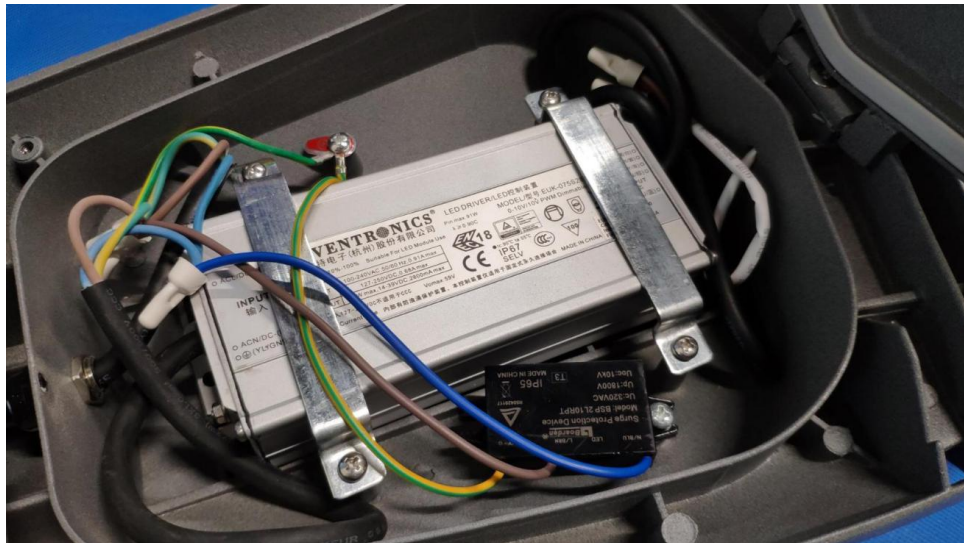

EL-SL08(1L) series

Appendix 4: Photograph



EL-SL08(1S) series



EL-SL08(3) series

Appendix 4: Photograph



EL-SL09(1S)-20



EL-SL09(1L) series

Appendix 4: Photograph



EL-SL09(2) series



EL-SL09(3) series

Appendix 4: Photograph



EL-SL18MA series



EL-SL20(L) series

Appendix 4: Photograph

EL-SL20(M) series




EL-SL20(S) series

Appendix 4: Photograph



EL-SL58 series

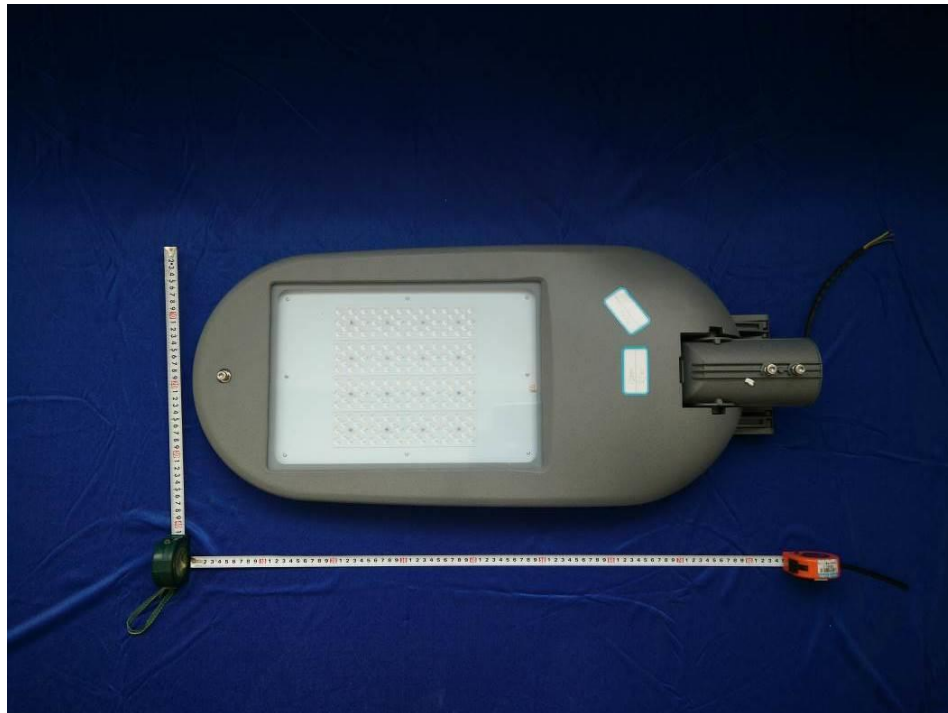

EL-SL20A(L) series

Appendix 4: Photograph

EL-SL20A(M) series



EL-SL20A(M) series

Appendix 4: Photograph

EL-SL20A(M) series



EL-SL20A(S) series

Appendix 4: Photograph

LED controlgear



LED controlgear

Appendix 4: Photograph



LED controlgear



LED controlgear

Appendix 4: Photograph



LED controlgear



LED controlgear

Appendix 4: Photograph

LED controlgear



LED module: LUXEON 5050

Appendix 4: Photograph




EL-SL68(L) series



Back-side

Appendix 4: Photograph

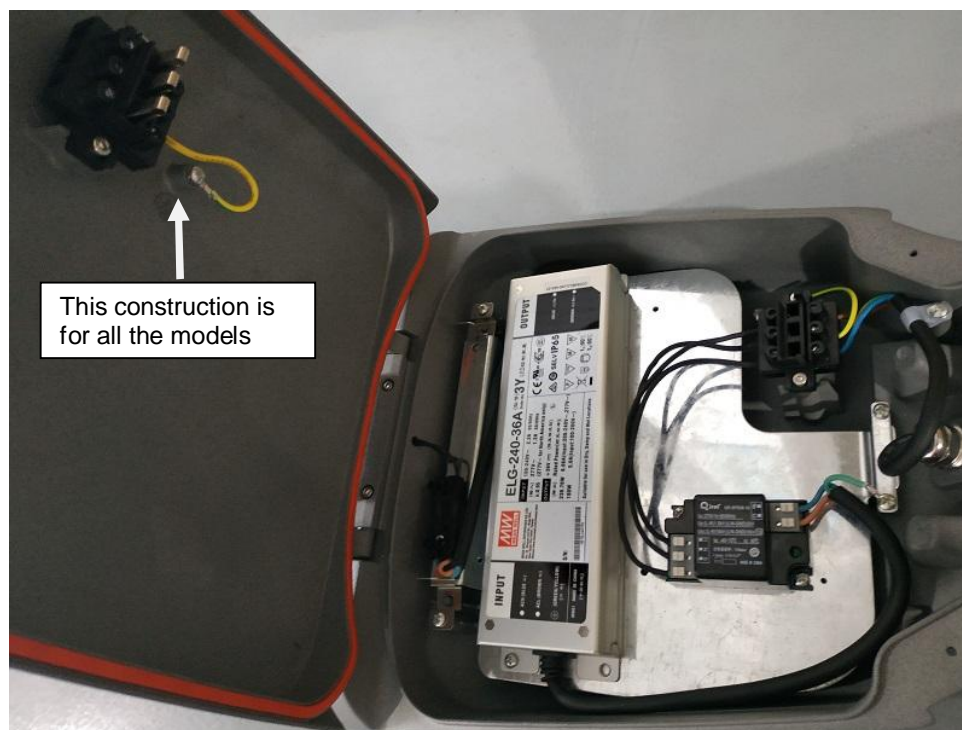

Internal construction



SPD

Appendix 4: Photograph



Terminal block




LED driver

Appendix 4: Photograph




LED driver

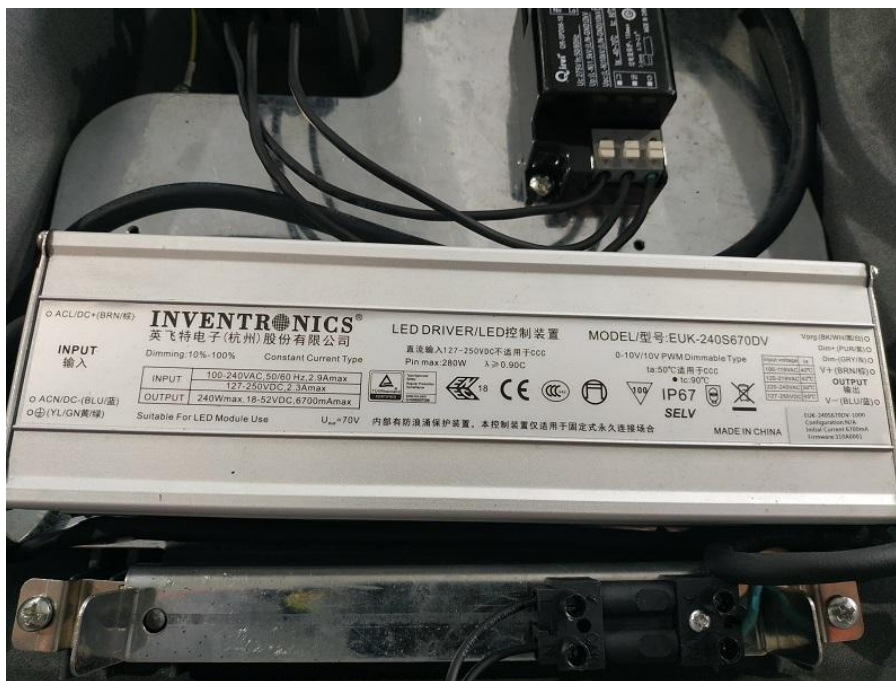

LED driver

Appendix 4: Photograph

LED driver

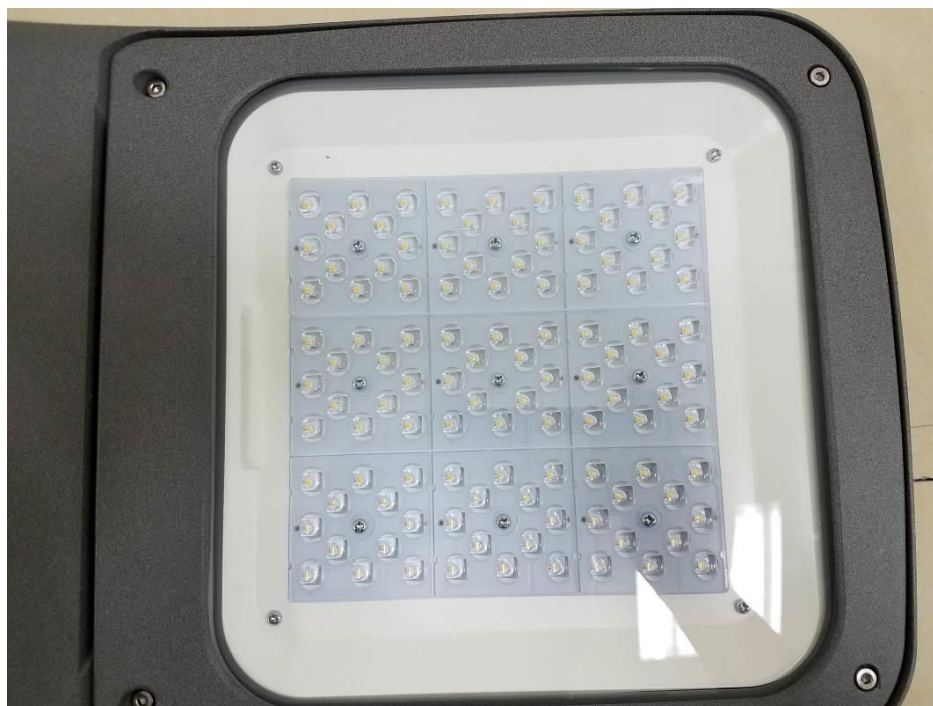

LED module

Appendix 4: Photograph



EL-SL68(L)-200



EL-SL10(1) series

Appendix 4: Photograph

EL-SL10(2) series



EL-SL10(3) series


Appendix 4: Photograph

EL-SL11(L) series



EL-SL11(L) series

Appendix 4: Photograph

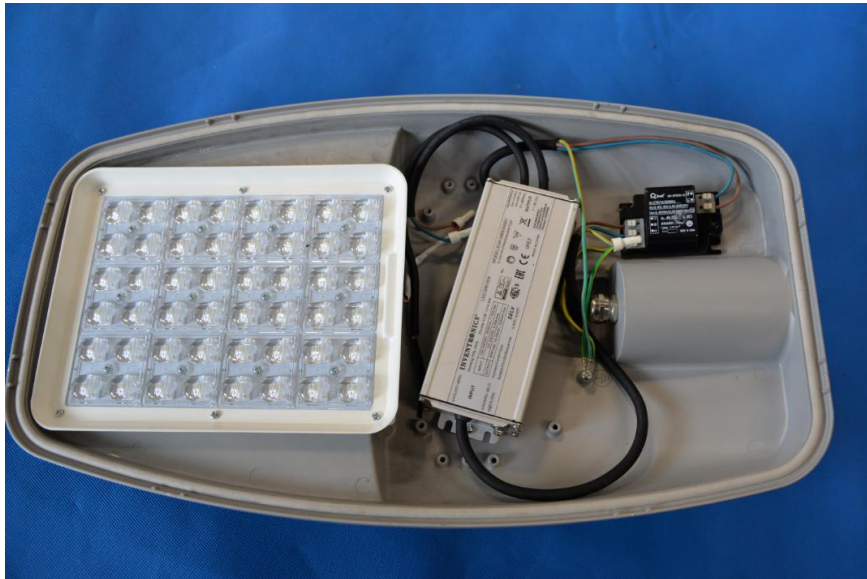


EL-SL11(L) series




EL-SL11(S) series

Appendix 4: Photograph


EL-SL11(M) series

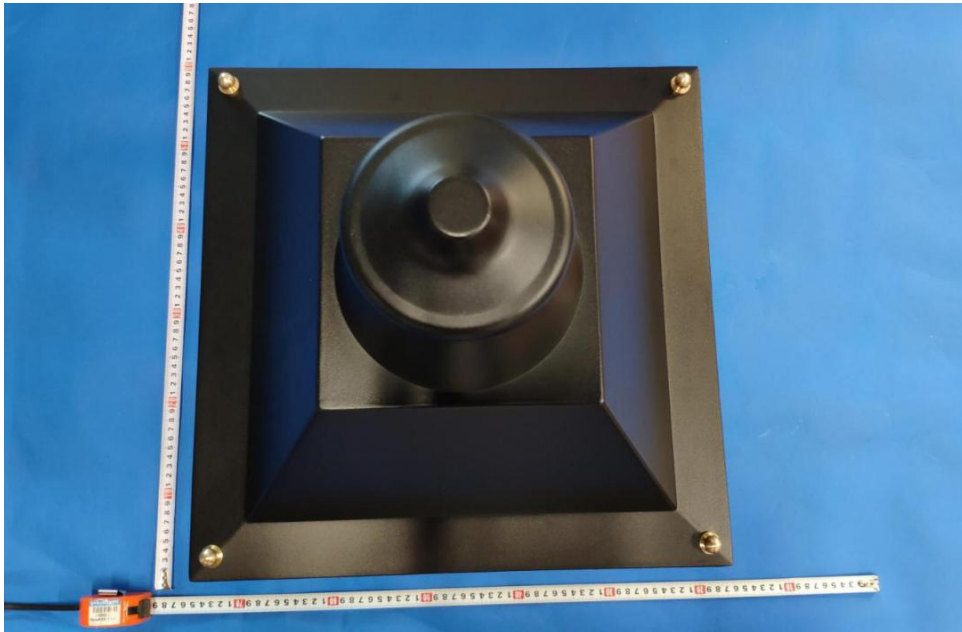

EL-GL01 series

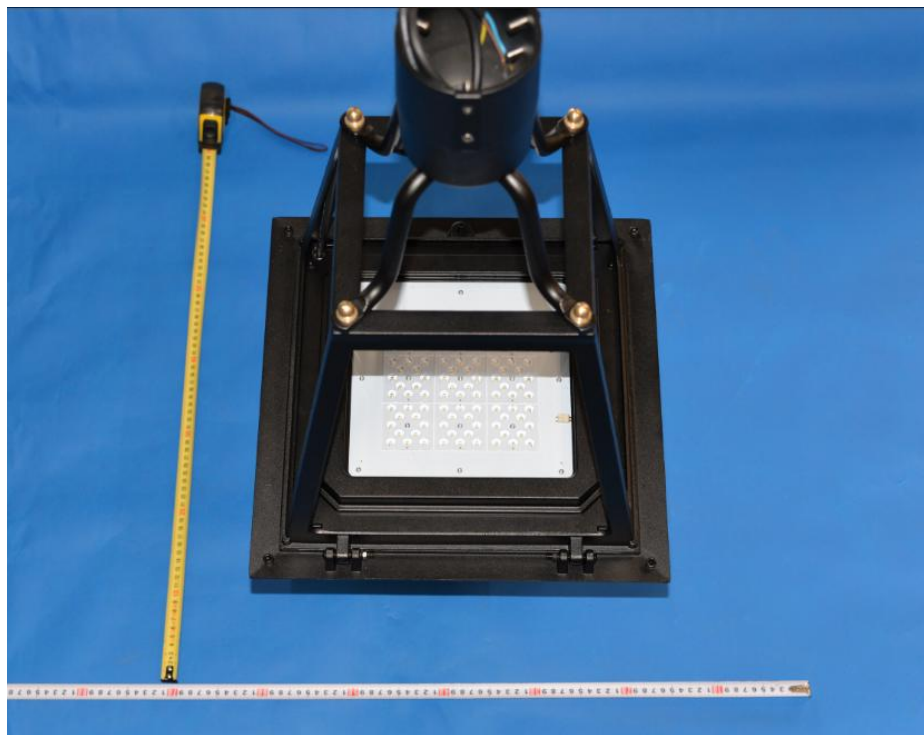Appendix 4: Photograph

EL-GL01 series

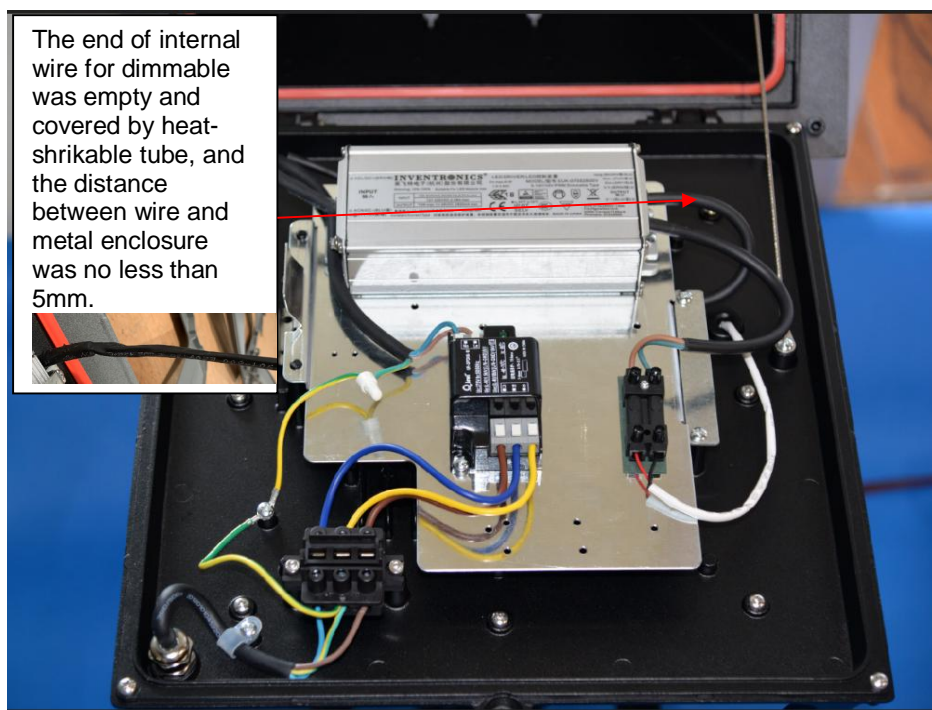


EL-GL01 series

Appendix 4: Photograph

Over view of EL-SL68(M)-150



Over view of EL-SL68(M)-150

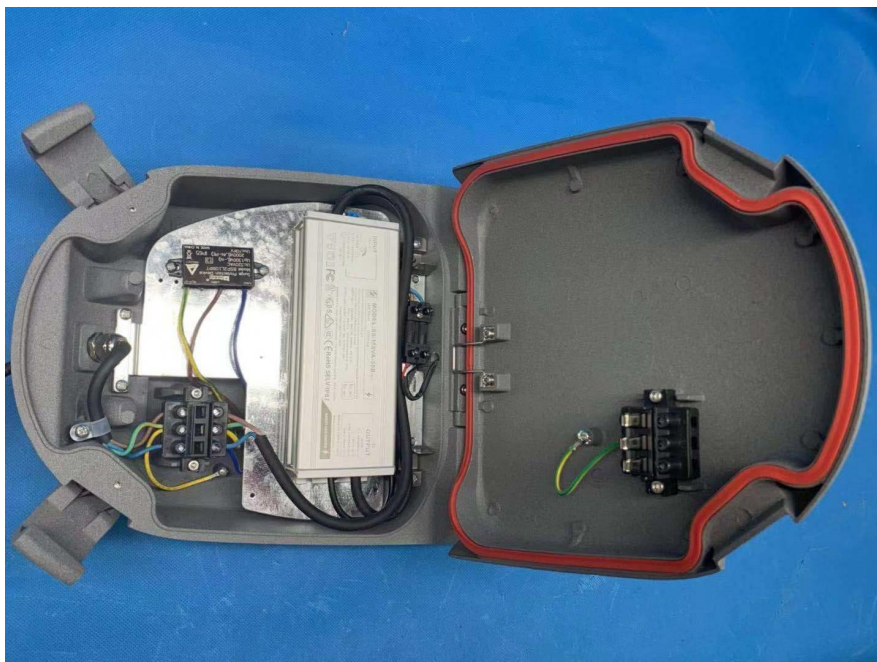
Appendix 4: Photograph

Open view of EL-SL68(M)-150




SPD


Appendix 4: Photograph

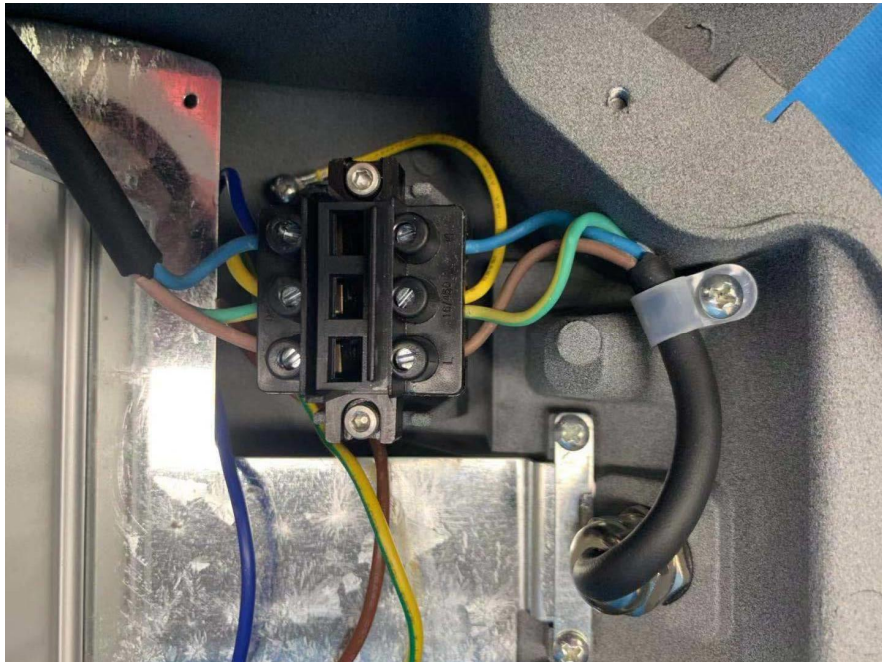

Terminal block

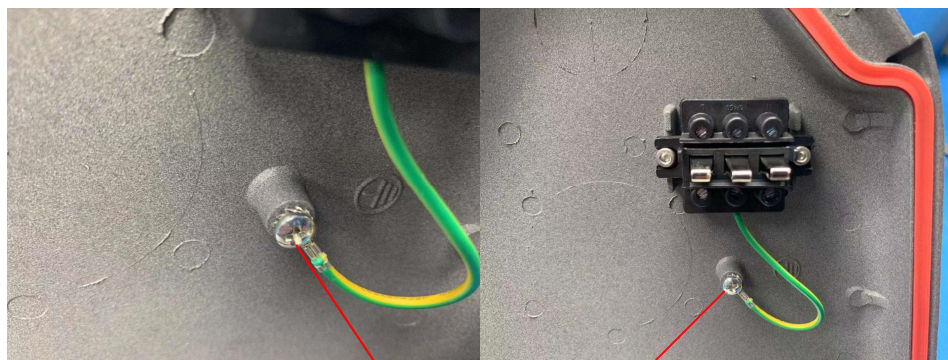


Earthing wire



Appendix 4: Photograph

LED Driver of SS-150VA-56B

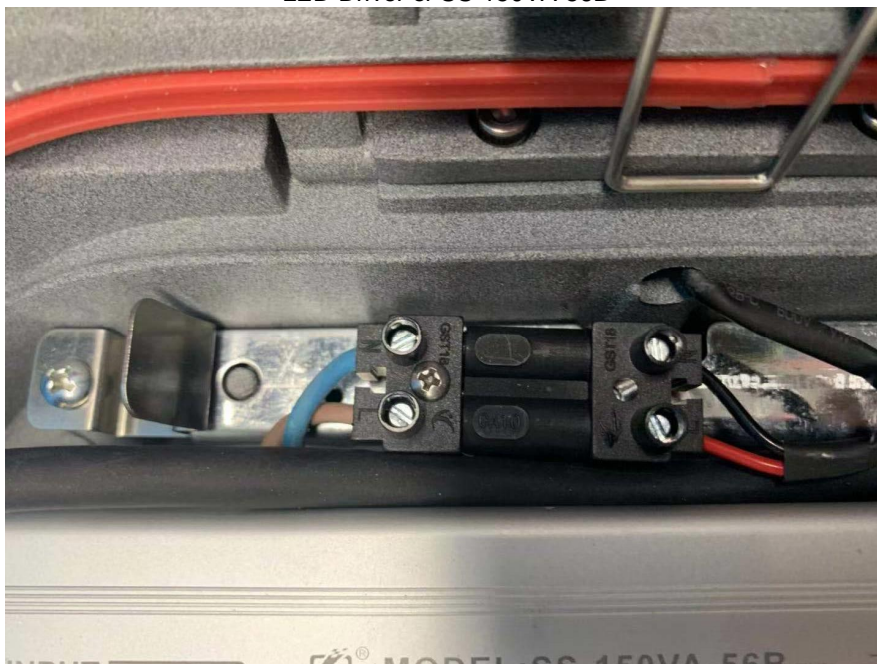


Connector Installation couplers

Appendix 4: Photograph



LED

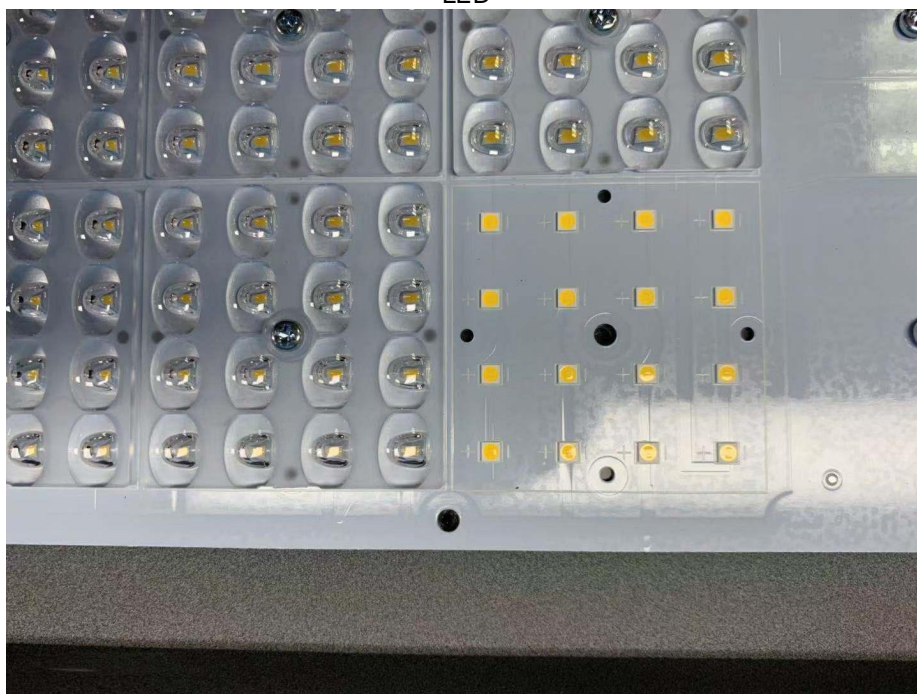

LED



TEST REPORT
IEC 62031
LED modules for general lighting – Safety specifications

Report Number. : 083-180808-300 attachment 1

Date of issue..... : 2020-06-08

Total number of pages 57

Name of Testing Laboratory preparing the Report TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch

Applicant's name..... : Everlite LED Lighting Co., Limited

Address..... : Room 2105, Trend Centre, 29-31, Cheung Lee Street Chaiwan
HONG KONG

Test specification:

Standard : IEC 62031:2018

Test procedure : CB Scheme

Non-standard test method : N/A

Test Report Form No. : IEC62031F

Test Report Form(s) Originator.... : Intertek Semko AB

Master TRF..... : 2018-06-14

Copyright © 2018 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.


This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Test item description..... :	LED module within LED Street Light
Trade Mark..... :	N/A
Manufacturer..... :	Same as applicant
Model/Type reference..... :	EL-SL18MA-20W, EL-SL18MA-30W, EL-SL18MA-40W, EL-SL18MA-50W, EL-SL18MA-60W, EL-SL18MA-70W, EL-SL18MA-80W, EL-SL18MA-90W, EL-SL18LA-90W, EL-SL18LA-100W, EL-SL18LA-110W, EL-SL18LA-120W, EL-SL18LA-130W, EL-SL18LA-140W, EL-SL18LA-150W, EL-SL18LA-160W, EL-SL58-120W, EL-SL58-100W, EL-SL58-90W, EL-SL58-60W, SL58(S)-20W, EL-SL58(S)-30W, EL-SL58(S)-40W, EL-SL58(S)-50W, EL-SL58(S)-60W, EL-SL68(MINI)-20W, EL-SL68(MINI)-30W, EL-SL68(MINI)-40W, EL-SL68(MINI)-50W, EL-SL68(S)-60W, EL-SL68(S)-80W, EL-SL68(S)-90W, EL-SL68(S)-100W, EL-SL68(M)-110W, EL-SL68(M)-120W, EL-SL68(L)-140W; EL-SL68(L)-150W;
Ratings..... :	220-240V~; 50/60Hz; EL-SL18MA-20W, EL-SL58(S)-20W: 20W; EL-SL58-120W:120W; EL-SL18MA-30W, EL-SL58(S)-30W: 30W; EL-SL58-100W:100W; EL-SL18MA-40W, EL-SL58(S)-40W: 40W; EL-SL58-90W:90W; EL-SL18MA-50W, EL-SL58(S)-50W:50W; EL-SL58-80W:60W; EL-SL18MA-60W, EL-SL58(S)-60W: 60W; EL-SL18MA-70W: 70W; EL-SL18MA-80W: 80W; EL-SL18MA-90W, EL-SL18LA-90W: 90W; EL-SL18LA-100W:100W; EL-SL18LA-110W:110W; EL-SL18LA-120W:120W; EL-SL18LA-130W:130W; EL-SL18LA-140W:140W; EL-SL18LA-150W:150W; EL-SL18LA-160W: 160W EL-SL68(MINI)-20W:20W; EL-SL68(MINI)-30W:30W, EL-SL68(MINI)-40W:40W, EL-SL68(MINI)-50W:50W, EL-SL68(S)-60W:60W, EL-SL68(S)-80W:80W, EL-SL68(S)-90W:90W, EL-SL68(S)-100W:100W, EL-SL68(M)-110W:110W, EL-SL68(M)-120W:120W, EL-SL68(L)-140W:140W, EL-SL68(L)-150W:150W,

Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
<input type="checkbox"/>	CB Testing Laboratory:	TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch No.151 Heng Tong Road. Shanghai 200070 P.R. China
Testing location/ address.....:		No. 1999, Duhui Road, Shanghai, 201108, P. R. China
Tested by (name, function, signature).....:		Lichen WANG, Project handler
Approved by (name, function, signature)....:		Xudong ZANG, Designated reviewer
		
<input type="checkbox"/>	Testing procedure: CTF Stage 1:	N/A
Testing location/ address.....:		N/A
Tested by (name, function, signature).....:		N/A
Approved by (name, function, signature)....:		N/A
<input type="checkbox"/>	Testing procedure: CTF Stage 2:	N/A
Testing location/ address.....:		N/A
Tested by (name + signature)		N/A
Witnessed by (name, function, signature)..:		N/A
Approved by (name, function, signature)....:		N/A
<input type="checkbox"/>	Testing procedure: CTF Stage 3:	N/A
<input type="checkbox"/>	Testing procedure: CTF Stage 4:	N/A
Testing location/ address.....:		N/A
Tested by (name, function, signature).....:		N/A
Witnessed by (name, function, signature)..:		N/A
Approved by (name, function, signature)....:		N/A
Supervised by (name, function, signature) :		N/A

List of Attachments (including a total number of pages in each attachment): N/A	
Summary of testing: The sample's mentioned in this report is/are submitted/ supplied/ manufactured by client. The laboratory therefore assumes no responsibility for accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.	
Tests performed (name of test and test clause): According to the client's requirements, the related tests were only performed on LED module, which were within model EL-SL18LA-160W and EL-SL58(S)-60W, EL-SL68(MINI)-50W, EL-SL68(S)-100W, EL-SL68(M)-120W,, EL-SL68(L)-150W	Testing location: TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch No. 1999, Duhui Road, Shanghai, 201108, P. R. China
Summary of compliance with National Differences: N/A List of countries addressed <input type="checkbox"/> The product fulfils the requirements of _____ (insert standard number and edition and delete the text in parenthesis, leave it blank or delete the whole sentence, if not applicable)	
Copy of marking plate: The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks. The copy of of marking plate was not taken into account.	

Test item particulars	LED module within LED Street Light
Classification of installation and use.....	Integral LED module, normal use
Supply Connection	Lead wire
.....	
Possible test case verdicts:	
- test case does not apply to the test object..... : N/A	
- test object does meet the requirement..... : P (Pass)	
- test object does not meet the requirement..... : F (Fail)	
Testing	
Date of receipt of test item..... : 2020-01-02	
Date (s) of performance of tests : 2020-01-02 to 2020-06-08	
General remarks:	
<p>"(See Enclosure #)" refers to additional information appended to the report.</p> <p>"(See appended table)" refers to a table appended to the report.</p> <p>Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.</p> <p>Clause numbers between brackets refer to clauses in IEC 61347-1</p> <p>Remark1:</p> <p>This test report replaces the previous version 704021930711-00, issued on 2019-05-08 due to the modifications mentioned as below:</p> <p>1. Add details and photos of LED module, details see Annex 1 and updated Appendix 1.</p> <p>2. New models of EL-SL18MA-20W, EL-SL18MA-30W, EL-SL18MA-40W, EL-SL18MA-50W, EL-SL18MA-60W, EL-SL18MA-70W, EL-SL18MA-80W, EL-SL18MA-90W, EL-SL18LA-90W, EL-SL18LA-100W, EL-SL18LA-110W, EL-SL18LA-120W, EL-SL18LA-130W, EL-SL18LA-140W, EL-SL18LA-150W, EL-SL58(S)-20W, EL-SL58(S)-30W, EL-SL58(S)-40W and EL-SL58(S)-50W , EL-SL58-120W, EL-SL58-100W, EL-SL58-90W, EL-SL58-60W, EL-SL68(MINI)-20W, EL-SL68(MINI)-30W, EL-SL68(MINI)-40W, EL-SL68(MINI)-50W, EL-SL68(S)-60W, EL-SL68(S)-80W, EL-SL68(S)-90W, EL-SL68(S)-100W, EL-SL68(M)-110W, EL-SL68(M)-120W, EL-SL68(L)-140W; EL-SL68(L)-150W; were added in the test report.</p> <p>Models of EL-SL18MA-20W, EL-SL18MA-30W, EL-SL18MA-40W, EL-SL18MA-50W, EL-SL18MA-60W, EL-SL18MA-70W, EL-SL18MA-80W, EL-SL18MA-90W, EL-SL18LA-100W, EL-SL18LA-110W, EL-SL18LA-120W, EL-SL18LA-130W, EL-SL18LA-140W and EL-SL18LA-150W shared the similar construction, same circuit principle and same LED module type with model EL-SL18LA-160W except for LED number due to different rating power. Models of EL-SL58(S)-20W, EL-SL58(S)-30W, EL-SL58(S)-40W and EL-SL58(S)-50W shared the similar construction, same circuit principle and same LED module type with model EL-SL58(S)-60W except for LED number due to different rating power.</p> <p>After evaluation, no new test items need to be considered.</p> <p>Remark 2:</p> <p>The following contents are included and as appendix of this test report:</p> <ol style="list-style-type: none"> 1) Test report IEC 62031:2018 2) Appendix 1: Additional requirements of IEC/TR 62778:2014 3) Appendix 2: Photographs <p>Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60068-2-2:</p>	

The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided.....:	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies)..... : Ningbo Shishang Photoelectricity Technology Co., Limited No.19, KeSan Road Ninghai 315600 Ningbo PEOPLE'S REPUBLIC OF CHINA	
General product information: The LED modules are integral within LED Street Light, supplied with approved LED driver. Models of EL-SL18MA-20W, EL-SL18MA-30W, EL-SL18MA-40W, EL-SL18MA-50W, EL-SL18MA-60W, EL-SL18MA-70W, EL-SL18MA-80W, EL-SL18MA-90W, EL-SL18LA-90W, EL-SL18LA-100W, EL-SL18LA-110W, EL-SL18LA-120W, EL-SL18LA-130W, EL-SL18LA-140W and EL-SL18LA-150W shared the similar construction, same circuit principle and same LED module type with model EL-SL18LA-160W except for LED number due to different rating power. Models of EL-SL58(S)-20W, EL-SL58(S)-30W, EL-SL58(S)-40W and EL-SL58(S)-50W shared the similar construction, same circuit principle and same LED module type with model EL-SL58(S)-60W except for LED number due to different rating power. EL-SL68(MINI)-50W, EL-SL68(S)-100W, EL-SL68(M)-120W, EL-SL68(L)-150W	

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
4	GENERAL REQUIREMENTS		P
4.2	Classification		
	Built-in module	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	¾
	Independent module	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	¾
	Integral module	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	¾
4.6	Independent modules comply with requirements in IEC 60598-1:2014/AMD1:2017		N/A
4.8	Modules with integrated controlgear providing SELV comply with requirements according to IEC 61347-1:2015/AMD1:2017 clause L.5 to L.11.	(see Annex 1)	N/A

6	MARKING		P
6.2	Contents of marking for built-in and for independent LED modules		N/A
	a) mark of origin		N/A
	b) model number, type reference		N/A
	c1) constant voltage module; rated supply voltage and supply frequency		N/A
	c2) constant current module; rated supply current and supply frequency		N/A
	d) rated power		N/A
	e) indication of connections, wiring diagram		N/A
	f) value of t_c and place on the module		N/A
	g) E_{thr} if required		N/A
	h) symbol for built-in modules		N/A
	i) heat transfer temperature t_d		N/A
	j) power for heat-conduction P_d		N/A
	k) working voltage for insulation		N/A
6.3	Location of marking for built-in LED modules		N/A
	- marking of a) and b) in 6.2 on the modules		N/A
	- marking of other applicable items in 6.2 on the modules or in data sheet, leaflet or website		N/A
6.4	Location of marking for independent LED modules		N/A
	- marking of a), b), c) and f) in 6.2 on the modules		N/A
	- marking of other applicable items in 6.2 on the modules or in data sheet, leaflet or website		N/A
6.5	Marking of integral LED modules		P

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
	- information in 6.2 a) to g) in data sheet, leaflet or website		P
6.6	Durable and legibility of marking		N/A
	- marking on the LED module legible after test with water		N/A
	- marking not on the LED module legible		N/A
7	TERMINALS		N/A
7.1	Integral terminals		N/A
	Screw terminals comply with section 14 of IEC 60598-1	(see Annex 3)	N/A
	Screwless terminals comply with section 15 of IEC 60598-1	(see Annex 4)	N/A
7.2	Terminals other than integral terminals		N/A
	Separately approved; component list	(see Annex 2)	N/A
	Ratings suit the conditions		N/A
	Satisfy additional relevant requirements of this standard		N/A
8 (9)	EARTHING		N/A
- (9.1)	Provisions for protective earthing		N/A
	Terminal complying with clause 8		N/A
	Locked against loosening and not possible to loosen by hand		N/A
	Not possible to loosen clamping means unintentionally on screwless terminals		N/A
	Earthing via means of fixing		N/A
	Earthing terminal only used for the earthing of the control gear		N/A
	All parts of material minimizing the danger of electrolytic corrosion		N/A
	Made of brass or equivalent material		N/A
	Contact surface bare metal		N/A
	Test according 7.2.3 of IEC 60598-1		N/A
- (9.2)	Provision for functional earthing		N/A
	Comply with clause 8 and 9.1		N/A
	Functional earth insulated from live parts by double or reinforced insulation		N/A

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
- (9.3)	Lamp controlgear with conductors for protective earthing by tracks on printed circuit board		N/A
	Test with a current of 25 A between earthing terminal and each of the accessible metal parts; measured resistance (W) at ³ 10 A according 7.2.3 of IEC 60598-1: < 0,5 W :		N/A
- (9.4)	Earthing of built-in lamp controlgear		N/A
	Earth by means of fixing to earthed metal of luminaire in compliance of 7.2 of IEC 60598-1		N/A
	Earthing terminal only for earthing the built-in controlgear		N/A
- (9.5)	Earthing via independent controlgear		N/A
- (9.5.1)	Earth connection to other equipment		N/A
	Looping or through connection, conductor min. 1,5 mm ² and of copper or equivalent		N/A
	Protective earthing wires in line with 5.3.1.1 and clause 7		N/A
- (9.5.2)	Earthing of the lamp compartments powered via the independent lamp controlgear		N/A
	Test with a current of 25 A between input and output earth terminals; measured resistance (W) between earthing terminal and each of the accessible metal parts at ³ 10 A according 7.2.3 of IEC 60598-1: < 0,5 W :		N/A
	Output earthing terminal marked as in 7.1 t) of IEC 61347-1		N/A
9 (10)	PROTECTION AGAINST ACCIDENTAL CONTACT WITH LIVE PARTS		N/A
- (10.1)	Controlgear protected against accidental contact with live parts		N/A
- (A2)	Voltage measured with 50 kW	(see Annex A)	N/A
- (A3)	Voltage > 35 V peak or > 60 V d.c. or protective impedance device	(see Annex A)	N/A
- (10.1)	Lacquer or enamel not used for protection or insulation		N/A
	Adequate mechanical strength on parts providing protection		N/A
- (10.2)	Capacitors > 0,5 nF: voltage after 1 min (V): < 50 V :		N/A
- (10.3)	Controlgear providing SELV		N/A
	Accessible conductive parts are insulated from live parts by double or reinforced insulation in SELV controlgear		N/A

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
	No connection between output circuit and the body or protective earthing circuit		N/A
	No possibility of connection between output circuit and the body or protective earthing circuit through other conductive parts		N/A
	SELV outputs separated from earth by at least basic insulation		N/A
	ELV conductive parts insulated as live parts		N/A
	Tests according Annex L of IEC 61347-1		N/A
- (10.4)	Accessible conductive parts in SELV circuits		N/A
	Output voltage under load ≤ 25 V r.m.s. or ≤ 60 V d.c.		N/A
	If output voltage > 25 V r.m.s. or > 60 V d.c.; No load output ≤ 35 V peak or ≤ 60 V d.c and touch current does not exceed 0,7 mA (peak) or 2 mA d.c.:		N/A
	One conductive part is insulated if output voltage or current exceeding the values above and withstand test voltage 500 V		N/A
	Double or reinforced insulation bridged by appropriate and at least two resistors or two Y2 capacitors or one Y1 capacitor		N/A
	Y1 or Y2 capacitors comply with IEC 60384-14		N/A
	Resistors comply with test (a) in 14.1 of IEC 60065		N/A
10 (11)	MOISTURE RESISTANCE AND INSULATION		P
	After storage 48 h at 91-95% relative humidity and 20-30 °C measuring of insulation resistance with d.c. 500 V (MW):		P
	For basic insulation ≥ 2 MW	> 100 MW	P
	For double or reinforced insulation ≥ 4 MW		N/A
	Between primary and secondary circuits in controlgear providing SELV, values in Annex L in IEC 61347-1		N/A
11 (12)	ELECTRIC STRENGTH		P
	Immediately after clause 11 electric strength test for 1 min		P
	Basic insulation for SELV, test voltage 500 V		P
	Working voltage ≤ 50 V, test voltage 500 V		N/A
	Working voltage > 50 V ≤ 1000 V, test voltage (V):		P
	Basic insulation, $2U + 1000$ V		P

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
	Supplementary insulation, 2U + 1000 V		N/A
	Double or reinforced insulation, 4U + 2000 V		N/A
	No flashover or breakdown		P
	Solid or thin sheet insulation for double or reinforced insulation fulfil the requirements in Annex N in IEC 61347-1		N/A
12 (14)	FAULT CONDITIONS		P
- (14.1)	When operated under fault conditions the controlgear:		P
	- does not emit flames or molten material		P
	- does not produce flammable gases		P
	- protection against accidental contact not impaired		P
	Thermally protected controlgear does not exceed the marked temperature value		N/A
	Fault conditions: capacitors, resistors or inductors without proof of compliance with relevant specifications have been short-circuited or disconnected	(see appended table)	P
- (14.2)	Short-circuit of creepage distances and clearances if less than specified in clause 16 in Part 1 (after any reduction in 14.2 - 14.5)	(see appended table)	N/A
- (14.3)	Short-circuit or interruption of semiconductor devices	(see appended table)	P
- (14.4)	Short-circuit across insulation consisting of lacquer, enamel or textile	(see appended table)	N/A
- (14.5)	Short-circuit across electrolytic capacitors	(see appended table)	N/A
	Short-circuit or interruption of SPDs	(see appended table)	N/A
- (14.6)	After the tests has been carried out on three samples:		P
	The insulation resistance ³ 1 MW :	>100MW	P
	No flammable gases		P
	No accessible parts have become live		P
	During the tests, a five-layer tissue paper, where the test specimen is wrapped, does not ignite		P
- (14.7)	Relevant fault condition tests with high-power a.c. supply and in turn to a d.c. supply		¾
12.2	Overpower condition		P
	Module withstands overpower condition >15 min.		N/A
	Module with automatic protective device or power limiter, test performed 15 min. at limit.		P
	No fire, smoke or flammable gas is produced		P

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
	Molten material does not ignite tissue paper, spread below the module		P
14 (15)	CONSTRUCTION		P
- (15.1)	Wood, cotton, silk, paper and similar fibrous material		P
	Wood, cotton, silk, paper and similar fibrous material not used as insulation		P
- (15.2)	Printed circuits		P
	Printed circuits used as internal connections complies with clause 14		P
15 (16)	CREEPAGE DISTANCES AND CLEARANCES		P
- (16.1)	General		P
	Creepage distances and clearances according to 16.2 and 16.3		P
	Controlgears providing SELV comply with additional requirements in Annex L		N/A
	Insulating lining of metallic enclosures		N/A
	Controlgear protected against pollution comply with Annex P		N/A
- (16.2)	Creepage distances		P
- (16.2.2)	Minimum creepage distances for working voltages		P
	Creepage distances according to Table 7	(see appended table)	P
- (16.2.3)	Creepage distances for working voltages with frequencies above 30 kHz		N/A
	Creepage distances according to Table 8	(see appended table)	N/A
- (16.3)	Clearances		P
- (16.3.2)	Clearances for working voltages		P
	Clearances distances according to Table 9	(see appended table)	P
- (16.3.3)	Clearances for ignition voltages and working voltages with higher frequencies		N/A
	Clearances distances for basic or supplementary insulation according to Table 10		N/A
	Clearances distances for reinforced insulation according to Table 11		N/A
16 (17)	SCREWS, CURRENT-CARRYING PARTS AND CONNECTIONS		P
	Screws, current-carrying parts and connections in compliance with IEC 60598-1 (clause numbers between parentheses refer to IEC 60598-1)		¾
(4.11)	Electrical connections		P
(4.11.1)	Contact pressure		P

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
(4.11.2)	Screws:		N/A
	- self-tapping screws		N/A
	- thread-cutting screws		N/A
(4.11.3)	Screw locking:		N/A
	- spring washer		N/A
	- rivets		N/A
(4.11.4)	Material of current-carrying parts		P
(4.11.5)	No contact to wood or mounting surface		P
(4.11.6)	Electro-mechanical contact systems		N/A
(4.12)	Mechanical connections and glands		N/A
(4.12.1)	Screws not made of soft metal		N/A
	Screws of insulating material		N/A
	Torque test: torque (Nm); part.....:		N/A
	Torque test: torque (Nm); part.....:		N/A
	Torque test: torque (Nm); part.....:		N/A
(4.12.2)	Screws with diameter < 3 mm screwed into metal		N/A
(4.12.4)	Locked connections:		N/A
	- fixed arms; torque (Nm).....:		N/A
	- lampholder; torque (Nm).....:		N/A
	- push-button switches; torque 0,8 Nm.....:		N/A
(4.12.5)	Screwed glands; force (Nm).....:		N/A
17 (18)	RESISTANCE TO HEAT, FIRE AND TRACKING		P
- (18.1)	Ball-pressure test	See Test Table 17 (18.1)	P
- (18.2)	Test of printed boards	See Test Table 17 (18.2)	N/A
- (18.3)	Glow-wire test (650°C)	See Test Table 17 (18.3)	P
- (18.4)	Needle-flame test (10 s)	See Test Table 17 (18.4)	N/A
- (18.5)	Proof tracking test	See Test Table 17 (18.5)	N/A
18	RESISTANCE TO CORROSION		N/A
	Comply with requirements according 4.18 of IEC 60598-1		N/A
20	HEAT MANAGEMENT		N/A
20.1	General		N/A

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict

	Fulfil clause 20 if replaceable LED module and when heat conducting thermal interface is needed.		N/A
20.2	Thermal interface material		N/A
	Thermal interface material delivered with the module if necessary		N/A
20.3	Heat protection		N/A
	Not impair safety when operated under poor heat-conduction conditions according Annex D		N/A

22	PHOTOBIOLOGICAL SAFETY		P
22.1	UV radiation		P
	Luminous radiation not exceed 2mW/klm		P
22.2	Blue light hazard		P
	Assessed according to IEC TR 62778	EL-SL18LA-160: RG1 EL-SL58(S)-60: RG0 EL-SL68-150: RG1	P
22.3	Infrared radiation		P
	Requirements for infrared radiation when required		P

A	ANNEX A - TESTS		P
	All tests performed in accordance with the advice given in Annex H of IEC 61347-1, if applicable		P

12 (14)	TABLE: tests of fault conditions		P
Part	Simulated fault		Hazard
EL-SL18LA-160:			
Single LED	Short-circuit, the luminaire didn't work, recoverable.		NO
EL-SL58(S)-60:			
Single LED	Short-circuit, the luminaire didn't work, recoverable.		NO
EL-SL68-150:			
150% power	Fused open, unrecovered.		NO
One LED	Work, normal operation		NO
Output circuit	No work, recovered.		NO
Double-load	Work, normal operation		NO
No-load	Work, normal operation		NO

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict

15 (16)	TABLE: clearance and creepage distance measurements (mm)						P
Applicable part of IEC 61347-1 Table 7 – 11*							
Distances	Insulation type **	Measured clearance	Required		Measured creepage	Required	
			clearance	*Table		creepage	*Table
Distance 1:	B	2,0	0,5	11.1	2,0	1,6	11.1
Working voltage (V).....:					Uout: SELV		¾
Frequency if applicable (kHz)					N/A		¾
PTI.....:					< 600 ☒ ≥ 600 ☐		¾
Peak value of the working voltage \hat{U}_{out} if applicable (kV)					N/A		¾
Pulse voltage if applicable (kV)					N/A		¾
Supplementary information:							
1. Current-carrying of different polarity.							
2. No value are specified for working voltages below 25 V a.c. and 60 V ripple free d.c..							
Distance 2:	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Working voltage (V).....:					N/A		¾
Frequency if applicable (kHz)					N/A		¾
PTI.....:					< 600 ☐ ≥ 600 ☐		¾
Peak value of the working voltage \hat{U}_{out} if applicable (kV)					N/A		¾
Pulse voltage if applicable (kV)					N/A		¾
Supplementary information:							
Distance 3:	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Working voltage (V).....:					N/A		¾
Frequency if applicable (kHz)					N/A		¾
PTI.....:					< 600 ☐ ≥ 600 ☐		¾
Peak value of the working voltage \hat{U}_{out} if applicable (kV)					N/A		¾
Pulse voltage if applicable (kV)					N/A		¾
Supplementary information:							

** Insulation type: B – Basic; S – Supplementary; R – Reinforced

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict

17 (18.1)	TABLE: Ball Pressure Test of Thermoplastics			P
Allowed impression diameter (mm):		2		¾
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)	
PC cover	See Annex 1	75	1,05	
Supplementary information: N/A				

17 (18.2)	TABLE: Test of printed boards				N/A
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (s)	Ignition of specified layer Yes/No	Duration of burning (s)	Verdict
Supplementary information:					

17 (18.3)	TABLE: Glow-wire test				P
Glow wire temperature		650°C			¾
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
PC cover	See Annex 1	30	No	0	P
Any flame or glowing of the sample extinguished within 30 s of withdrawing the glow-wire, and any burning or molten drop did not ignite the underlying parts (Yes/No).....					Yes
Supplementary information:					

17 (18.4)	TABLE: Needle-flame test				N/A
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
Supplementary information:					

17 (18.5)	TABLE: Proof tracking test				N/A
Test voltage PTI		175 V			¾
Object/ Part No./ Material	Manufacturer/ trademark	Withstand 50 drops without failure on three places or on three specimens			Verdict
Supplementary information:					

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
(A)	ANNEX A - TEST TO ESTABLISH WHETHER A CONDUCTIVE PART IS A LIVE PART WHICH MAY CAUSE AN ELECTRIC SHOCK		N/A
(A.1)	Comply with A.2 or A.3		N/A
(A.2)	Voltage ≤ 35 V peak or ≤ 60 V d.c. :		N/A
(A.3)	If voltage measured according Clause A.2 exceeds the limit value; touch current does not exceed 0,7 mA (peak) or 2 mA d.c. :		N/A
	Comply with Annex G.2 of IEC 60598-1		N/A

ANNEX 1	LED MODULES WITH INTEGRAL CONTROLGEAR PROVIDING SELV		N/A
(L.5)	Protection against electric shock		N/A
	Comply with 9.2 of IEC 61558-1		N/A
(L.6)	Heating		N/A
	No excessive temperatures in normal use		N/A
	Value if capacitor tc marked:		$\frac{3}{4}$
	Winding insulation classified as Class:		$\frac{3}{4}$
	Comply with tests of clause 14 of IEC 61558-1 with adjustments		N/A
(L.7)	Short-circuit and overload protection		N/A
	Comply with tests of clause 15 of IEC 61558-1 with adjustments		N/A
(L.8)	Insulation resistance and electric strength		N/A
(L.8.1)	Conditioned 48 h between 91 % and 95 %		N/A
(L.8.2)	Insulation resistance		N/A
	Between input- and output circuits not less than 5 MW:		N/A
	Between metal parts of class II convertors which are separated from live parts by basic insulation only and the body not less than 5 MW:		N/A
	Between metal foil in contact with the inner and outer surfaces of enclosures of insulating material not less than 2 MW:		N/A
(L.8.3)	Electric strength		N/A
	1) Between live parts of input circuits and live parts of output circuits:		N/A
	2) Over basic or supplementary insulation between:		N/A
	a) live parts having different polarity:		N/A

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
	b) live parts and body if intended to be connected to protective earth		N/A
	c) accessible metal parts and a metal rod of the same diameter as the flexible cable or cord		N/A
	d) live parts and an intermediate metal part		N/A
	e) intermediate metal parts and the body		N/A
	f) each input circuit and all other input circuits		N/A
	3) Over reinforced insulation between the body and live parts		N/A
(L.9)	Construction		N/A
(L.9.1)	Transformer comply with 19.12 of IEC 61558-1 and 19 of IEC 61558-2-6		N/A
	HF transformer comply with 19 of IEC 61558-2-16		N/A
(L.10)	Components		N/A
	Protective devices comply with 20.6 – 20.11 of IEC 61558-1		N/A
(L.11)	Creepage distances, clearances and distances through insulation		N/A
	Creepage distances and clearances not less than in Clause 16		N/A
	Distance through insulation according Table L.5 in IEC 61347-1		N/A
	1) Basic distance through insulation		N/A
	Required distance (mm)		¾
	Measured (mm)		N/A
	Supplementary information		¾
	2) Supplementary distance through insulation		N/A
	Required distance (mm)		¾
	Measured (mm)		N/A
	Supplementary information		¾
	3) Reinforced distance through insulation		N/A
	Required distance (mm)		¾
	Measured (mm)		N/A
	Supplementary information		¾

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 2	TABLE: Critical components information					
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
LED (for model EL-SL58(S) series)	C	LUMILEDS	LUXEON 3030 2D	5.8-6.4V,0.05-0.2A	IEC 62031	Test with appliance
LED (for model EL-SL18MA series and EL-SL18LA series)	C	LUMILEDS	LUXEON 5050	If: 80-800mA;Vf: 5.8-6.6V	IEC 62031	Test with appliance
LED (for model EL-SL68(MINI), ELSL68(S) ELSL68(M) ELSL68(L) Series)	C	LUMILEDS	LUXEON 3030	If: 80-800mA;Vf: 5.8-6.6V	IEC 62031	Test with appliance
PC cover	C	Ningbo Skyzon Energy Co.,Limited	--	PC, GWT 650°C	IEC 62031	Test with appliance
MC-PCB for EL-SL18MA-30W	C	RUIHANG	1020200072	SL18M-14-luxeon5050-7S2P	IEC 62031	Test with appliance
			010701018126	SL18M-14-luxeon5050-7S2P		
MC-PCB for EL-SL18MA-40W	C	RUIHANG	1020200073	SL18M-18-luxeon5050-9S2P	IEC 62031	Test with appliance
			010701018127	SL18M-18-luxeon5050-9S2P		
MC-PCB for EL-SL18MA-50W	C	RUIHANG	1020200071	SL18M-24-luxeon5050-12S2P	IEC 62031	Test with appliance
			010701018125	SL18M-24-luxeon5050-12S2P		
MC-PCB for EL-SL18MA-60W	C	RUIHANG	1020200074	SL18M-28-luxeon5050-14S2P	IEC 62031	Test with appliance
			010701018128	SL18M-28-luxeon5050-14S2P		
MC-PCB for EL-SL18MA-80W	C	RUIHANG	1020200070	SL18M-36-luxeon5050-18S2P	IEC 62031	Test with appliance
			010701018124	SL18M-36-luxeon5050-18S2P		

IEC 62031						
Clause	Requirement + Test			Result - Remark		Verdict
MC-PCB for EL-SL18MA-90W	C	RUIHANG	1020200070	SL18M-36-luxeon5050-18S2P	IEC 62031	Test with appliance
			010701018124	SL18M-36-luxeon5050-18S2P		
MC-PCB for EL-SL18LA-90W	C	RUIHANG	1020200091	SL18L-24-luxeon5050-12S2P	IEC 62031	Test with appliance
			010701018213	SL18L-24-luxeon5050-12S2P		
MC-PCB for EL-SL18LA-100W	C	RUIHANG	1020200091	SL18L-24-luxeon5050-12S2P	IEC 62031	Test with appliance
			010701018213	SL18L-24-luxeon5050-12S2P		
MC-PCB for EL-SL18LA-120W	C	RUIHANG	1020200092	SL18L-28-luxeon5050-14S2P	IEC 62031	Test with appliance
			010701018214	SL18L-28-luxeon5050-14S2P		
MC-PCB for EL-SL18LA-160W	C	RUIHANG	1020200093	SL18L-36-luxeon5050-18S2P	IEC 62031	Test with appliance
			010701018215	SL18L-36-luxeon5050-18S2P		
MC-PCB for EL-SL58(S)-20W	C	RUIHANG	1020200427	SL58S-48-lumileds3030-8S6P	IEC 62031	Test with appliance
			010701058025	SL58S-48-lumileds3030-8S6P		
MC-PCB for EL-SL58(S)-30W	C	RUIHANG	1020200427	SL58S-48-lumileds3030-8S6P	IEC 62031	Test with appliance
			010701058025	SL58S-48-lumileds3030-8S6P		
MC-PCB for EL-SL58(S)-50W	C	RUIHANG	1020200590	SL58S-72-lumileds3030-18S4P	IEC 62031	Test with appliance
MC-PCB for EL-SL58(S)-60W	C	RUIHANG	1020200590	SL58S-72-lumileds3030-18S4P	IEC 62031	Test with appliance
MC-PCB for EL-SL68(MINI)-20W	C	RUIHANG	1020200638	SL68MINI-48-LUXEON3030-8S6P	IEC 62031	Test with appliance
MC-PCB for EL-SL68(MINI)-30W	C	RUIHANG	1020200638	SL68MINI-48-LUXEON3030-8S6P	IEC 62031	Test with appliance

IEC 62031						
Clause	Requirement + Test			Result - Remark		Verdict
MC-PCB for EL-SL68(MINI)-40W	C	RUIHANG	1020200639	SL68MINI-64-LUXEON3030-8S8P	IEC 62031	Test with appliance
MC-PCB for EL-SL68(MINI)-50W	C	RUIHANG	1020200639	SL68MINI-64-LUXEON3030-8S8P	IEC 62031	Test with appliance
MC-PCB for EL-SL68(S)-60W	C	RUIHANG	1020200616	SL68S-96-lumileds3030-8S12P	IEC 62031	Test with appliance
MC-PCB for EL-SL68(S)-80W	C	RUIHANG	1020200616	SL68S-96-lumileds3030-8S12P	IEC 62031	Test with appliance
MC-PCB for EL-SL68(S)-90W	C	RUIHANG	1020200617	SL68S-144-lumileds3030-8S18P	IEC 62031	Test with appliance
MC-PCB for EL-SL68(S)-100W	C	RUIHANG	1020200617	SL68S-144-lumileds3030-8S18P	IEC 62031	Test with appliance
MC-PCB for EL-SL68(M)-100W	C	RUIHANG	1020200642	SL68M-144-Luxeon3030-8S18P	IEC 62031	Test with appliance
MC-PCB for EL-SL68(M)-110W	C	RUIHANG	1020200642	SL68M-144-Luxeon3030-8S18P	IEC 62031	Test with appliance
MC-PCB for EL-SL68(M)-120W	C	RUIHANG	1020200642	SL68M-144-Luxeon3030-8S18P	IEC 62031	Test with appliance
MC-PCB for EL-SL68(L)-120W	C	RUIHANG	1020200666	SL68L-192-Luxeon3030-8S24P	IEC 62031	Test with appliance
MC-PCB for EL-SL68(L)-140W	C	RUIHANG	1020200666	SL68L-192-Luxeon3030-8S24P	IEC 62031	Test with appliance
MC-PCB for EL-SL68(L)-150W	C	RUIHANG	1020200666	SL68L-192-Luxeon3030-8S24P	IEC 62031	Test with appliance
<p>Supplementary information:</p> <p>¹⁾ Provided evidence ensures the agreed level of compliance. See OD-CB2039.</p> <p>The codes above have the following meaning:</p> <p>A - The component is replaceable with another one, also certified, with equivalent characteristics</p> <p>B - The component is replaceable if authorised by the test house</p> <p>C - Integrated component tested together with the appliance</p> <p>D - Alternative component</p>						

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 3	Screw terminals (part of the luminaire)		N/A
(14)	SCREW TERMINALS		N/A
(14.2)	Type of terminal.....:		¾
	Rated current (A).....:		¾
(14.3.2.1)	One or more conductors		N/A
(14.3.2.2)	Special preparation		N/A
(14.3.2.3)	Terminal size		N/A
	Cross-sectional area (mm²)		¾
(14.3.3)	Conductor space (mm)		N/A
(14.4)	Mechanical tests		N/A
(14.4.1)	Minimum distance		N/A
(14.4.2)	Cannot slip out		N/A
(14.4.3)	Special preparation		N/A
(14.4.4)	Nominal diameter of thread (metric ISO thread)	M	N/A
	External wiring		N/A
	No soft metal		N/A
(14.4.5)	Corrosion		N/A
(14.4.6)	Nominal diameter of thread (mm).....:		N/A
	Torque (Nm).....:		N/A
(14.4.7)	Between metal surfaces		N/A
	Lug terminal		N/A
	Mantle terminal		N/A
	Pull test; pull (N).....:		N/A
(14.4.8)	Without undue damage		N/A

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 4	Screwless terminals (part of the luminaire)		N/A
(15)	SCREWLESS TERMINALS		N/A
(15.2)	Type of terminal.....:		¾
	Rated current (A).....:		¾
(15.3.1)	Material		N/A
(15.3.2)	Clamping		N/A
(15.3.3)	Stop		N/A
(15.3.4)	Unprepared conductors		N/A
(15.3.5)	Pressure on insulating material		N/A
(15.3.6)	Clear connection method		N/A
(15.3.7)	Clamping independently		N/A
(15.3.8)	Fixed in position		N/A
(15.3.10)	Conductor size		N/A
	Type of conductor		N/A
(15.5.1)	Terminals internal wiring		N/A
(15.5.1.1)	Pull test spring-type terminals (4 N, 4 samples).....:		N/A
(15.5.1.2)	Pull test pin or tab terminals (4 N, 4 samples)		N/A
	Insertion force not exceeding 50 N		N/A
(15.5.1.2)	Permanent connections: pull-off test (20 N)		N/A
(15.5.2)	Electrical tests		N/A
	Voltage drop (mV) after 1 h (4 samples).....:		N/A
	Voltage drop of two inseparable joints		N/A
	Number of cycles:		¾
	Voltage drop (mV) after 10th alt. 25th cycle (4 samples)		N/A
	Voltage drop (mV) after 50th alt. 100th cycle (4 samples)		N/A
	After ageing, voltage drop (mV) after 10th alt. 25th cycle (4 samples)		N/A
	After ageing, voltage drop (mV) after 50th alt. 100th cycle (4 samples)		N/A
(15.6)	Terminals and connections for external wiring		N/A
(15.6.1)	Conductors		N/A
	Terminal size and rating		N/A
(15.6.2)	Mechanical tests		N/A

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
(15.6.2.1)	Pull test spring-type terminals or welded connections (4 samples); pull (N)		N/A
(15.6.2.2)	Pull test pin or tab terminals (4 samples); pull (N)		N/A
(15.6.3)	Electrical tests		N/A
	Tests according 15.6.3.1 + 15.6.3.2 in IEC 60598-1		N/A

(15.6.3.1) (15.6.3.2)	TABLE: Contact resistance test / Heating tests									N/A
	Voltage drop (mV) after 1 h									¾
terminal	1	2	3	4	5	6	7	8	9	10
voltage drop (mV)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Voltage drop of two inseparable joints									N/A
	Voltage drop after 10th alt. 25th cycle									N/A
	Max. allowed voltage drop (mV).....:									¾
terminal	1	2	3	4	5	6	7	8	9	10
voltage drop (mV)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Voltage drop after 50th alt. 100th cycle									N/A
	Max. allowed voltage drop (mV).....:									¾
terminal	1	2	3	4	5	6	7	8	9	10
voltage drop (mV)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Continued ageing: voltage drop after 10th alt. 25th cycle									N/A
	Max. allowed voltage drop (mV).....:									¾
terminal	1	2	3	4	5	6	7	8	9	10
voltage drop (mV)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Continued ageing: voltage drop after 50th alt. 100th cycle									N/A
	Max. allowed voltage drop (mV).....:									¾
terminal	1	2	3	4	5	6	7	8	9	10
voltage drop (mV)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Supplementary information:										

Appendix 2: Additional requirements of IEC/TR 62778:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

7	MEASUREMENT INFORMATION FLOW		P
7.1	Basic flow		P
	'Law of conservation of luminance' applied		P
	Use of only true luminance/radiance values		P
	In case of luminaire: The light source is operated in the luminaire under similar conditions as when tested as a component		P
	In case E_{thr} value for RG2 was established the peak value was derived from angular light distribution		N/A
7.2	Conditions for the radiance measurement		P
	Standard condition applied (200mm distance, 0,011rad field of view)		P
	Non-standard condition applied		P
7.3	Special cases (I): Replacement by a lamp or LED module of another type		N/A
	Light source is a white light source		N/A
	Evaluation done based on highest luminance		N/A
	Evaluation done based on CCT value		N/A
7.4	Special cases (II): Arrays and clusters of primary light sources		N/A
	LED package is evaluated as	<input type="checkbox"/> RG0 unlimited <input type="checkbox"/> RG1 unlimited	N/A
	E_{thr} of LED package applies to array		N/A
8	RISK GROUP CLASSIFICATION		P
	Risk group achieved:		P
	-.. Risk Group 0 unlimited	EL-SL58(S)-60 with LUMILEDS 3030, EL-SL18LA-160 with CREE, INC. chips of CX series	P
	-.. Risk Group 1 unlimited	EL-SL68(S)-50, EL-SL68-150 and EL-SL68S-100 with LUMILEDS LUXEON 3030, EL-SL18LA-160 with LUMILEDS 5050, EL-SL08(1L)-80 with CREE, INC. chips of XTE, EL-SL08(1L)-80 with CLU048 chips, EL-SL18LA-160 with OSRAM chips	P
	- E_{thr} (lx) : Distance to reach RG1 (m) :		N/A

According to the client's requirements, the measure distance for model EL-SL18LA-160 with LUMILEDS 5050 was changed to 2000mm and classified as RG0.

Appendix 2: Additional requirements of IEC/TR 62778:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

According to the client's requirements, the measure distance for model EL-SL68-150 with LUMILEDS LUXEON 3030 was changed to 2250mm and classified as RG0.

According to the client's requirements, the measure distance for model EL-SL68(S)-100 with LUMILEDS LUXEON 3030 was changed to 2250mm and classified as RG0.

TABLE: Spectroradiometric measurement					P
Measurement performed on:		<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire			
Model number..... :		EL-SL68(S)-50 with LUMILEDS LUXEON 3030			
Test voltage (V)..... :		240			¾
Test current (mA)..... :		232			¾
Test frequency (Hz)..... :		50			¾
Ambient, t (°C)..... :		25			¾
Measurement distance		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm			¾
Source size		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small: mm			¾
Field of view		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)			¾
Item	Symb ol	Units	Result	Remark	
Correlated colour temperature	CCT	K	4102		
x/y colour coordinates			/		
Blue light hazard radiance	L _B	W/(m²•sr¹)	201,0	RG1	
Blue light hazard irradiance	E _B	W/m²	5,822		
Luminance	L	cd/m²	3,823 x 10 ⁵		
Illuminance	E	lx	11073		
Supplementary information:					

Appendix 2: Additional requirements of IEC/TR 62778:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

TABLE: Spectroradiometric measurement					P
	Measurement performed on:		<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire		
	Model number		EL-SL18LA-160 with LUMILEDS 5050 (If: 800 mA)		
	Test voltage (V)		240		¾
	Test current (mA)		-		¾
	Test frequency (Hz)		50/60		¾
	Ambient, t (°C)		25		¾
	Measurement distance.....		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		¾
	Source size		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small : mm		¾
	Field of view		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		¾
Item		Symbol	Units	Result	Remark
Correlated colour temperature		CCT	K	3964	
x/y colour coordinates				/	
Blue light hazard radiance		L _B	W/(m²•sr¹)	1,378 x10³	RG1
Blue light hazard irradiance		E _B	W/m²	3,143x10	
Luminance		L	cd/m²	2,783x10⁶	
Illuminance		E	lx	63471	
Supplementary information: N/A					

Appendix 2: Additional requirements of IEC/TR 62778:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

TABLE: Spectroradiometric measurement				P
	Measurement performed on:	<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire		
	Model number	EL-SL18LA-160 with LUMILEDS 5050 (If: 800 mA)		
	Test voltage (V)	240		¾
	Test current (mA)	-		¾
	Test frequency (Hz)	50/60		¾
	Ambient, t (°C)	25		¾
	Measurement distance	<input type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		¾
	Source size	<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small : mm		¾
	Field of view	<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		¾
Item	Symbol	Units	Result	Remark
Correlated colour temperature	CCT	K	3938	
x/y colour coordinates			/	
Blue light hazard radiance	L _B	W/(m ² •sr ¹)	8,063 x10	RG0
Blue light hazard irradiance	E _B	W/m ²	7,756x10 ⁻¹	
Luminance	L	cd/m ²	1,647x10 ⁵	
Illuminance	E	lx	1584	
Supplementary information:				

Appendix 2: Additional requirements of IEC/TR 62778:2014				
Clause	Requirement + Test		Result - Remark	
	TABLE: Spectroradiometric measurement			P
	Measurement performed on:	<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire		
	Model number.....	EL-SL18LA-160 with LUMILEDS 5050 (If: 160 mA)		
	Test voltage (V).....	240		¾
	Test current (mA).....	-		¾
	Test frequency (Hz)	50/60		¾
	Ambient, t (°C).....	25		¾
	Measurement distance	<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		¾
	Source size	<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small : mm		¾
	Field of view	<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		¾
Item	Symb ol	Units	Result	Remark
Correlated colour temperature	CCT	K	6896	
x/y colour coordinates			/	
Blue light hazard radiance	L _B	W/(m ² •sr ¹)	3,286 x 10 ³	RG1
Blue light hazard irradiance	E _B	W/m ²	6,642	
Luminance	L	cd/m ²	3,339 x 10 ⁶	
Illuminance	E	lx	6749	
Supplementary information:				

Appendix 2: Additional requirements of IEC/TR 62778:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

TABLE: Spectroradiometric measurement					P
	Measurement performed on:		<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire		
	Model number.....		EL-SL58(S)-60 with LUMILEDS 3030		
	Test voltage (V).....		240		¾
	Test current (mA).....		-		¾
	Test frequency (Hz)		50/60		¾
	Ambient, t (°C).....		25		¾
	Measurement distance		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		¾
	Source size		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small : mm		¾
	Field of view		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		¾
Item		Symbol	Units	Result	Remark
Correlated colour temperature		CCT	K	4005	
x/y colour coordinates				/	
Blue light hazard radiance		L _B	W/(m²•sr¹)	6,704 x10	RG0
Blue light hazard irradiance		E _B	W/m²	7,713	
Luminance		L	cd/m²	1,347x10 ⁵	
Illuminance		E	lx	15495	
Supplementary information: N/A					

Appendix 2: Additional requirements of IEC/TR 62778:2014				
Clause	Requirement + Test		Result - Remark	
	TABLE: Spectroradiometric measurement			P
	Measurement performed on:	<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire		
	Model number.....	EL-SL08(1L)-80 with CREE, INC. chips of XTE		
	Test voltage (V).....	240		¾
	Test current (mA).....	-		¾
	Test frequency (Hz)	50/60		¾
	Ambient, t (°C).....	25		¾
	Measurement distance	<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		¾
	Source size	<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small : mm		¾
	Field of view	<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		¾
Item	Symb ol	Units	Result	Remark
Correlated colour temperature	CCT	K	5737	
x/y colour coordinates			/	
Blue light hazard radiance	L _B	W/(m ² •sr ¹)	5,958 x10 ³	RG1
Blue light hazard irradiance	E _B	W/m ²	45,67	
Luminance	L	cd/m ²	7,467x10 ⁶	
Illuminance	E	lx	57237	
Supplementary information: N/A				

Appendix 2: Additional requirements of IEC/TR 62778:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

TABLE: Spectroradiometric measurement					P
	Measurement performed on:		<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire		
	Model number.....		EL-SL08(1L)-80 with CLU048 chips		
	Test voltage (V).....		240		¾
	Test current (mA).....		-		¾
	Test frequency (Hz)		50/60		¾
	Ambient, t (°C).....		25		¾
	Measurement distance		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		¾
	Source size		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small : mm		¾
	Field of view		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		¾
Item		Symbol	Units	Result	Remark
Correlated colour temperature		CCT	K	5599	
x/y colour coordinates				/	
Blue light hazard radiance		L _B	W/(m²•sr¹)	6,525 x10³	RG1
Blue light hazard irradiance		E _B	W/m²	34,45	
Luminance		L	cd/m²	8,92x10⁶	
Illuminance		E	lx	47089	
Supplementary information: N/A					

Appendix 2: Additional requirements of IEC/TR 62778:2014						
Clause	Requirement + Test			Result - Remark		Verdict
	TABLE: Spectroradiometric measurement					P
	Measurement performed on:			<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire		
	Model number			EL-SL18LA-160 with CREE, INC. chips of CX series		
	Test voltage (V)			240		¾
	Test current (mA)			0,68		¾
	Test frequency (Hz)			50/60		¾
	Ambient, t (°C)			25		¾
	Measurement distance.....			<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		¾
	Source size			<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small: mm		¾
	Field of view			<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		¾
Item		Symbol	Units	Result	Remark	
Correlated colour temperature		CCT	K	5534		
x/y colour coordinates				/		
Blue light hazard radiance		L _B	W/(m²•sr¹)	55	RG0	
Blue light hazard irradiance		E _B	W/m²	10,15		
Luminance		L	cd/m²	7,147 x10⁴		
Illuminance		E	lx	26169		
Supplementary information:						

Appendix 2: Additional requirements of IEC/TR 62778:2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

	TABLE: Spectroradiometric measurement				P
	Measurement performed on:	<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire			
	Model number	EL-SL18LA-160 with OSRAM chips			
	Test voltage (V)	240			¾
	Test current (mA)	0,68			¾
	Test frequency (Hz)	50/60			¾
	Ambient, t (°C)	25			¾
	Measurement distance	<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm			¾
	Source size	<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small: mm			¾
	Field of view	<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)			¾
Item		Symbol	Units	Result	Remark
Correlated colour temperature		CCT	K	5883	
x/y colour coordinates				/	
Blue light hazard radiance		L _B	W/(m ² •sr ¹)	104	RG1
Blue light hazard irradiance		E _B	W/m ²	2,806	
Luminance		L	cd/m ²	1,251 x 10 ⁵	
Illuminance		E	lx	28801	
Supplementary information:					


Appendix 2: Additional requirements of IEC/TR 62778:2014					
Clause	Requirement + Test		Result - Remark	Verdict	
	TABLE: Spectroradiometric measurement			P	
	Measurement performed on:	<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire			
	Model number	EL-SL68-150 with LUMILEDS LUXEON 3030			
	Test voltage (V)	240		¾	
	Test current (mA)	N/A		¾	
	Test frequency (Hz)	50/60		¾	
	Ambient, t (°C)	25		¾	
	Measurement distance	<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		¾	
	Source size	<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small: mm		¾	
	Field of view	<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		¾	
	Item	Symbol	Units	Result	Remark
	Correlated colour temperature	CCT	K	/	
	x/y colour coordinates			/	
	Blue light hazard radiance	L _B	W/(m²•sr¹)	5,794x10²	RG1
	Blue light hazard irradiance	E _B	W/m²	1,323x10¹	
	Luminance	L	cd/m²	1,274x10⁶	
	Illuminance	E	lx	29099	
Supplementary information:					

Appendix 1: Additional requirements of IEC/TR 62778:2014			
Clause	Requirement + Test	Result - Remark	Verdict

TABLE: Spectroradiometric measurement					P
	Measurement performed on:		<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire		
	Model number		EL-SL68(S)-100 with LUMILEDS LUXEON 3030		
	Test voltage (V)		240		¾
	Test current (mA)		N/A		¾
	Test frequency (Hz)		50/60		¾
	Ambient, t (°C)		25		¾
	Measurement distance		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		¾
	Source size		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small: mm		¾
	Field of view		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		¾
Item		Symb ol	Units	Result	Remark
Correlated colour temperature		CCT	K	/	
x/y colour coordinates				/	
Blue light hazard radiance		L _B	W/(m ² •sr ¹)	7,006x10 ²	RG1
Blue light hazard irradiance		E _B	W/m ²	1,944x10 ¹	
Luminance		L	cd/m ²	1,488x10 ⁶	
Illuminance		E	lx	41286	
Supplementary information:					

Appendix 2: Photographs

Over view EL-SL18LA-160W

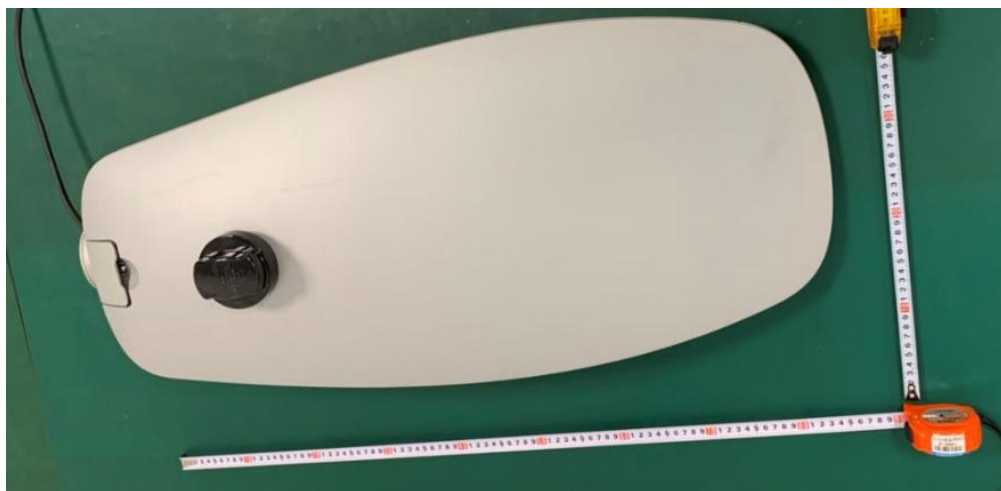

Over view EL-SL18LA-160W

Appendix 2: Photographs

Over view (EL-SL18MA-80W)



Over view (EL-SL18MA-80W)

Appendix 2: Photographs


LED module for model EL-SL18LA-160W




LED module for model EL-SL18LA-160W

Appendix 2: Photographs


LED module for model EL-SL18LA-160W

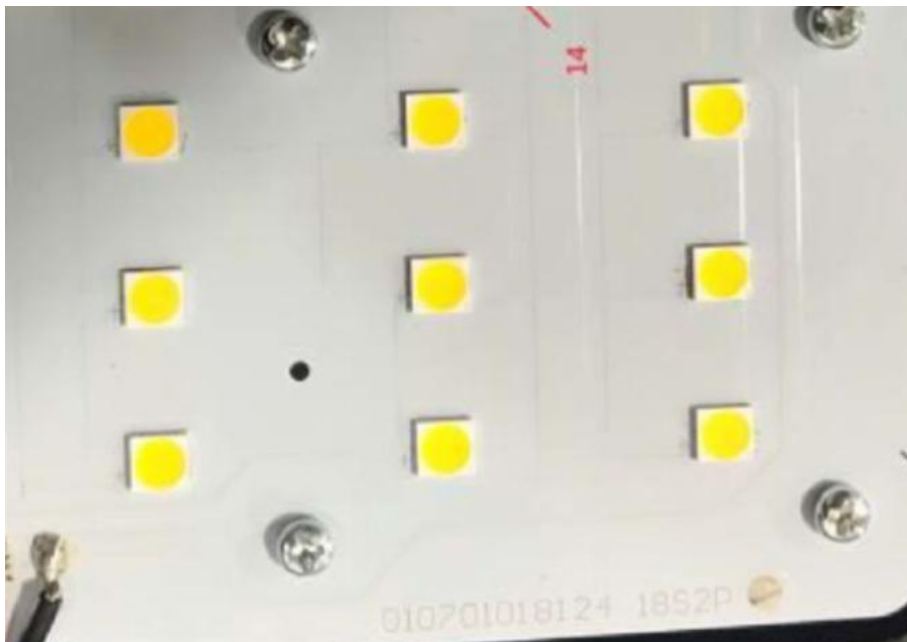


LED module for model EL-SL18MA-80W

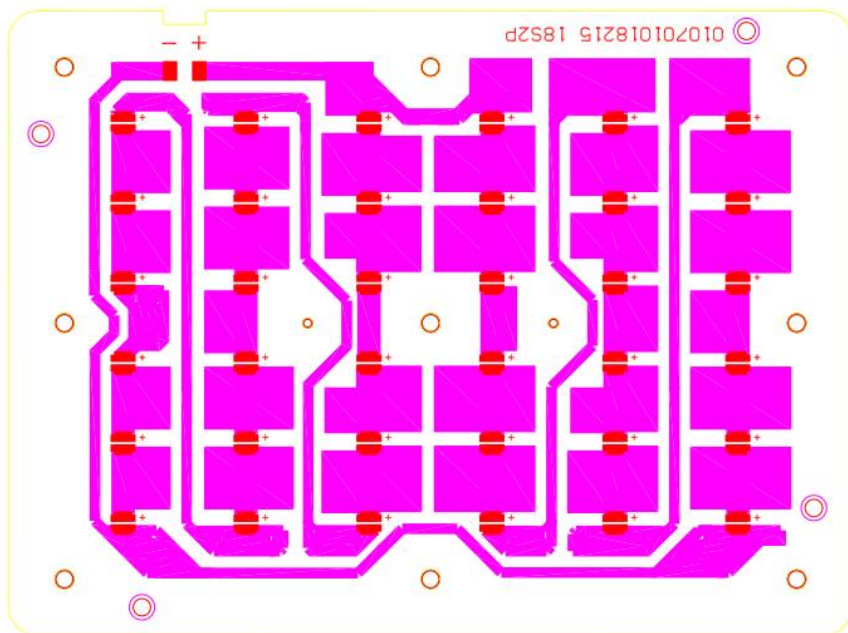Appendix 2: Photographs


EL-SL18LA-160W

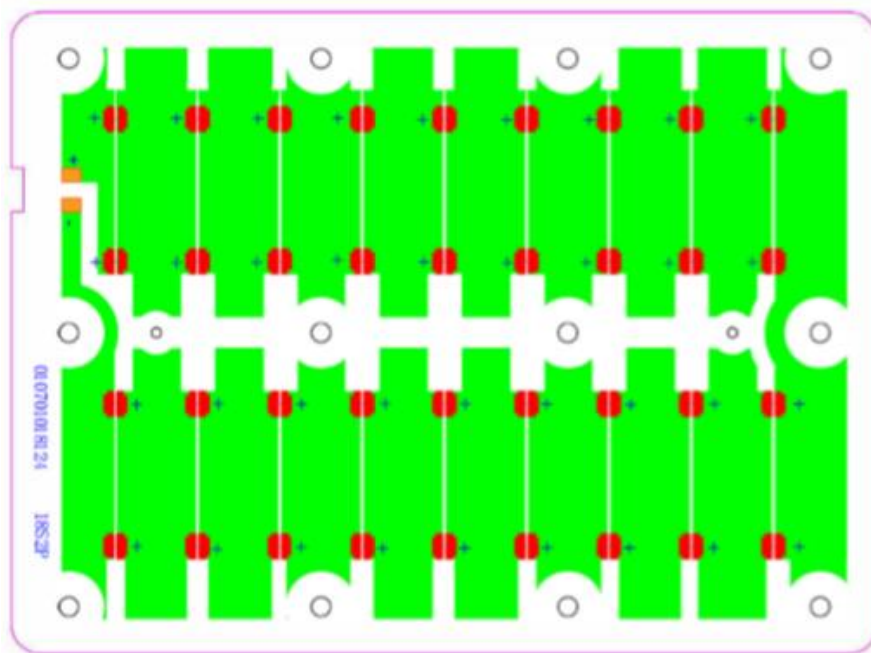


EL-SL18MA-80W

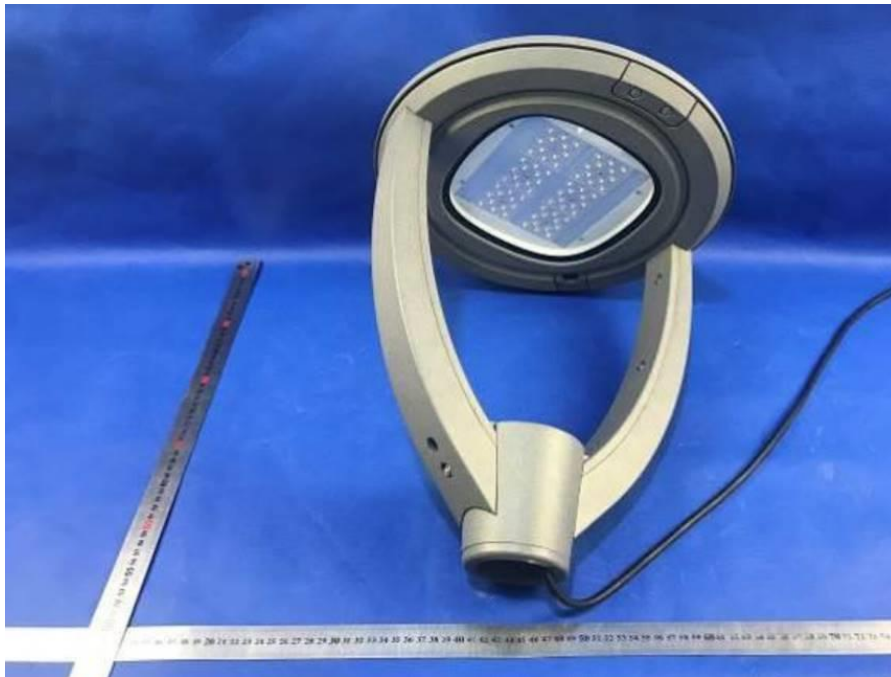Appendix 2: Photographs


Over view EL-SL58(S)-60W

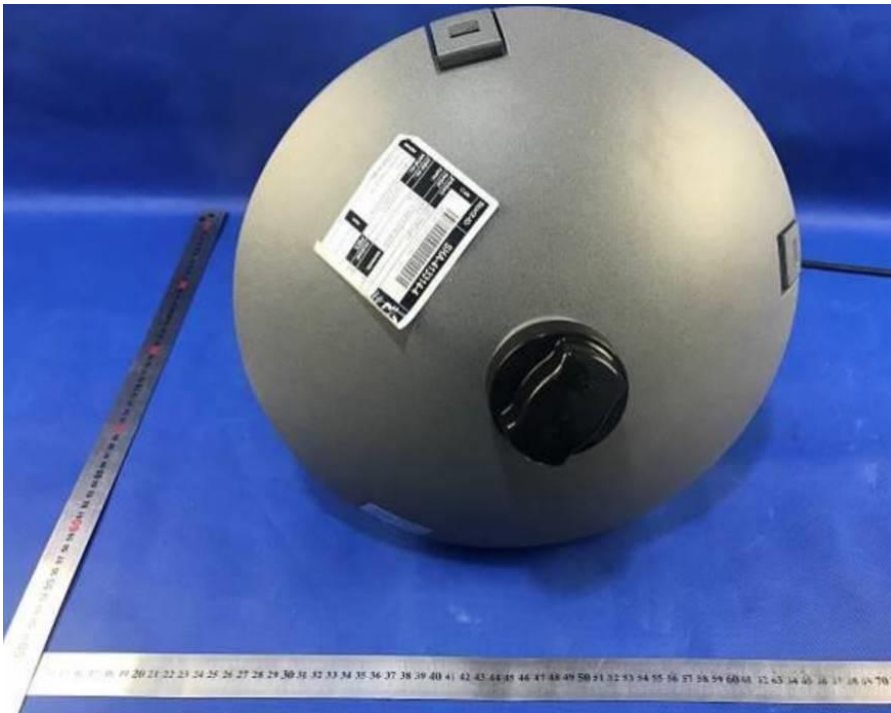


Over view EL-SL58(S)-60W

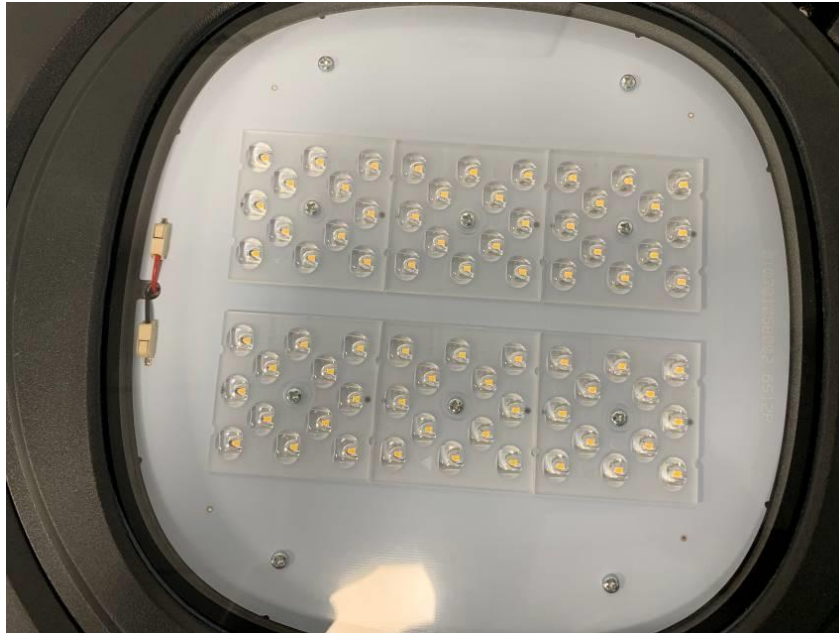Appendix 2: Photographs


LED module for model EL-SL58(S)-60W

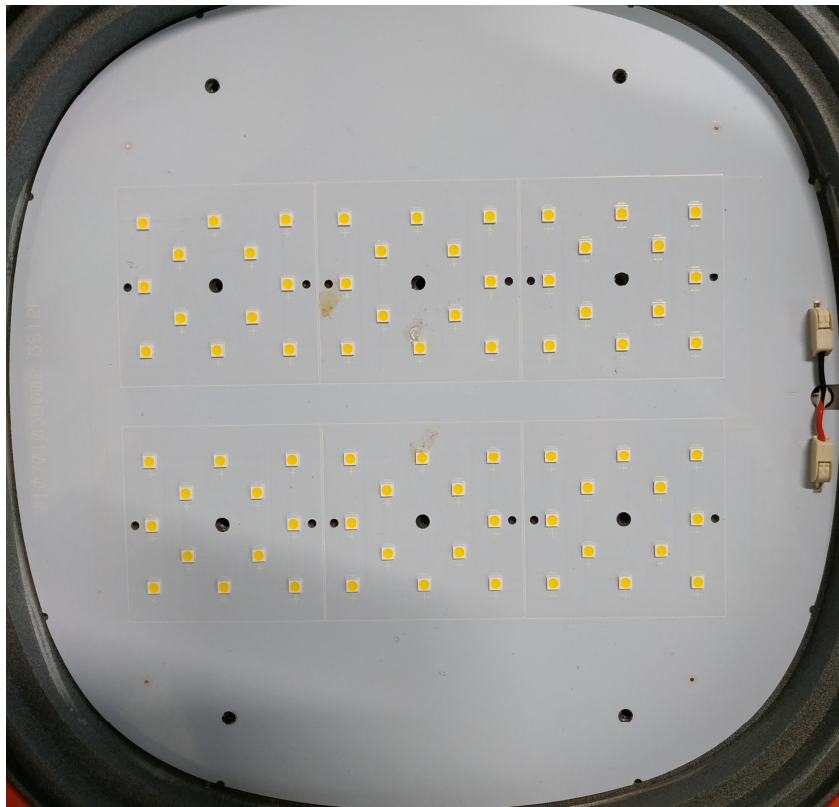

LED module for model EL-SL58(S)-60W

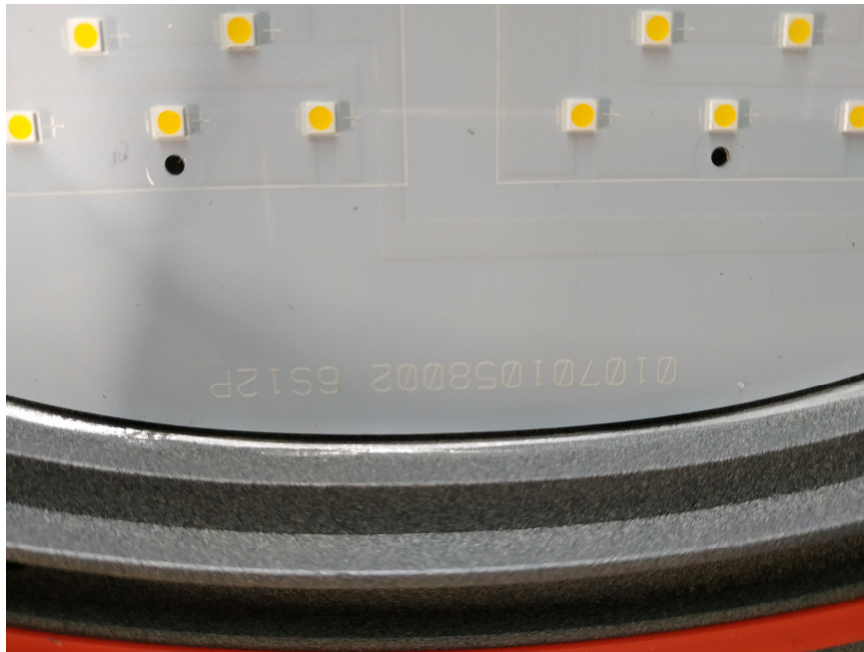Appendix 2: Photographs

LED module for model EL-SL58(S)-60W

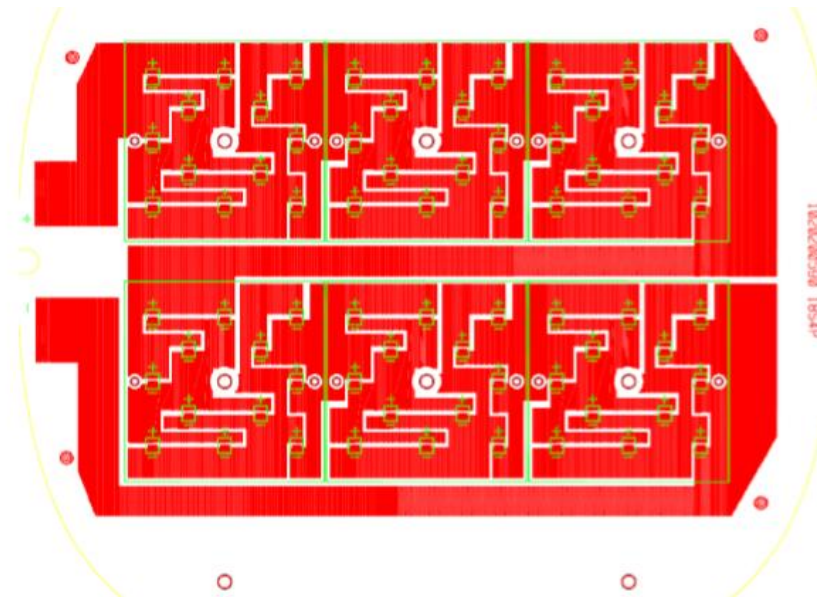


LED module for EL-SL58(S)-60W

Appendix 2: Photographs


Over view (EL-SL68(MINI)-30W)




Over view (EL-SL68(MINI)-30W)

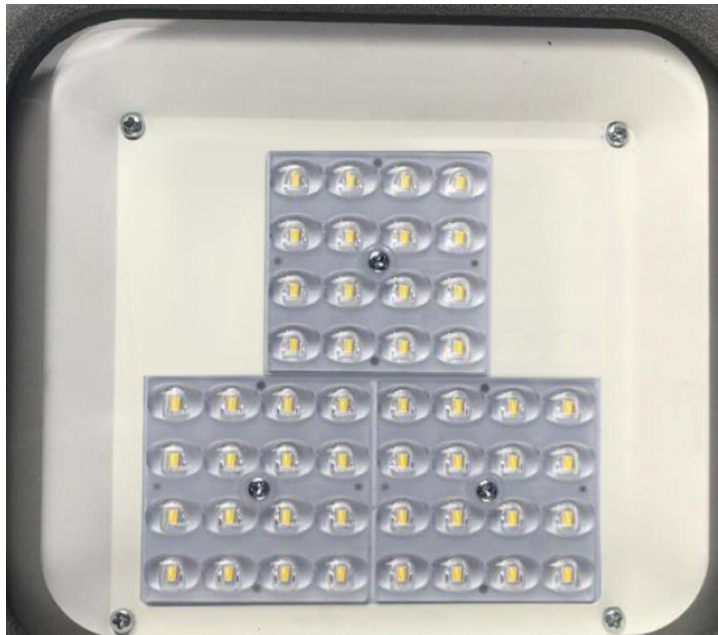Appendix 2: Photographs

LED Module for (EL-SL68(MINI))-30W)

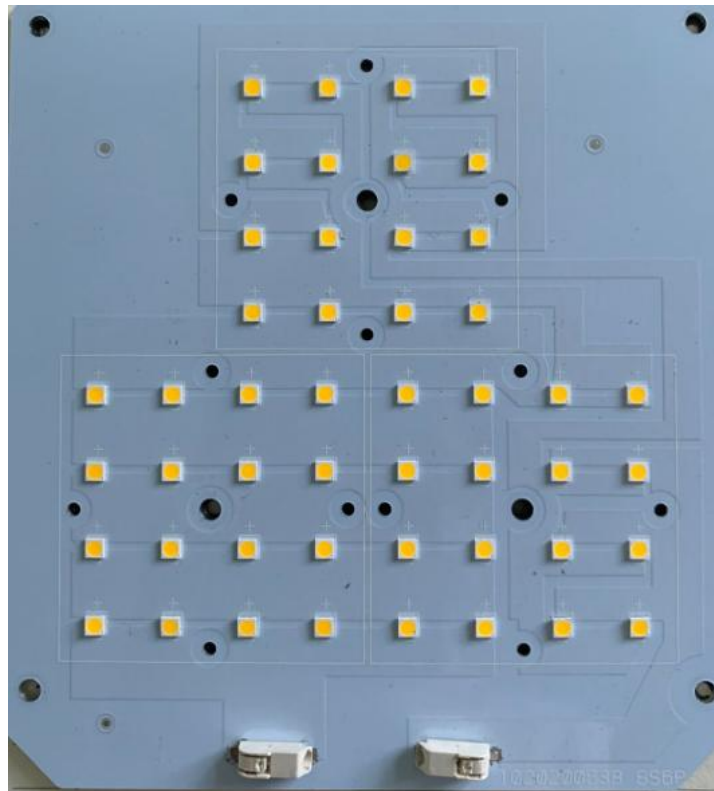

LED Module for (EL-SL68(MINI))-30W)

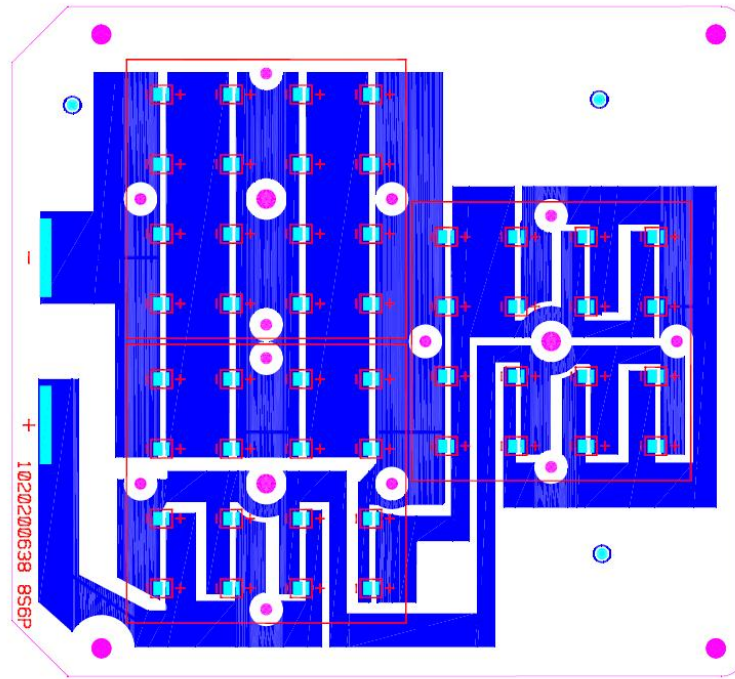Appendix 2: Photographs

LED Module for (EL-SL68(MINI)-30W)




Over view (EL-SL68(MINI)-50W)

Appendix 2: Photographs

Over view (EL-SL68(MINI)-50W)



LED module for model EL-SL68(MINI)-50W

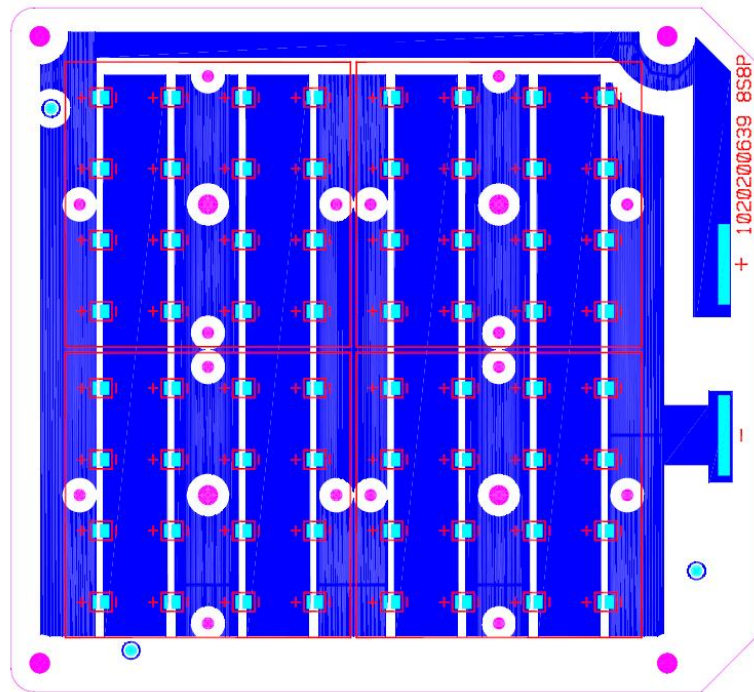Appendix 2: Photographs

LED module for model EL-SL68(MINI)-50W




Over View for EL-SL68(S)-80W

Appendix 2: Photographs

Over View for EL-SL68(S)-80W



LED module for model EL-SL68(S)-80W

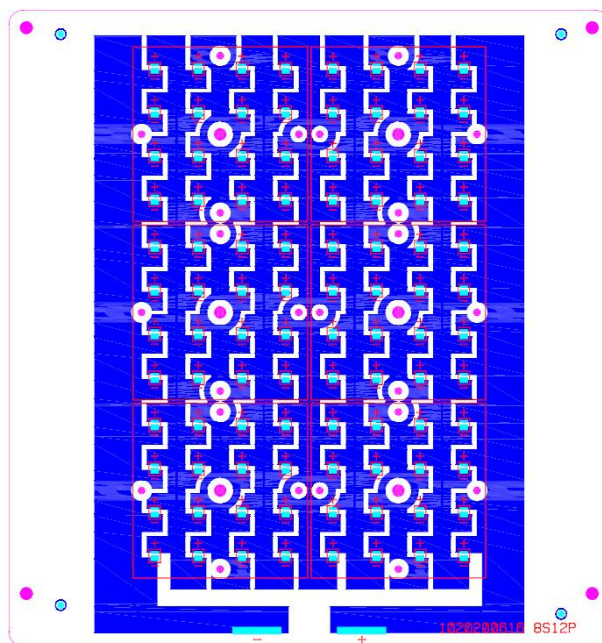Appendix 2: Photographs


LED module for model EL-SL68(S)-80W




Over View for EL-SL68(S)-100W

Appendix 2: Photographs

Over View for EL-SL68(S)-100W

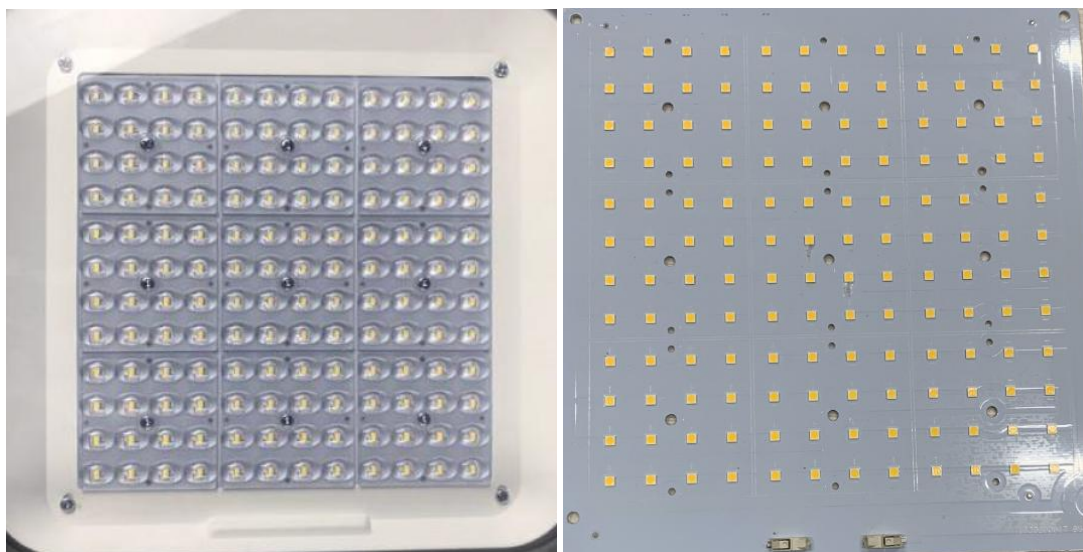

LED module for model EL-SL68(S)-100W

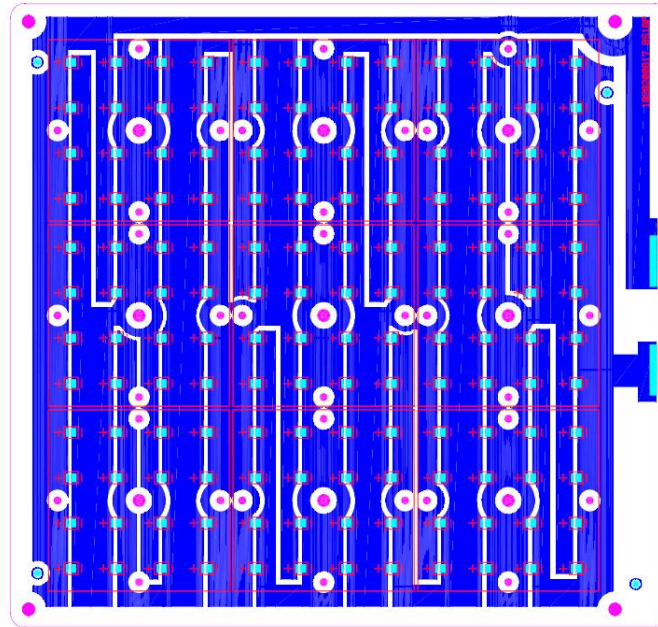Appendix 2: Photographs


LED module for model EL-SL68(S)-100W




Over View for EL-SL68(M)-120W

Appendix 2: Photographs

Over View for EL-SL68(M)-120W

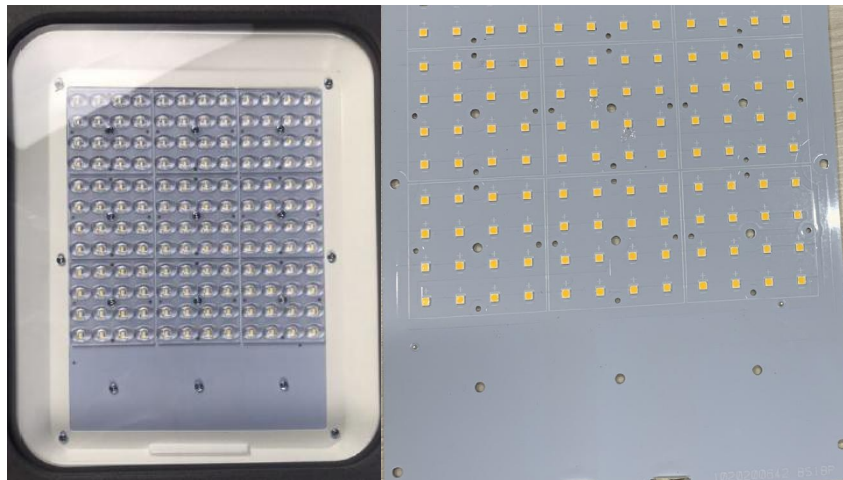

LED module for model EL-SL68(M)-120W

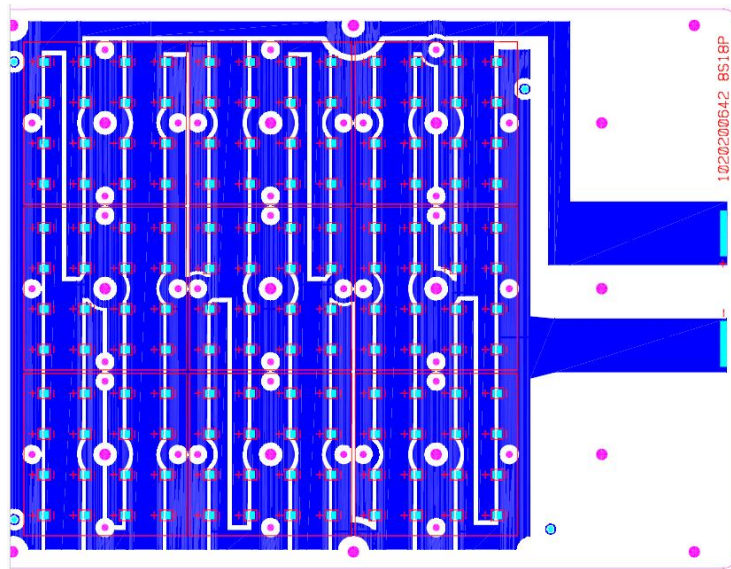Appendix 2: Photographs


LED module for model EL-SL68(M)-120W




Over View for EL-SL68(L)-150W

Appendix 2: Photographs

Over View for EL-SL68(L)-150W

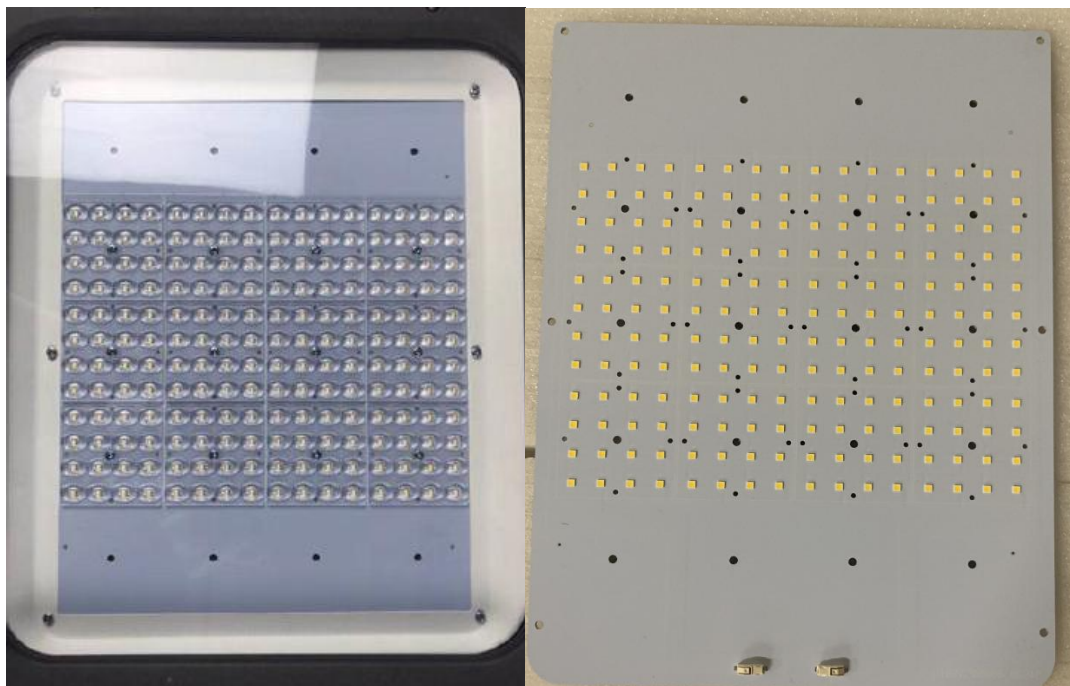

LED module for model EL-SL68(L)-150W

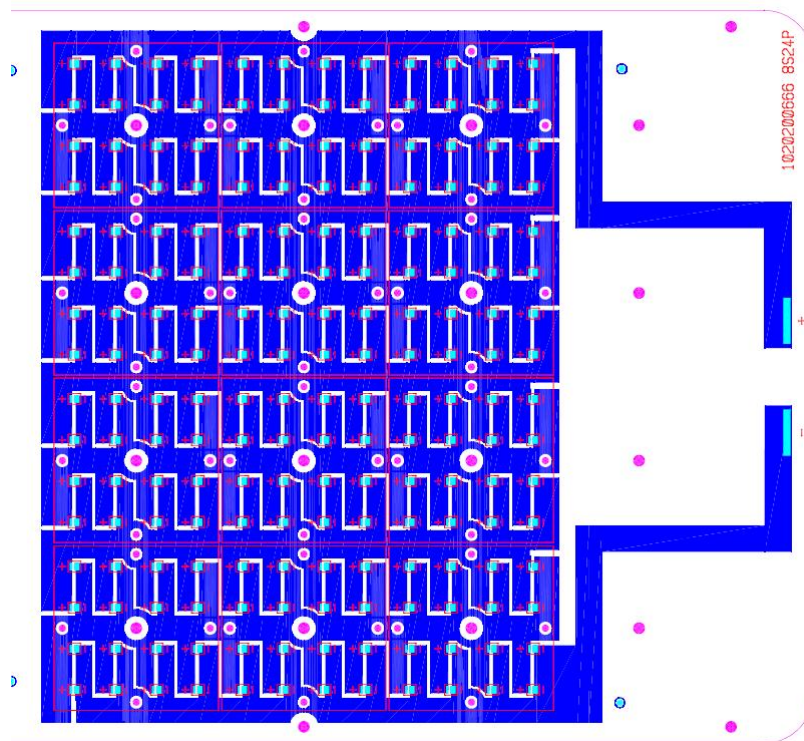Appendix 2: Photographs

LED module for model EL-SL68(L)-150W